




MIDILED XAL25

25 Watts / 3170 Lumens / 90+ CRI

Recessed 'Anti-Ligature' LED Downlight featuring a single 25W COB LED. Featuring 6mm polycarbonate front lens and recessed security screws for tamper proof anti-ligature finish. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI (Cyanosis Compliant option also available). Large passive heatsink for effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

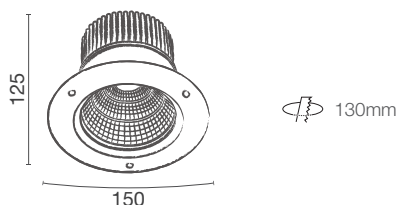

System Power	26.78W	IP Rating	IP65
LED Power	25W	IK Rating	IK10
Cut-Out	130mm	Weight	505g

	2700K	3000K	4000K	5000
COB Lumen Output	2990 lm	3035 lm	3170 lm	3205 lm
Total Luminous Flux	2306 lm	2344 lm	2441 lm	2461 lm

Efficacy	91.15 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Optional: Leading + Trailing Edge Dali 1-10v		
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95



Concealed Recessing Ring

Product	CCT	Beam Angle	Trim Colour	Driver
XAL25	2700K 2.7	Wide Beam WB	White W	Leading + Trailing
	3000K 3	Medium Beam MB	Black B	DALI* DALI
	4000K 4	Narrow Beam NB	Silver S	1-10v* 1-10
	5000K 5			
XAL25	3	WB	W	

XAL253-WB-W

* Optional



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au