




MIDILED XDM10

10 Watts / 1390 Lumens / 90+ CRI



Recessed adjustable 10W downlight featuring a single COB LED. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Sealed face with silicone gasket for increased ingress protection and large passive heatsink for effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

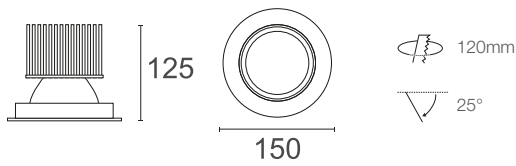

System Power	11.7W	Cut-Out	120mm
LED Power	10W	Tilt-Angle	25°
IP Rating	IP20	Weight	505g

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	1300 lm	1335 lm	1390 lm	1410 lm	VIVID	1080 lm	1120 lm	1150 lm
Total Luminous Flux	1055 lm	1082 lm	1126 lm	1142 lm	VIVID	881 lm	913 lm	936 lm

Efficacy	93.68 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Leading + Trailing Edge	Optional: Dali	1-10v
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

Product	CCT	Light Source	Beam Angle	Trim Colour	Insert Colour	Driver
XDM10	2700K 2.7	90+ CRI	Wide Beam WB	White W	Black Insert BT	Leading + Trailing
	3000K 3	VIVID* V	Medium Beam MB	Black B	White Insert* WT	DALI* DALI
	4000K 4		Narrow Beam NB	Silver S	Silver Insert* ST	1-10v* 1-10
	5000K 5				Gold Insert* GT	
XDM10	3		WB	W	WT	

XDM103-WB-W-WT

* Optional