




# MIDILED XDMS25

25 Watts / 31700 Lumens / 90+ CRI



Recessed adjustable 25W downlight featuring a single COB LED. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Large passive heatsink for effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

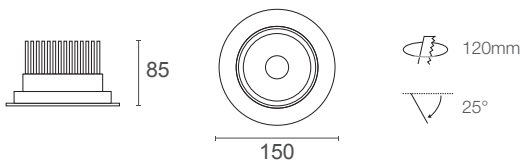

System Power	26.4W	Cut-Out	120mm
LED Power	25W	Tilt-Angle	25°
IP Rating	IP20	Weight	505g

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	2990 lm	3035 lm	3170 lm	3205 lm	VIVID	2570 lm	2650 lm	2725 lm
Total Luminous Flux	2098 lm	2131 lm	2228 lm	2253 lm	VIVID	1795 lm	1853 lm	1910 lm

Efficacy	84.93 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Leading + Trailing Edge	Optional: Dali	1-10v
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95



XDMS253-WB-W-BT

\* Optional