




# MINILED XDS25

25 Watts / 3170 Lumens / 90+ CRI



Fixed 25W downlight featuring a single COB LED. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Sealed face with silicone gasket for increased ingress protection and large passive heatsink for effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

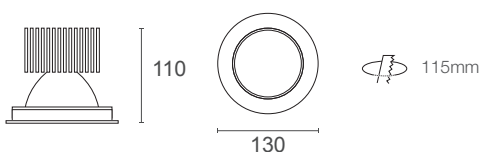

System Power	26.4W	Cut-Out	115mm
LED Power	25W	Weight	370g
IP Rating	IP44		

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	2990 lm	3035 lm	3170 lm	3205 lm	VIVID	2570 lm	2650 lm	2725 lm
Total Luminous Flux	2186 lm	2219 lm	2316 lm	2341 lm		1883 lm	1941 lm	1995 lm

Efficacy	86.59 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Optional: Leading + Trailing Edge Dali 1-10v		
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

Product	CCT	Light Source	Beam Angle	Trim Colour	Driver
XDS25	2700K 2.7	90+ CRI	Wide Beam WB	White W	non dimmable
	3000K 3	VIVID* V	Medium Beam MB	Black B	Leading + Trailing* DIM
	4000K 4		Narrow Beam NB	Silver S	DALI* DALI
	5000K 5				
XDS25	3		WB	W	

XDS253-WB-W

\* Optional



**TREND**  
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020  
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au