


# MIDILED XMB225

2 x 25 Watts / 2 x 3170 Lumens / 90+ CRI




Recessed Square LED downlight featuring a 2 x 25W COB LED Light Engines. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Anodized black heatsink for effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

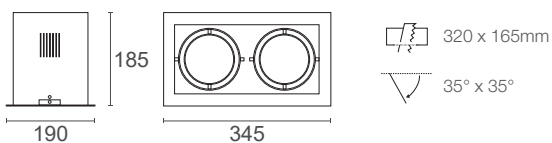

System Power	52.8W	Cut-Out	320 x 165mm
LED Power	2 x 25W	Tilt-Angle	35° x 35°
IP Rating	IP20	Weight	3795g

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	2 x 2990 lm	2 x 3035 lm	2 x 3170 lm	2 x 3205 lm	VIVID	2 x 2570 lm	2 x 2650 lm	2 x 2725 lm
Total Luminous Flux	2 x 2156 lm	2 x 2189 lm	2 x 2286 lm	2 x 2311 lm		2 x 1853 lm	2 x 1911 lm	2 x 1965 lm

Efficacy	86.59 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Optional: Leading + Trailing Edge Dali		
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

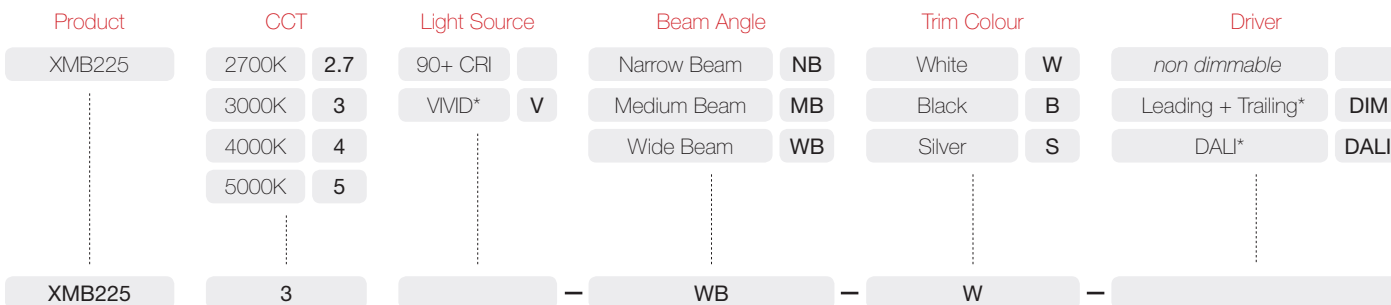

XMB225-WB-W

\* Optional



**TREND**  
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020  
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au