




MIDILED XMC325

 $3 \times 25 \text{ Watts} / 3 \times 3100 \text{ Lumens} / 90 + \text{CRI}$


Recessed Square LED downlight featuring 3 x 25W COB LED Light Engines. Available in 3000K and 4000K colour temperature options in 90+ CRI. Anodized black heatsink for effective thermal management ensuring high output and long lifespan. Supplied with remote driver.



System Power	79.2W	Cut-Out	455 x 160mm
LED Power	3 x 25W	Tilt-Angle	35° x 35°
IP Rating	IP20	Weight	2850g

	3000K	4000K	
COB Lumen Output	3 x 2950 lm	3 x 3100 lm	
Total Luminous Flux	3 x 2057 lm	3 x 2204 lm	

Efficacy	83.48 lm/W 4000K	Lifetime	50,000hrs (L80)					
Dimming	Optional: DALI							
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit	Power Factor	> 0.95			

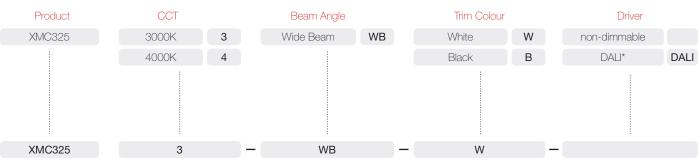

XMC3253-WB-W