




LED SPOT XTL40


40 Watts / 4340 Lumens / 90+ CRI

40W Architectural LED spotlight with a single Japanese made COB LED with integral driver. High colour rendering index of 90+, high lumen output and a low power consumption make the XTL40 an ideal replacement for where 70W Metal halide fittings would traditionally be used. A fully adjustable design with 355° rotation and 180° tilt allow for design flexibility in a wide range of lighting applications. Integrally mounted aluminium heatsink with black anodized finish provides effective thermal management ensuring continued high light output and long lifespan.

XTL40 Dimensions

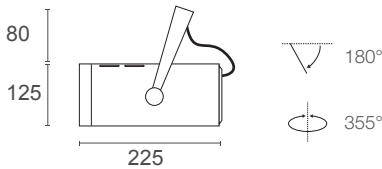

XTL40 Trim Colours

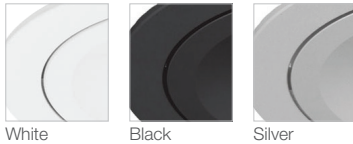

XTL40 Accessories

- DALI Track Connector
- Surface Mount

Input Voltage 240V

System Power 39.1W

LED Power 36.2W

Lamp Type LED

IP Rating IP20

Tilt-Angle 180°


Rotation 355°

Weight 1325g

XTL40 Technical Specifications

	3000K	4000K	5000K
COB Lumen Output	3800 lm	4000 lm	4200 lm
Total Luminous Flux	2655 WB	2795 WB	2935 WB
Efficacy	72 lm/W	Wide Beam	
Lifetime	50,000hrs (L70)		
Power Factor	> 0.95		
Input Voltage	100V - 240V AC 50/60 Hz		
Protection	Thermal and Short Circuit		
Dimming	DALI* Available on request		

XTL40 Order Code

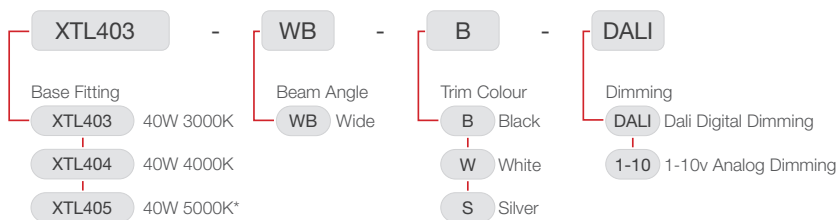

TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au