


MINILED XMA310

3 x 10.5 Watts / 3 x 1390 Lumens / 90+ CRI



3x10 Watt square LED downlight featuring 3 light engines, each with a single COB LED design available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. The Miniled range is supplied with remote driver.

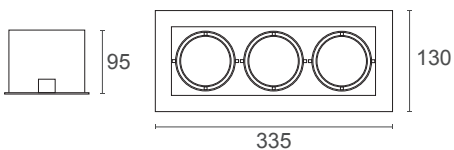


315 x 115mm

35° x 35°

System Power	35.1W	Cut-Out	315 x 115mm
LED Power	2 x 10.5W	Tilt-Angle	35° x 35°
IP Rating	IP20	Weight	510g

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	3 x 1300 lm	3 x 1335 lm	3 x 1390 lm	3 x 1410 lm	VIVID	3 x 1080 lm	3 x 1120 lm	3 x 1150 lm
Total Luminous Flux	3 x 1025 lm	3 x 1052 lm	3 x 1096 lm	3 x 1112 lm		3 x 851 lm	3 x 883 lm	3 x 906 lm

Efficacy	93.68 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Leading + Trailing Edge	Optional: Dali	1-10v
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

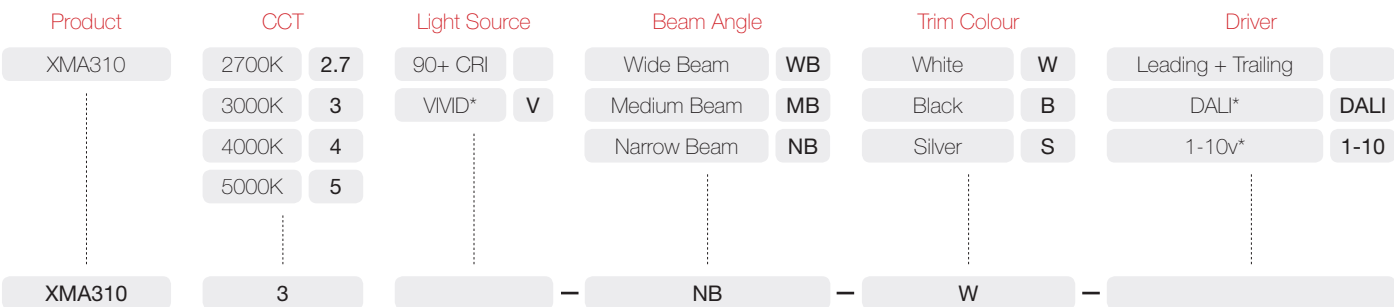

XMA3103-NB-W

* Optional



TREND
LIGHT BY SOLID STATE

Level 3, 290-292 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au