

25W LED Tube 3K IP66 with 1M Conn each end

VBLFT-730-F-30



VIBE Lighting's 25W, 3K LED Poultry Farm System provides the ultimate lighting solution for increased egg output, lower mortality, longer peak production period and improved animal welfare. The intelligent system produces no UV or IR light radiation, is humidity proof, shatterproof & waterproof. Easy to install, (ceiling or suspended installation) the tubes can be connected in a series to accommodate various sized sheds with a host of accessories to suit. Contact your Sales Representative for a tailored quote.

Features & Benefits

- Precise dimming without flicker
- Ammonia & Acid resistant (perfect for poultry industry)
- 360° adjustable (rotatable end caps)
- No UV or IR light emitted
- Excellent thermal efficiency
- IP66 (waterproof, dustproof, shatterproof & humidity proof)
- IK08 (impact rating)
- 50,000 hours lifespan
- 3 years warranty




25W LED Tube 3K IP66 with 1M Conn each end


VBLFT-730-F-30

Specifications


SKU	VBLFT-730-F-30
Luminaire efficacy	115 lm/W
EAN	9340994019031
Light Colour	Warm White
Wattage	25 W
Lumen output	2875 lm
IP rating	66
IK Rating	8
CRI	80
Beam Angle	120 Degrees
Trim colour	White
Base Type	T8
Diameter	28 mm
Length	1226 mm
Lifespan	50000 Hours
Warranty	3 Years
Dimmable	Dimmable
Shatterproof	Shatterproof
Mounting type	Ceiling / Suspended
LED source	SMD
Lamp Type	LED
Input voltage	240 Volt AC 50HZ
Diffuser	Frosted
Wiring method	Flex & Plug
Weatherproof	Weatherproof
Working temperature	-20°C ~ 40°C
Box Qty	25
Kelvin	3000K

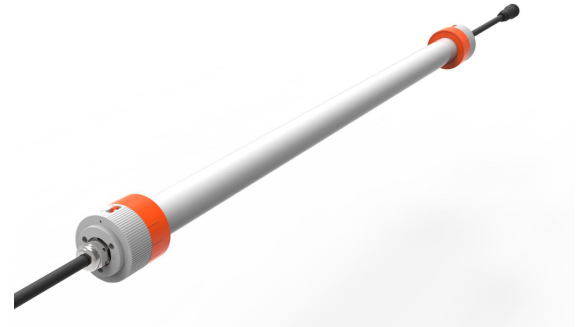

Dimensional Drawings

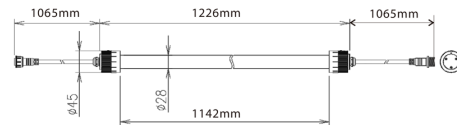

Photometric information available upon request.

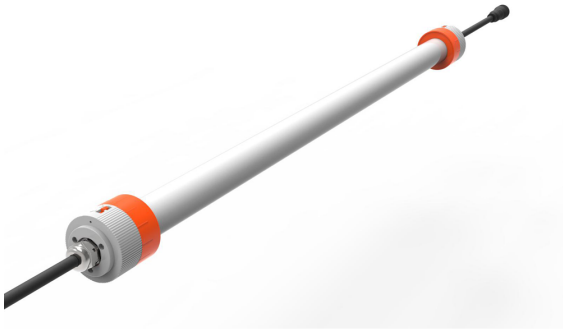

25W LED Tube 5K IP66 with 1M Connector end

VLFT-730-F-50



VIBE Lighting's 25W, 5K LED Poultry Farm System provides the ultimate lighting solution for increased egg output, lower mortality, longer peak production period and improved animal welfare. The intelligent system produces no UV or IR light radiation, is humidity proof, shatterproof & waterproof. Easy to install, (ceiling or suspended installation) the tubes can be connected in a series to accommodate various sized sheds with a host of accessories to suit. Contact your Sales Representative for a tailored quote.

Features & Benefits

- Precise dimming without flicker
- Ammonia & Acid resistant (perfect for poultry industry)
- 360° adjustable (rotatable end caps)
- No UV or IR light emitted
- Excellent thermal efficiency
- IP66 (waterproof, dustproof, shatterproof & humidity proof)
- IK08 (impact rating)
- 50,000 hours lifespan
- 3 years warranty




25W LED Tube 5K IP66 with 1M Conn ea end


VBLFT-730-F-50

Specifications

SKU	VBLFT-730-F-50
Luminaire efficacy	125 lm/W
EAN	9340994019048
Light Colour	Natural White
Wattage	25 W
Lumen output	3125 lm
IP rating	66
IK Rating	8
CRI	80
Beam Angle	120 Degrees
Trim colour	White
Base Type	T8
Diameter	28 mm
Length	1226 mm
Lifespan	50000 Hours
Warranty	3 Years
Dimmable	Dimmable
Shatterproof	Shatterproof
Mounting type	Ceiling / Suspended
LED source	SMD
Lamp Type	LED
Input voltage	240 Volt AC 50HZ
Diffuser	Frosted
Wiring method	Flex & Plug
Weatherproof	Weatherproof
Working temperature	-20°C ~ 40°C
Box Qty	25
Kelvin	5000K

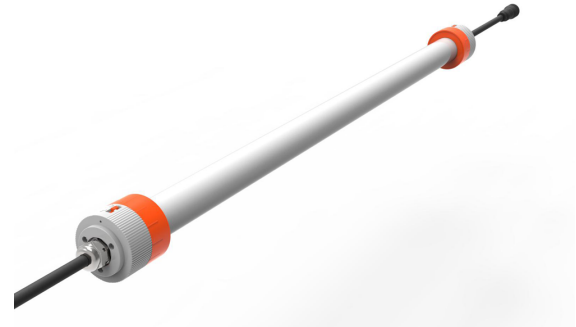

Dimensional Drawings

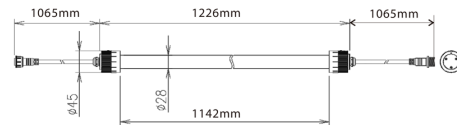

Photometric information available upon request.