



NM Series


VB-NM-25W-4-5K



Our 25W LED Solar Street Lights are a great option when lighting streets, pathways and carparks. At 25W, and 120° beam angle, they emit 4950 lumens per fitting. IP65 allows excellent weather proofing and IK08 impact rating. The lights include a 50,000 hour lifespan and a 3 year warranty. Please note: All VIBE LED Bollards are recommended to be mounted securely to a plinth/concrete base and not covered by any organic materials (dirt/mulch/sand ect) to avoid condensation entering and subsequently corroding the fitting. Not following this installation recommendation will void any stated warranty.

Features & Benefits

- Compact, modern and vandal proof design
- Utilises human body infrared induction control technology-when no infrared motion is detected, light dims down to 30%
- Comes standard with Anti Bird Spikes
- Very high light output - over 200 LM/W
- Operating Time: 10 hours (full power) - 30 hours (power saving)
- Charging Time: 6-7 hours (under direct sunlight)
- Capable of performing even after several overcast days
- Suitable for Pole Mounting (60mm Pole diameter)
- Easy Battery replacement (7yrs approx)
- IP65 & IK08 rated
- 50,000 hour lifespan
- 3 Year Warranty

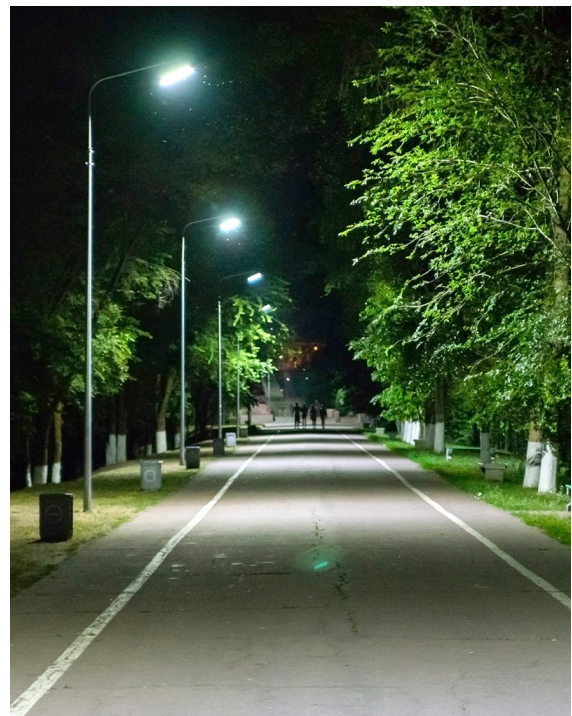

*Higher wattage versions (up to 60W) available upon request
(Minimum Order Quantity + lead times will apply).

*Recommended installation height: 5-6m

*Recommended installation space: 22-27m


*Recommended pole spigot size: 60mm diameter

Specifications

SKU	VB-NM-25W-4-5K
Luminaire efficacy	198 lm/W
EAN	9340994023526
Weight	16
Light Colour	Natural White
Wattage	25 W
Lumen output	4950 lm
IP rating	65
IK Rating	8
CRI	70
Beam Angle	120 Degrees
Trim colour	Black
Length	1002 mm
Width	440 mm
Height	210 mm
Lifespan	50000 Hours
Warranty	3 Years
Mounting type	Surface
Accessories	Wall mount bracket, round pole bracket, square pole bracket
Lamp Type	LED / Solar
Weatherproof	Weatherproof
Working temperature	-20C ~ 45C
Kelvin	5000K



Dimensional Drawings

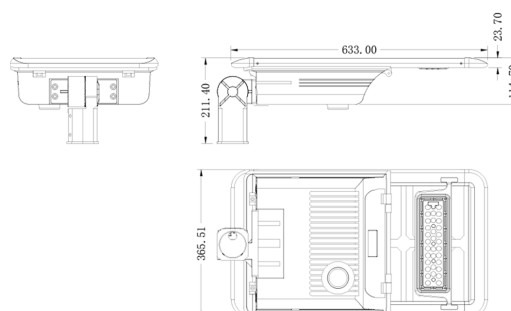

Photometric information available upon request.