

POLE CHAINSAW / CULTIVATOR

4-STROKE POWER

CORDLESS POWER

8' to 13'
25.4cc
10" High Reach
Pole Chainsaw
EY2650H25H

Multi-Position Engine Lubrication System

MM4
MAKITA MINI 4-STROKE ENGINE

2
YEAR
WARRANTY

10" Cutting Length

Specialized saw for limbing & pruning in high reach areas

- Telescoping shaft easily adjusts from 8 ft. to 13 ft. allowing access to hard-to-reach branches
- Weighs only 16.0 lbs. with reduced cutting head weight for improved balance and reduced operator fatigue
- Heavy duty dual-stage air filter with large sealing areas is easily accessible

SPECIFICATIONS	EY2650H25H
Displacement	25.4cc
Chain Pitch / Gauge	3/8" / .050"
Maximum Engine Power	0.77 Kw / 1.1 HP
Maximum Engine Speed	10,000 RPM
Cutting Length	10" (25.5 cm)
Fuel Tank Capacity	600 ml
Oil Tank Capacity	120 ml
Overall Length	154-1/2" (272 cm)
Net Weight	16 lbs (7.2 kg)



4-Stroke Engine Maintenance Kit
for Hedge Trimmers, Split Shaft Engine Unit & Pole Chainsaw



18Vx2
Cultivator
HKU01ZX2

13-3/4" Cultivating Width

X2
18V + 18V = 36V

Highly efficient lightweight design!



Includes battery converter (BCV02). Batteries & charger sold separately.

- Zero Emissions and Low Noise Level ideal for use in sensitive work environments, including residential areas and more
- Adjustable 3-Stage Handle enables positioning at optimal angle of operation or for more compact storage when not in use
- Battery Capacity Warning Light indicates approximate remaining battery power for each battery
- Transport Wheels enable easy movement around the work site and can be folded upright when not in use
- Carrying Handles enable easier loading or unloading from vehicle or trailer
- 2-Step Switch / Handle Lever Starting System and Child Lock Key prevents accidental start up for maximum safety

SPECIFICATIONS	HKU01ZX2
Battery Capacities	36V Li-Ion or two 18V Li-Ion
No Load Speed	Tine Axle Speed: 85 RPM Motor Speed: 4,100 RPM
Cultivating Width	13-3/4" / 8-7/8" (35 / 22.5 cm)
Tine Diameter	9-5/8" (24.5 cm)
Transmission Speeds	1-Forward
Overall Length	47" (119.3 cm)
Net Weight	48.5 lbs (22.2 kg)

CORDLESS POWER

- **Dual Blade** action cuts quickly with shearing effect
- **Battery Warning Light** indicates low battery capacity
- **Compact Design** for added versatility
- **Tool-less Blade Changing System** for easy blade changes
- **Left and Right Hand Lock Off Button** for operator safety

6-5/16"
Cutting Width



18V
LITHIUM-ION
18V Grass Shear
DUM604Z

Tool only. Battery & charger sold separately.

DUM604Z:
with **Grass Catcher**



12V
LITHIUM-ION
CXT

12V Grass Shears
UM600DZ / MU01Z

Tool only. Battery & charger sold separately.

UM600DZ:
12V MAX CXT Slide

MU01Z:
12V MAX (1.3 Ah) Pod

Grass Catcher enables quick and easy depth adjustment



Optional Hedge Trimmer Attachment
for DUM604Z, UM600DZ & MU01Z

Shear Blade Assembly 198409-9 / Chip Receiver Set 198402-3
Blade Cover 195274-7



Grass Shear Extension Handle
195187-2

For use with 18V or 12V Grass Shears!

ACCESSORIES

SPECIFICATIONS	DUM604Z	MU01Z
Battery Capacities	18V Li-Ion	12V Li-Ion
Strokes Per Minute	2,500 SPM	1,250 SPM
Cutting Width	6-5/16" (16 cm)	
Depth Adjustment	5/8" / 13/16" / 1-5" (1.5 cm / 2 cm / 2.5 cm)	3/8" / 9/16" / 1" (1 cm / 1.5 cm / 2.5 cm)
Overall Length	13-7/8" (35.3 cm)	11-1/2" (29.2 cm)
Net Weight	2.5 lbs (1.1 kg)	2.0 lbs (0.9 kg)

RECIPROCATING SAWS

CORDLESS POWER

With Sky Hook



18V x2 Reciprocating Saw DJR360Z

Tool only. Battery & charger sold separately.

- Accepts two x 18V Li-Ion batteries without a battery converter for use with existing 18V Li-Ion battery platform
- Retractable Sky Hook allows tool to be hung on rafters, pipes or scaffolding
- 2 speed settings provides ideal settings for wood or metal cutting applications

With Sky Hook



18V Reciprocating Saw DJR187Z

Tool only. Battery & charger sold separately.

- 2 speed settings provides ideal settings for wood or metal cutting applications
- Newly designed vertical crank mechanism minimizes blade deflection and reduces vibration
- Retractable Sky Hook allows tool to be hung on rafters, pipes or scaffolding

Ultra-compact and lightweight design for maximum versatility and maneuverability



18V Reciprocating Pruning Saw DJR183Z

Tool only. Battery & charger sold separately.

- Multi-position switch (tool handle & tool body) with lock-off levers for easier operation, maximum versatility and operator safety
- Battery protection system provides over-discharge, temperature and circuit protection for enhanced performance, battery cycle life and overall battery life
- One-handed, fast tool-less blade changes
- LED joblight with afterglow feature

ACCESSORIES



Ideal for **Green Wood**



Ideal for **Concrete, Concrete Block & Brick**



Ideal for **Bone, Horn, Frozen Foods, Ice & Pruning**

See page 33 for more details

SPECIFICATIONS	DJR360Z	DJR187Z	DJR183Z
Battery Capacities	Two 18V Li-Ion	18V Li-Ion	
Maximum Cutting Capacities	Pipe: 5-1/8" (13 cm) Wood (11-3/4" Blade): 10" (25.5 cm)		Pipe: 2" (5 cm) Wood (12" Blade): 2" (5 cm)
Strokes Per Minute	High: 0 - 3,000 SPM Low: 0 - 2,300 SPM		0 - 3,000 SPM
Length of Stroke	1-1/4" (3.2 cm)		1/2" (1.3 cm)
Overall Length	17-3/4" (44.9 cm)		15-5/8" (39.8 cm)
Net Weight	6.2 lbs (2.8 kg)	6.9 lbs (3.1 kg)	2.7 lbs (1.2 kg)

LOG HOME BUILDING TOOLS

ELECTRIC POWER



12-1/4" Planer
KP312



2-Blade cutter head makes 24,000 cuts per minute

- Unrivaled for power, size and performance
- Larger and sturdy sole plate for added stability
- Front roller for easy moving over rough materials
- Guide rule for accurate and maximum use of planing width
- Poly "V" belt designed with grooves efficiently transfers power from the motor to the blades
- Large ejection chute provides high rate of chip discharge



6-3/4" Planer
1806B



30,000 cuts per minute

- Unrivaled for power, size and performance
- Large Base Plate for maximum stability
- Machined Aluminum Base for planing accuracy
- Depth Adjustment Knob for precision planing applications
- Lock-On Button enables easy continuous operation



Includes:
Wooden Carrying Case



4-3/8" Planer
1002BA



For even stock removal over dips & rises in wood

- Large Planing Width engineered for an Even Cut
- Precision machined base for notching out logs at a 12-5/8" curved radius
- Planes 4-3/8" width and 3/16" deep in a single pass
- Large ejection chute for high rate of chip discharge
- Conveniently located front and rear grips for operator control
- Lock-On Button enables easy continuous operation
- Smoothes and notches out logs for a perfect fit
- Large conveniently located depth settings knob for easy adjustments

Planer Blades




Blade Gauge Assembly

Bevel Guide



Sharpening Holder Assembly



Dressing Stone



ACCESSORIES

See page 32 for more details

SPECIFICATIONS	KP312	1806B	1002BA
Maximum Capacities	Planing Width: 12-1/4" (31 cm) Planing Depth: 1/8" (.35 cm)	Planing Width: 6-3/4" (17 cm) Planing Depth: 1/16" (.2 cm)	Planing Width: 4-3/8" (11 cm) Planing Depth: 5/32" (.4 cm) Curve Radial Cuts: 11-3/16" (30 cm) Curved Radius: 12-19/32" (32 cm)
No Load Speed	12,000 RPM	15,000 RPM	
AMPS (120V)	15.0 A	10.9 A	9.6 A
Overall Length	21-3/4" (55 cm)	20-3/4" (53 cm)	13-5/16" (34 cm)
Net Weight	40.6 lbs (18.4 kg)	40.6 lbs (18.4 kg)	11.5 lbs (5.2 kg)

LOG HOME BUILDING TOOLS

ELECTRIC POWER



4-3/4" Wheel Sander
9741

Unique design - fast, easy and controlled operation

- Fast and efficient paint and rust removal
- Well balanced design with a low center of gravity and large front loop handle for easy handling



Electric brake

16-5/16" Circular Saw
5402NA

Large capacity for beam and timber cutting

- Powerful Motor delivers 1,800 max watts out
- Rugged Steel Base for for maximum stability
- Electric Brake for increased operator safety
- Blade Stabilizer for stable blade rotation and superior cutting performance
- Large Depth Control Lever for convenience and secure adjustments



SUPER JOINT SYSTEM™
SJS


10-1/4" Circular Saw
5104

"SJS" Technology, Electric brake

- "SJS" Technology prevents kickback if blade jams, protecting the operator and the tool
- Electric Brake for increased operator safety
- Lock-Off Button prevents accidental start-up for operator safety
- Diecast Aluminum Base for maximum operational stability
- Compact Blade Case and reduced overall tool height for enhanced operational versatility

ABRASIVE WHEELS

100G Nylon Wire Brush
Medium Sanding



40G Slit Paper Wheel
Sanding



See page 32 for more details

SPECIFICATIONS	9741
Wheel Size	3-15/16" x 4-23/32" (10 cm x 12 cm)
No Load Speed	3,500 RPM
AMPS (120V)	7.8 A
Overall Length	12-1/4" (31 cm)
Net Weight	9.3 lbs (4.2 kg)

SPECIFICATIONS	5402NA	5104
Blade Diameter	16-5/16" (41 cm)	10-1/4" (26 cm)
Arbor	1" (2.5 cm)	5/8" (1.5 cm)
Maximum Cutting Capacities	0°: 6-1/4" (15.8 cm) 45°: 4-3/16" (10.6 cm)	0°: 3-3/4" (9.5 cm) 45°: 2-3/4" (6.9 cm)
No Load Speed	2,300 RPM	3,800 RPM
AMPS (120V)	15.0 A	
Overall Length	24-1/4" (61.6 cm)	16" (40.5 cm)
Net Weight	32.2 lbs (14.6 kg)	20.3 lbs (9.2 kg)

ELECTRIC POWER

CORDLESS POWER



3,200 RPM

Chain Mortiser
7104L



Perfect for timber framing and log home building

- Cuts lap joints up to 5-1/8"
- Notches or cuts holes in thick wood stock quickly, cleanly and accurately
- Quick horizontal chain lever for widening holes
- Base mounts onto a max. 12" beam
- Large adjustable vise for attaching firmly onto logs

SPECIFICATIONS	DLM431Z
Capacities	Max Hole Width (Longitudinal): 5-1/8" (13 cm) Max Hole Width (Transverse): 1-1/4" (3.1 cm) Max Hole Depth: 6-1/8" (15 cm)
No Load Speed	3,200 RPM
AMPS (120V)	10.5 A
Overall Length	20-1/8" (51 cm)
Net Weight	38.1 lbs (17.3 kg)

1/4" Impact Driver
DTD170Z

Tool only. Battery & charger sold separately.

BRUSHLESS



Features NEW 'Cam-Out' elimination mode and ULTRA-COMPACT DESIGN

- eXtreme Protection Technology (XPT) offers maximum protection against dust, debris and liquids for optimal performance in extreme conditions
- 4 stage impact power selection + TEK and 'Cam-Out' modes to ensure precise fastening and prevent damage to fasteners
- 'Cam-out' elimination mode operates at low speed until fastening begins to eliminate 'cam-out' and cross-threading
- TEK mode reduces impact power during final stages of fastener seating
- LED charge level indicator displays approximate remaining battery power

ACCESSORIES



Threaded Rod Sockets

Hollow Sockets

See page 32 for more details

SPECIFICATIONS	DTD170Z
Battery Capacities	18V Li-Ion
Hex Shank	0 - 3,600 / 3,200 / 2,100 / 1,100 RPM
Impacts Per Minute	0 - 3,800 / 3,600 / 2,600 / 1,100 IPM
Maximum Fastening Torque	1,550 in. lbs (175 Nm)
Overall Length	4-5/8" (11.7 cm)
Net Weight	2.0 lbs (0.9 kg)

GENERATORS

4-STROKE POWER

Electric start



8.2 Hours
of continuous operation

12,000W
653cc Generator
G12000R
Starting battery not included



6.6 Hours
of continuous operation

7,100W
404cc Generator
EG711A



GENERATOR FEATURES & BENEFITS	G12000R FEATURES IDLE MODE	EG711A
Receptacles	Duplex 120V (20 AMP), Locking 120V (20 AMP) Locking 120V (30 AMP), Locking 120V / 240V (30 AMP)	
Generator	Full copper windings, AC & DC circuit breakers, Automatic Voltage Regulator	
Engine	EX series Subaru-Robin™ 4-cycle engine	

Why professionals prefer Makita generators powered by EX series Subaru-Robin™ 4-cycle engines

- Case-hardened steel timing chain allows for precision timing and maximum durability
- Heavy-duty piston rings and a cast-iron cylinder liner resist wear and ensure a long engine life
- Hardened steel rocker arms with precision tappet adjusters are used for greater durability and reduce service requirements
- Dual ball bearing crankshaft offers maximum durability under load
- Chain-driven overhead cam design offers superior power and performance with an automatic decompression system to reduce the required pulling force by 30% to 40%. EX engines start easily – even in cold Canadian winters.
- Cooling fins cast into the interior and exterior of the block maximize surface area for superior engine cooling
- Electronic ignition, low oil shut-off and automatic idle / full power throttle control

SPECIFICATIONS	G12000R	EG711A
Maximum Output Current	12,000W (100 / 50 AMP)	7,100W (59.2 / 29.6 AMP)
Rated Output Current	9,500W / 79.2 / 39.6 A	5,000W / 41.6 / 20.8 A
AC Voltage	60 Hz (120V / 240V)	
DC Voltage	12 VDC (8.3 AMP)	
Displacement	653cc	404cc
Maximum Power	22 HP @ 3,600 RPM	12.5 HP @ 4,000 RPM
Fuel Tank Capacity	44 L	22 L
Noise Level	77 dB	75.5 dB
Overall Length	32.5" (82.6 cm)	28-1/2" (72.5 cm)
Dry Weight	310.0 lbs (141 kg)	189.6 lbs (86 kg)

GENERATORS

Approximate Wattage Requirements	Generator Selection Chart	
Starting / Running	G12000R	EG711A
CENTRAL AIR 32,000 BTU 11,500 / 5,500 24,000 BTU 8,800 / 3,800 ELECTRIC WELDER 200 AMP A/C 9,000 / 9,000		
CLOTHES DRYER 7,100 / 5,750 AIR COMPRESSOR 3 HP 6,800 / 3,000 2.5 HP 5,900 / 2,500		
AIR COMPRESSOR 2 HP 5,100 / 2,000 CIRCULAR SAW 3,700 / 1,400 SUMP PUMP 1/2 HP 3,200 / 1,050 WELL PUMP 1/2 HP 3,100 / 1,000		
FURNACE FAN 1/2 HP 3,000 / 875 WASHING MACHINE 3,000 / 750 REFRIGERATOR 2,900 / 700		
COFFEE MAKER 1,750 / 1,750		
MICROWAVE 750W 1,550 / 750 DRILL 1,500 / 600 BATTERY CHARGER 15 AMP 1,200 / 500 CHAINSAW 2 HP 1,100 / 1,100 COMPUTER 700 / 700 TELEVISION 300 / 300	12,000W	7,100W
		

This chart is for reference only. The wattage requirements for your appliance, motor, or tool may require more or less wattage than is listed in this chart. Please refer to your owners manual to verify whether or not your generator is appropriate for the equipment you wish to run. You may also contact your local Makita Factory Service Centre for additional information if you plan on purchasing a new generator.

Note: All wattage requirements are approximate. Values are subject to change without notice

8.2 Hours
 of continuous operation
653cc
Generator
 G12000R
 Starting battery not included

6.6 Hours
 of continuous operation
404cc
Generator
 EG711A

TRASH & WATER PUMPS

4-STROKE POWER

- EW320TR & EW3050H Powered by **EX Series Subaru-Robin™ 4-cycle Engines**
- Meets **EPA / CARB** emission standards
- **Self Priming Centrifugal Pump** for easy operation



2.3 Hours
of continuous operation

92' Total Head*

3" Suction / Discharge Diameter

**90HP
Trash Pump
EW320TR**



0.9 Hours
of continuous operation

135' Total Head*

1" Suction / Discharge Diameter

**1.0HP Centrifugal
Water Pump
EW1050H**

* Total head: Total height at sea level, to which water can be raised above original water level.

STRAINERS

Available for 1", 2" and 3" diameter suction hoses



PVC SUCTION HOSES

NON-COLLAPSIBLE

Available for 1", 2" and 3" diameter trash and water pumps

ACCESSORIES

PVC DISCHARGE HOSES

Available for 1", 2" and 3" diameter trash and water pumps









SPECIFICATIONS	EW320TR	EW1050H
Suction Head	26' (8.0 m)	29' (8.7 m)
Maximum Pumping Capacity: Litres Per Minute	1,300 LPM	110 LPM
Fuel Mix	No Fuel Mixing	
4-Stroke Oil	10W-30	
Fuel Tank Capacity	6.1 L	500 ml
Overall Length	26.5" (67.2 cm)	12-1/2" (31.9 cm)
Dry Weight	106.9 lbs (48.5 kg)	12.8 lbs (5.8 kg)

TRASH & WATER PUMPS

4-STROKE POWER

WATER & TRASH PUMP ACCESSORIES

Water & Trash Pump Accessories				
	Description	Size	For Model(s)	Part No.
	PVC Suction Hoses (Non-Collapsible)	1" x 20'	EW120R / EW1050H	123048-A
		2" x 20' (Includes Male / Female Fittings)	EW220R / EW2050H	123042-A
		3" x 20' (Includes Male / Female Fittings)	EW320R / EW320TR EW3050H	123043-A
	PVC Discharge Hoses	1" x 25'	EW120R / EW1050H	123049-A
		1" x 50'		128049-A
		2" x 50' (Includes Male / Female Fittings)	EW220R / EW2050H	123045-A
		3" x 50' (Includes Male / Female Fittings)	EW320R / EW320TR EW3050H	123046-A
	Replacement Gaskets for Female Fittings	2"	EW220R / EW2050H	421002-A
		3"	EW320R / EW320TR EW3050H	421003-A
	Strainer	1"	EW120R	480-02550-29
			EW1050H	ME01689268
		2"	EW220R / EW2050H	480-05050-29
		3"	EW320R / EW320TR	480-08310-33
	Tool Kit	-	EW120R	5929002000
			EW220R / EW2050H EW320R / EW320TR	277-90301-H0
	Spanner Wrench	2" Hose	EW220R / EW2050H	781001-A
		3" Hose	EW320R / EW320TR EW3050H	781002-A





MM4
MAKITA MINI 4-STROKE ENGINE

POWER CUTTER ACCESSORIES

14" 3D PREMIUM Diamond Blade
T-02836

PREMIUM PROFESSIONAL PERFORMANCE

- Features 3D Diamond Grid Technology incorporating even placement of diamond content throughout the segment
- 3D pattern releases worn diamond and exposes sharp diamond at a consistent rate
- Offers premium professional performance versus traditional diamond blades
- Keyhole expansion slots promotes blade cooling
- Laser welded segments ensure the strongest possible joint
- Segmented style rim
- Ideal for concrete, asphalt, brick and block

14" Metal Cutting Blade for Power Cutters
A-96229

FASTEST CUTTING MORE CUTS




- Offers up to 100x the life of abrasive wheels
- Ideal for cutting angle iron, rebar, deck plating, steel studs, pipe and more!
- Premium diamond content for long life and fast cutting
- Expertly balanced premium steel core for reduced vibration and noise
- Vacuum brazed diamond segments for optimum operational life and consistent performance
- Eliminates performance issues of abrasive wheels, including disc shrinkage, glazing and shattering
- Segmented Rim style reduces heat buildup and maximizes material removal

Optimum Diamond Blades

Optimum Bond Matrix provides the optimal balance between wear, fracture and exposure in order to maximize the cutting ability of the diamond content

Segmented Rim



General purpose quick cutting blade for concrete, tile, brick & stone

Turbo Rim



Fast and clean cutting blade for all applications

OPTIMUM™ Diamond Blades								
Blade Diameter	Arbor	Rim Type	Wet / Dry	Material Type	Application	Max. RPM	For Model(s)	Part No.
16"	1" / 20 mm	Segmented Rim	Wet or Dry	Medium	Cured Concrete, Block, Brick, Masonry	4,800 RPM	EK8100	A-94742
				Soft	Asphalt, Green Concrete, Sand Stone			A-94661
14"	1" / 20 mm	Turbo Rim	Wet or Dry	Hard	Granite, Ceramic, Stone	5,400 RPM	4114 EK6101 EK7301 / HD EK7651H / HD	A-94627
		Segmented Rim		Medium	Cured Concrete, Block, Brick, Masonry			A-94736
				Medium & Soft (Dual Purpose)	Concrete & Asphalt			T-01270
				Soft	Asphalt, Unset Concrete, Sandstone			A-94655
12"	1" / 20 mm	Segmented Rim	Wet or Dry	Medium	Cured Concrete, Block, Brick, Masonry	6,300 RPM	4112H DPC6430	A-94720
				Medium & Soft (Dual Purpose)	Concrete & Asphalt			T-01264



POWER CUTTER ACCESSORIES

Vacuum Brazed Diamond Rescue Wheels

- Developed specifically for rescue operations, including cutting through airplanes, trains and crash barriers
- Ideal for use with Makita 12" and 14" Angle & Power Cutters!

Blade Diameter	Arbor	Rim Type	Wet / Dry	Application	Max. RPM	For Model(s)	Part No.
12"	1"	Segmented Rim	Dry	Steel, stainless steel, alloys, aluminum, resin, PVC, concrete, reinforced glass, fibre-reinforced plastics	6,400	4112H	B-56998
14"					5,400	4114 EK7651H EK7301 EK6101	B-57009

10L Power Cutter Pressurized Water Tank 988 394 610

Enables Dust Free Operation When Direct / Main Water Sources Are Not Available

Power Cutters Filters & Accessories

Filter Type	DPC6430	EK6101	EK7301 EK7301HD	EK7651H EK7651HD	EK8100
Foam Filter	395 173 081	N/A	395 173 081	195945-6	395 173 081
Paper Filter	395 173 011	315 173 010	395 173 011	442165-6	395 173 011
Nylon Filter	395 173 021	315 173 020	395 173 021	424399-3	395 173 021
Filter Sets (5 Pcs)	957 173 160	N/A	957 173 611	N/A	957 173 611

Power Cutter Guide Trolley

Power Cutter Shown Sold Separately

Part No.	Description	Includes	For Models
394 369 600	<ul style="list-style-type: none"> • Heavy Duty Tubular Aluminum Construction • Ideal for maintaining precise cutting position and depth during operation 	<ul style="list-style-type: none"> • Water Tank • Water System • Depth Limiter 	DPC6430 EK7301 / HD EK8100
394 369 610			EK7651H / HD

Angled Fuel Filter

395 114 300	Description	For Models
	Installs quickly and easily to enable fuel re-filling while the power cutter is in the upright position or fitted to a guide trolley	DPC6430 EK7301 / HD EK8100

Power Cutter Service Set

957 394 004	Description	For Models
	<ul style="list-style-type: none"> • Drive Belt, • Fuel Cap (2 ea.) • Starter Cord (2 ea.) • Combination Wrench • Spark Plug • Fuel Filter 	DPC6430 EK7301 / HD EK8100

Power Cutter Filter Oil & Cleaner

Part No.	Description	For Models
980 008 627	Power Cutter Filter Cleaner (0.5 L)	DPC6430 EK6101 EK7301 / HD EK7651H / HD EK8100
980 008 628	Power Cutter Filter Oil (1.0 L)	
980 008 629	Power Cutter Filter Cleaner & Oil Set	

Abrasive Wheels

Wheel Diameter	Arbor	Thickness	Wet / Dry	Application	Max RPM	For Model(s)	Part No.	
16"	20 mm	3/16"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	4,250 RPM	EK8100	966 161 020	
			Dry	Steel & Ferrous Metals			966 161 050	
14"	1"	5/32"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	5,500 RPM	4114 EK7301HD EK7651HD	966 144 120	
			Dry	Steel & Ferrous Metals			966 144 152	
	20 mm	5/32"	Wet / Dry	Concrete, Stone, Masonry & Asphalt			EK6101 EK7301 EK7651H	966 141 120
		3/16"	Dry	Steel & Ferrous Metals			966 141 150	
12"	20 mm	1/8"	Wet / Dry	Concrete, Stone, Masonry & Asphalt	5,400 RPM	DPC6430	966 121 120	
			Dry	Steel & Ferrous Metals	6,400 RPM		966 121 150	

LOG HOME BUILDING TOOLS ACCESSORIES

Planer Blades



Style	Description	For Models	2 / Pk Part No.
4-3/8"	High Speed Steel - Single Edge	1002BA 1911B	793008-8
	Carbide - Single Edge		D-17245
6-3/4"	High Speed Steel - Single Edge	1806B	D-63666
12"	High Speed Steel - Double Edge Reversible	2012NB	793346-8

Visit makita.ca for our full line of **PLANER BLADES & ACCESSORIES**

Wheel Sander Abrasive Wheels

Description	Grit	Application	For Model	Part No.
 Slit Paper Wheel	40G	Sanding	9741	794380-1
 Wire Brush Wheel	-	Metal Finishing		794382-7
 Cotton Buff Wheel	-	Polishing		794381-9
 Nylon Brush Wheel	40G	Coarse Sanding		794384-3
	100G	Medium Sanding		794379-6
	200G	Fine Sanding		794383-5

Hollow Sockets



Enables fast and effortless installation of 3/8" and 1/2" threaded rod


- Available for 3/8" (B-51611) and 1/2" (B-51627) threaded rod
 - 1/4" hex shank
- Use with Makita Drills / Drivers, Hammer Drills / Drivers **(DO NOT OPERATE IN HAMMER MODE)** or Impact Drivers

Hollow Sockets



Socket Size	Threaded Rod / Bolt Size	Length	Application	Shank	Part No.	
7/16"	1/4"	3"	Nuts	1/4" Hex	B-50784	
		6"	Bolts		B-50790	
		12"	Threaded Rod		B-50809	
					18"	B-50815
					24"	B-50821
9/16"	3/8"	3"	Nuts		B-43290	
		6"	Bolts		B-43309	
		12"	Threaded Rod		B-43315	
					18"	B-43321
					24"	B-43337
3/4"	1/2"	3"	Nuts	B-43343		
		6"	Bolts	B-43359		
		12"	Threaded Rod	B-43365		
				18"	B-43371	
				24"	B-43387	
15/16"	5/8"	3"	Nuts	B-50837		
		6"	Bolts	B-50843		
		12"	Threaded Rod	B-50859		
				18"	B-50865	
				24"	B-50871	

Circular Saw Blades

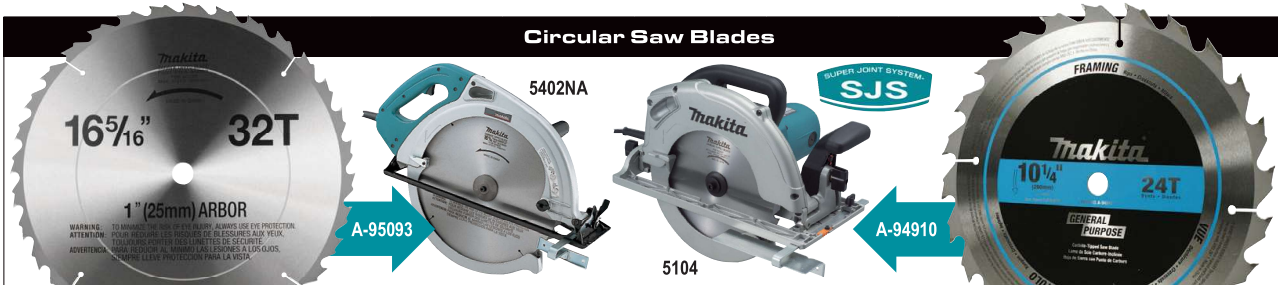

Blade Diameter	Arbor	# of Teeth	Grind Angle	Hook Angle	Kerf	Max. RPM	Material	For Model(s)	Part No.
16-5/16"	1"	32 CT	ATB	20°	.091"	3,680	Wood	5402NA	A-95093
		60 CT	FTG	20°	.102"	4,300			792118-8
10-1/4"	5/8"	24 CT	-	-	-	5,870		5104 HS0600	A-94910

RECIPROCATING SAW / HEDGE TRIMMER ACCESSORIES

Reciprocating Saw Blades								
Length	TPI	Width	Thickness	Material	Blade Type	Recommended Use	Part No.	Pk
Masonry								
8"	Tungsten Carbide Grit	3/4"	.040"	-	Straight Back	Brick, Tile, Marble, Stone, Chalkboard, Cast Iron, Melamine, Veneer & Fibreglass	723077-A-2	2 / Pk
9-1/2"	2 Carbide Teeth	1"	.0625"	-	Straight Back	Aerated Concrete, Concrete Block & Brick, Low Aggregate Concrete & Masonry, Abrasive Materials	B-12809	1 / Pk
12"	2 Carbide Teeth	2"	.0625"	-	Straight Back	Aerated Concrete, Concrete Block & Brick, Low Aggregate Concrete & Masonry, Abrasive Materials	B-10394	1 / Pk
Wood Cutting								
8"	Progressive	3/4"	.050"	High Carbon Steel	Taper Back	Fast, Clean Cutting in Wood from 1/4" - 4"	723078-A-5	5 / Pk
9"	3	3/4"	.050"	High Carbon Steel	Taper Back	Very Fast, Aggressive Cutting in Green Wood from 5/8" - 6"	723053-A-5	5 / Pk
9"	6	3/4"	.050"	High Carbon Steel	Taper Back	Very Fast, Aggressive Cutting in Green Wood from 5/8" - 6"	723052-A-5	5 / Pk
Specialty								
6"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	B-52043	1 / Pk
9"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	B-30564	1 / Pk
9"	10	3/4"	.050"	Stainless Steel	Straight Back	Meat, Frozen Foods, Ice	B-30570	1 / Pk
12"	6	3/4"	.050"	Stainless Steel	Straight Back	Bone, Horn, Frozen Foods, Ice, Pruning	B-23248	1 / Pk
12"	10	3/4"	.050"	Stainless Steel	Straight Back	Meat, Frozen Foods, Ice	B-23254	1 / Pk
7"	8.5	3/4"	.024"	High Carbon Steel	Straight Back	Green Wood, Pruning	B-56580	1 / Pk
7"	15	3/4"	.024"	High Carbon Steel	Straight Back	Green Wood, Pruning, Bamboo, PVC	B-56596	1 / Pk
9"	8.5	3/4"	.035"	Bi-Metal	Straight Back	Green Wood, Pruning	B-57386	1 / Pk
9"	15	3/4"	.035"	Bi-Metal	Straight Back	Green Wood, Pruning, Bamboo, PVC	B-57392	1 / Pk
10"	8.5	3/4"	.039"	High Carbon Steel	Straight Back	Green Wood, Pruning	B-62016	1 / Pk



B-23248



723053-A-5

Hedge Trimmer Accessories			
	Blade Cover Part No.	Chip Receiver Part No.	For Models
	195274-7	198402-3	UH201DZ
	450490-1	194681-1	DUH651Z, UH5570, UH6570
	451868-1	451866-5	EN7350SH
	452327-8	-	EH6000W
	452328-6	-	EN401MP, EN4950H
	453723-3	195050-9	DUH523Z
	454277-3	-	EH7500W
	454278-1	-	EN5950SH
	454279-9	-	EH5000W, EN410MP, EN4951SH
	457036-4	-	EN420MP

CHAINSAW ACCESSORIES

Chain Saw Bar and Chain Reference Chart



Models	Bar Length	Gauge	Pitch	Chain Part No.	Chain Type	Bar Mount	Drive Link	Bar Part No.	Cover Part No.	File Size
Cordless / Electric Chainsaws										
DUC122	4-1/2" / 11.5 cm	.050"	1/4"	791284-8	25AP	N/A	42	158476-6	416311-7	5/32"
DUC254	10" / 25 cm	.043"	3/8"	199075-5	90PX	A041	39	161846-0	452093-7	4.5 mm
DUC302	12" / 30 cm	.043"	3/8"	531 290 046	90PX	A041	46	165245-8	419288-5	4.5 mm
DUC355 DUC405 DUC353 DUC400	12" / 30 cm	.043"	3/8"	196740-7	90PX	A041	46	165245-8	419288-5	4.5 mm
	14" / 35 cm	.043"	3/8"	196741-5	90PX	A041	52	165246-6	419288-5	4.5 mm
	16" / 40 cm	.043"	3/8"	196742-3	90PX	A041	56	165247-4	419242-9	4.5 mm
UC3530A UC3551A	14" / 35 cm	.050"	3/8"	528 092 652	91PX	A041	52	165201-8	419288-5	5/32"
UC4030A UC4051A	16" / 40 cm	.050"	3/8"	531 492 656	91PX	A041	56	165202-6	419242-9	5/32"
Specialty Chainsaws										
EY2650H25H	10" / 25 cm	.050"	3/8"	196142-7	91PX	A218	39	165695-7	452093-7	5/32"
EY401MP	10" / 25 cm	.050"	3/8"	196142-7	91PX	A218	39	165695-7	452093-7	5/32"
Gas Powered Chainsaws										
EA3201 EA3501, EA3601	14" / 35 cm	.050"	3/8"	528 092 652	91PX	A041	52	165201-8	419288-5	5/32"
	16" / 40 cm	.050"	3/8"	531 492 656	91PX	A041	56	165202-6	419560-5	5/32"
EA4300	18" / 45 cm	.050"	.325"	512 484 672	95VP	K041	72	444 045 141	419560-5	3/16"
DCS5121 EA5000	18" / 45 cm	.058"	.325"	523 686 072 528 086 072	21LP	K095	72	443 045 661	952 020 640	3/16"
EA5600	18" / 45 cm	.058"	3/8"	523 099 064	73LP	K095	64	445 045 651	952 020 640	7/32"
EA6100	21" / 53 cm	.058"	3/8"	523 099 072	73LP	K095	72	443 053 651	952 020 650	7/32"
DCS6421 EA7300 EA7900	18" / 45 cm	.058"	3/8"	523 099 068	73LP	D009	68	445 045 655	952 020 640	7/32"
	20" / 50 cm	.058"	3/8"	523 099 072	73LP	D009	72	445 050 652 445 050 655	952 020 650	7/32"
	24" / 60 cm	.058"	3/8"	523 099 084	73LP	D009	84	445 060 652	952 020 660	7/32"
	28" / 70 cm	.058"	3/8"	523 099 092	73LP	D009	92	445 070 652	N/A	7/32"

Chainsaw Case

B-70777



Description

- Constructed from heavy duty ABS plastic
- Ideal for safe and secure storage and transportation of your Makita Chainsaw

For Models

EA3201SRDB
EA3501SRDB
EA3601FRDB
EA4300FREC
DCS5121REJ
EA5600FREE

6" File Handle 953 004 010



Chainsaw Files & File Sets

File Sets Includes File, Handle & Guide



Type	File Size	Part No.
Round	5/32"	953 030 010
	3/16"	953 030 030
	7/32"	953 009 000

File Sets Bulk 12 / Pk



Type	File Size	Part No.
Round	5/32"	953 003 090
	11/64"	953 003 100
	3/16"	953 003 070
	13/64"	SD 13/64"
	7/32"	953 003 040



**42.4cc Chainsaw
EA4300FREC**


CHAINSAW ACCESSORIES

**18" Rescue Cut Bar & Chain
For Chainsaw EA7300**



957 415 060


- Solid tungsten carbide teeth offer quick cutting ability in a variety of materials such as wood, shingles, metal (steel, aluminum, copper & alloys up to 3/64" thick), aerated concrete blocks, car bodies, railway cars and more!
- Features depth limiter for use when cutting blind ventilation holes
- Commonly used by rescue services, fire departments, contractors and more!
- Includes: chain bar, 18" rescue chain, depth limiter









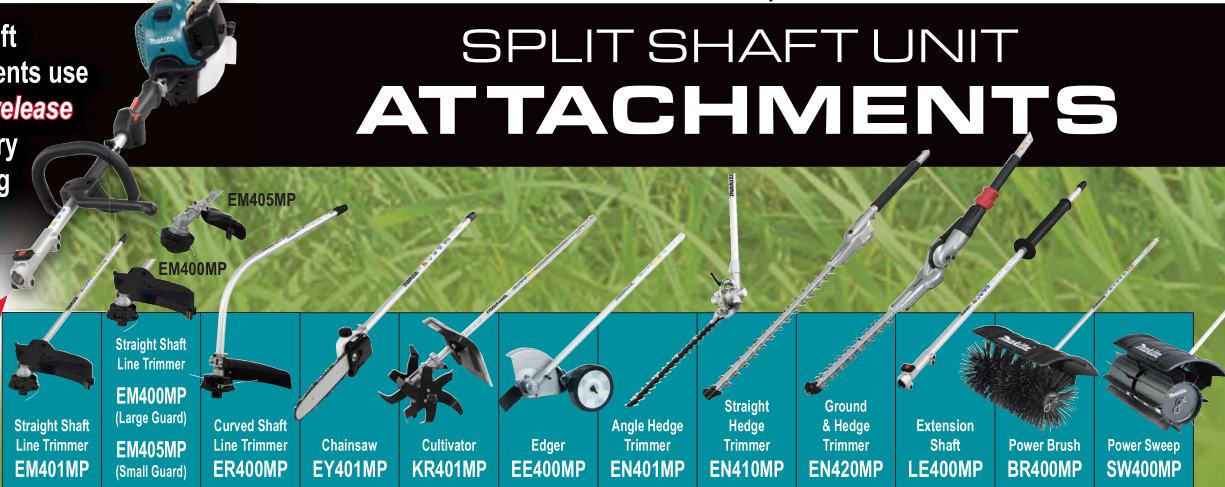



Oils & Lubricants			
	Qty.	Particulars	Item #
	48	50:1 Synthetic 2 Cycle Oil (3.8 L / 1 Gallon Mix)	T-00745C-48
		50:1 Synthetic 2 Cycle Oil (9.5 L / 2.5 Gallon Mix)	T-00739C-48
	6	50:1 - 2 Cycle Oil (200 ml / 6.8 fl. Oz)	181114-A6P
	48		181114-ACS
	4	Heavy (Summer) Chain Oil (4 x 1 Gallon)	181116-ACS2
		Light (Winter) Chain Oil (4 x 1 Gallon)	181120-ACS2

Safety Equipment						
T-01703	FACE SHIELD	T-01638	T-01622		MSP28-30	Size 28/30
 Safety Helmet Complete Head, hearing & face protection	 Forestry Face Screen	 Brush Guard Visor	 Chain Saw Safety Chaps One size fits all		T-01650	Size 32/34
					T-01666	Size 36/38
					T-01672	Size 40/42
					MSP44-46	Size 44/46





Split shaft attachments use a quick release accessory mounting system!

SPLIT SHAFT UNIT ATTACHMENTS




												
Split Shaft Attachment Features & Benefits	Straight shaft style preferred by professionals due to a longer reach <i>Includes Parts for Brush Cutter. Blade Sold Separately</i>	Straight shaft style preferred by professionals due to a longer reach	Curved shaft style preferred for lighter weight and compact size	Ideal for pruning branches in hard to reach areas	Ideal for cultivating small garden beds and between existing rows of vegetables or flowers	Quickly and easily cuts through turf to define edge of garden beds, sidewalks, driveways and more	Ideal for trimming hard to reach hedges. 135° cutting radius for maximum versatility of operation	Ideal for trimming hard to reach areas of hedges and bushes	Compact and lightweight design ideal for trimming hedges and shrubs. Short cutting length enables effective trimming of grasses, climbing plants and small scrub brush	Enables operator to achieve added reach when used with Pole Hedge Trimmer Attachment (EN400MP) or Pole Chain Saw Attachment (EY401MP)	The power bristle brush attachment is an effective tool for removing debris from cracks and crevices of hard surfaces	Power Sweep paddle attachment cleans up dirt along roads and sidewalks, moves pebbles and sand in turf, as well as water and light snow along flat surfaces
Split Shaft Attachment Compatibility	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH	EX2650LH	EX2650LH	EX2650LH	EX2650LH DUX60Z	EX2650LH DUX60Z	EX2650LH DUX60Z
Split Shaft Attachment Specifications	Cutting Width: 16-12" (420 mm) Spindle Size / Thread: M10, Left Handed Overall Length: 34-12" (876 mm) Net Weight: 2.2 lbs (1.0 kg)	Cutting Width: 16-12" (420 mm) Spindle Size / Thread: M10, Left Handed Overall Length: 34-12" (876 mm) Net Weight: 2.2 lbs (1.0 kg) EM400MP 2.2 lbs (1.0 kg) EM405MP 2.8 lbs (1.3 kg)	Cutting Width: 16-18" (410 mm) Spindle Size / Thread: M8, Right Handed Overall Length: 27-3/4" (703 mm) Net Weight: 1.2 lbs (0.5 kg)	Guide Bar Length: 10" (255 mm) Chain Gauge: 0.043" (1.09 mm) Overall Length: 46" (117 cm) Net Weight: 2.4 lbs (1.1 kg)	Outer Blade Diameter: 9-1/8" (232 mm) Cultivating Width: 6-6/16" (160 mm) Overall Length: 38" (965 mm) Net Weight: 6.5 lbs (2.9 kg)	Blade Diameter: 8" (203 mm) Overall Length: 35-1/2" (899 mm) Net Weight: 5.4 lbs (2.4 kg)	Cutting Width: 21" (535 mm) Cutting Radius: 135° (90° / 45°) Shaft Length: 59" (150 cm) Net Weight: 5.4 lbs (2.4 kg)	Cutting Length: 19-1/4" (490 mm) Shaft Length: 43-1/2" (110 cm) Net Weight: 4.5 lbs (2.0 kg)	Cutting Width: 9-7/8" (250 mm) Cutting Radius: 135° (90° / 45°) Shaft Length: 54-1/2" (138 cm) Net Weight: 5.5 lbs (2.5 kg)	Overall Length: 45" (114 cm) Net Weight: 2.5 lbs (1.13 kg)	Brush Diameter: 9-7/8" (250 mm) Brush Width: 23-5/8" (600 mm) Overall Length: 45" (114 cm) Net Weight: 13.9 lbs (6.3 kg)	Sweep Drum Diameter: 10-3/8" (265 mm) Sweep Drum Width: 23-1/4" (590 mm) Overall Length: 45" (114 cm) Net Weight: 15.8 lbs (7.2 kg)



BRUSH CUTTER / LINE TRIMMER ACCESSORIES

Brush Cutter & Clearing Blades						Model No.	EBH253U	EBH341U
Model	Description	Diameter	Arbor Size	Teeth				
	B-14118	4-Point Blades	9"	1"	4 T		•	
	385 224 140		10"	20 mm				
	B-14124		10"	1"				•
	195298-3	3-Point Blade	9"	1"	3 T		•	
	380 224 180	Eddy Blades	8"	20 mm	8 T			
	385 224 200		10"					
	B-14168	Saw Blade	10"	1"	80 T		•	

Trimmer Line 15 m






Ideal for Cordless Line Trimmers

Twist Line  Spiral Line 

Description	Length	Diameter	Part No.
Twist Line	50' (15 m)	0.080" (2 mm)	197472-9
Spiral Line		0.106" (2.7 mm)	198505-3
		0.094" (2.4 mm)	198501-1



				Line Trimmer Heads															
		Line Trimmer Model (CC / LXT)	Thread Direction of Trimmer Spindle	EBH253U 24.5cc	EBH341L 33.5cc	EBH341U 33.5cc	DUR181Z 18V LXT	DUR182LZ 18V LXT	DUR187LZ 18V LXT	DUR364LZ 18Vx2 LXT	EBH341L 33.5cc	ER2600L 25.7cc	EM2600L 25.7cc	EBH253L 24.5cc	ER2550LH 24.5cc	EX2650LH (ER400MP) 25.4cc	EX2650LH (EM400MP) 25.4cc		
Model	Line Feed System	Notes																	
	B-70275	Auto	16" Cutting Width	•															
	B-02945		16" Cutting Width																
	6218020001	Bump Feed	18" Cutting Width																
	DA00000454		17" Cutting Width																
	196324-1		16-1/2" Cutting Width	•		•	•	•			•								
	122980-1		16-1/8" Cutting Width																
	126048-5		16" Cutting Width			•	•												
	B-05131		14" Cutting Width																
	197297-1		15-3/4" Cutting Width																
	DA00000655		11-3/4" Cutting Width																
	195149-0		10-1/4" Cutting Width																
	198385-7																		
	196324-1	Manual	18" Cutting Width																
	195858-1																		
	196146-9																		
B-02951	B-02951	Manual	18" Cutting Width																

Blower Accessories			
	Description	For Model No.	Part No.
	16" Long Nozzle	DUB362	455915-0
	11" Extension Nozzle		456957-7
	11" Flat Nozzle		456958-5
	12" Flat Nozzle	BHX2500CA	451753-8
	21" Long Curved Nozzles		DUB361
		DUB182, DUB183	TP00000199





Shoulder Strap



Chest Harness

Brush Cutter, Line Trimmer & Blower Chest Harnesses & Shoulder Straps

Brushcutter, Trimmer & Blower Model		EBH253U	EBH341U	DUB362Z	HXU03ZX2	DUR181Z	DUR182LZ	DUR364LZ	EBH341L	EM2600L	ER2600L	EBH253L	EX2650LH	ER2550LH
Model														
6247001001	Chest Harness	•	•		•									
122906-3		•	•		•									
125516-5	Shoulder Strap				•	•	•	•	•	•	•	•	•	•
126012-6					•	•	•	•	•	•	•	•	•	•
166094-6				•										

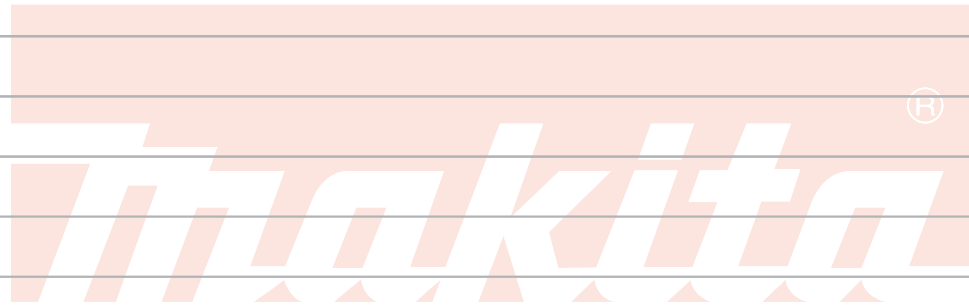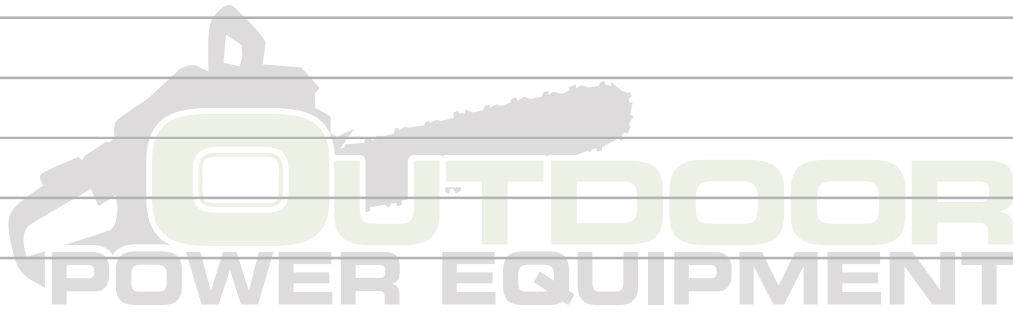

Makita Canada **Order Desk & Distribution Centres**

Western Canada

Phone: 604 272-3104
Toll Free Phone: 1 800 663-0909
Toll Free Fax: 1 800 667-7078
Email: orderdeskmcv@makita.ca

Central, Québec & Eastern Canada

BILINGUAL SERVICE

Phone: 905 571-2200
Toll Free Phone: 1 800 263-3734
Toll Free Fax: 1 800 565-0906
Email (English): orderdeskmct@makita.ca
Email (Français): orderdeskmcq@makita.ca

Factory Service Centres 13 Locations From Coast To Coast

Richmond / Vancouver
11771 Hammersmith Way,
Richmond, BC. V7A 5H6
Phone: 604 272-3104
Toll Free: 1 800 663-0909
Fax: 604 272-5416

Burnaby / Vancouver
2288 Holdom Avenue,
Burnaby, BC. V5B 4Y5
Phone: 604 291-1511
Toll Free: 1 877 295-1511
Fax: 604 291-1599

Calgary
#8 - 6115 4th Street SE,
Calgary, AB. T2H 2H9
Phone: 403 243-3995
Toll Free: 1 800 267-0445
Fax: 403 287-3044

Edmonton
11614 - 149 Street NW,
Edmonton, AB. T5M 3R3
Phone: 780 455-6644
Toll Free: 1 888 455-6644
Fax: 780 451-4877

Saskatoon
206A - 2750 Faithful Avenue,
Saskatoon, SK. S7K 6M6
Phone: 306 931-0111
Toll Free: 1 888 931-0111
Fax: 306 931-4574

Winnipeg
1670 St. James Street,
Winnipeg, MB. R3H 0L3
Phone: 204 694-0402
Toll Free: 1 800 550-5073
Fax: 204 694-5782

London
317 Adelaide Street S. Unit 117,
London, ON. N5Z 3L3
Phone: 519 686-3115
Toll Free: 1 800 571-0899
Fax: 519 686-4347

Mississauga / Toronto
6350 Tomken Road Unit 8,
Mississauga, ON. L5T 1Y3
Phone: 905 670-7255
Toll Free: 1 888 221-9811
Fax: 905 670-0120

Whitby / Toronto
1950 Forbes Street,
Whitby, ON. L1N 7B7
Phone: 905 571-2200
Toll Free: 1 800 263-3734
Fax: 1 800 867-1683



**Makita Canada
Head Office &
Distribution
Centre**



Ottawa / Nepean
210 Colonnade Road, Unit 11,
Ottawa, ON. K2E 7L5
Phone: 613 224-5022
Toll Free: 1 888 560-2214
Fax: 613 224-2360

Montreal / St. Leonard
6389 Boulevard Couture,
St. Leonard, QC. H1P 3J5
Phone: 514 323-1223
Toll Free: 1 800 361-7049
Fax: 1 800 561-5953

Québec City / Les Saules
1200 St. Jean Baptiste Unit 106,
Québec, QC. G2E 5E8
Phone: 418 871-5720
Toll Free: 1 800 663-5757
Fax: 418 871-6684

Dartmouth / Halifax
204 Brownlow Avenue, Unit #145,
Dartmouth, NS. B3B 0M4
Phone: 902 468-7064
Toll Free: 1 888 625-4821
Fax: 902 468-3551



Follow Us!
[@makita.ca](https://www.instagram.com/makita.ca)

When **QUALITY & SERVICE** Counts
Choose Makita

makita.ca

Printed in Canada 2019vr1