



ULTRA-GRADE GLOW STONE LUMINOSITY RATINGS (12mm)

Type: ULTRA	Decay Time (mcd/m ²)					
	30 minutes	60 minutes	120 minutes	240 minutes	360 minutes	720 minutes
Emerald Yellow AGT-U-EY-1/2 (12mm)	166.7	75.8	35.3	33.1	30.2	24.4
Aqua Blue AGT-U-AB-1/2 (12mm)	83.6	36.3	16.3	14.2	12.3	10.4
Sky Blue AGT-U-SB-1/2 (12mm)	75	33	14.8	12.6	10.1	8.4
Plasma Purple AGT-U-PP-1/2 (12mm)	32	13.3	5.7	4.8	3.1	2.6

* Luminosity Diminution: Glow Stone luminosity will diminish 1%-2% per year. For example in 20yrs. luminosity will be at 60%-80%.

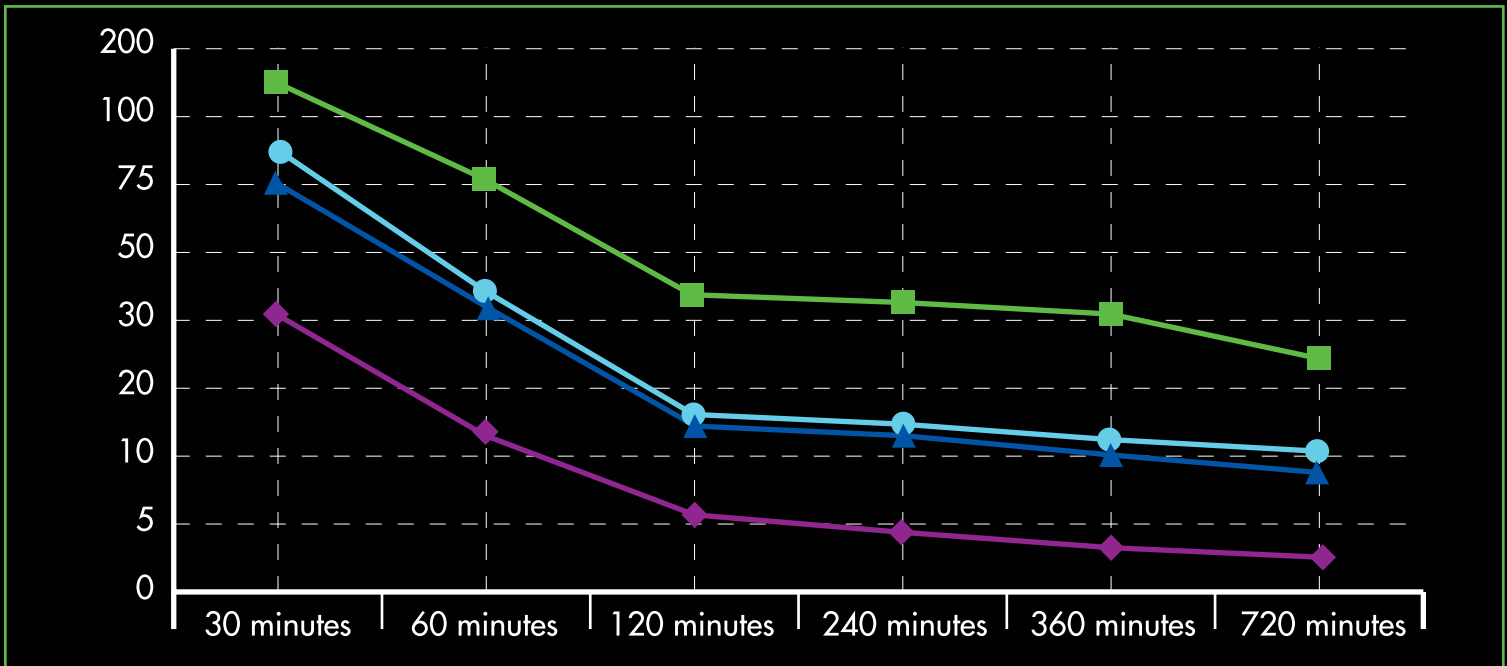

^ According to Germany DIN67510 Part 1

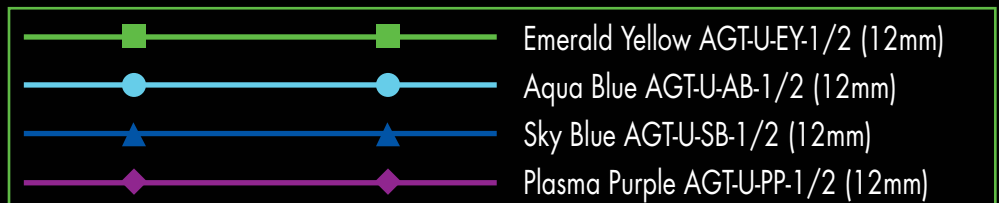

Disclaimer:

The information in this data sheet is based upon laboratory tests we believe to be accurate and is intended for guidance only. All recommendations or suggestions relating to the use of the products sold by Ambient Glow Technology whether in technical documentation, or in response to a specific inquiry, or otherwise, are based on data which, to the best of our knowledge is reliable. All associated product information and instructions were designed for users with the requisite knowledge and industrial skills necessary for proper product application and it is the end-user's responsibility to determine the suitability of the product for its intended use. Ambient Glow Technology has no control over either the quality or condition of the substrate, or the many other factors affecting the use and application of the product. Ambient Glow Technology does therefore not accept any liability arising from loss, injury or damage resulting from such use of the contents of this data sheet (unless there is written agreements stating otherwise). The data contained herein may be modified at anytime due to further advances in photoluminescent technologies.

For more information please contact us at:

905.250.9642

www.ambientglowtechnology.com