




ELECTRIC HYDRAULIC 12" SIDE EXTENSION

ITEM 20728

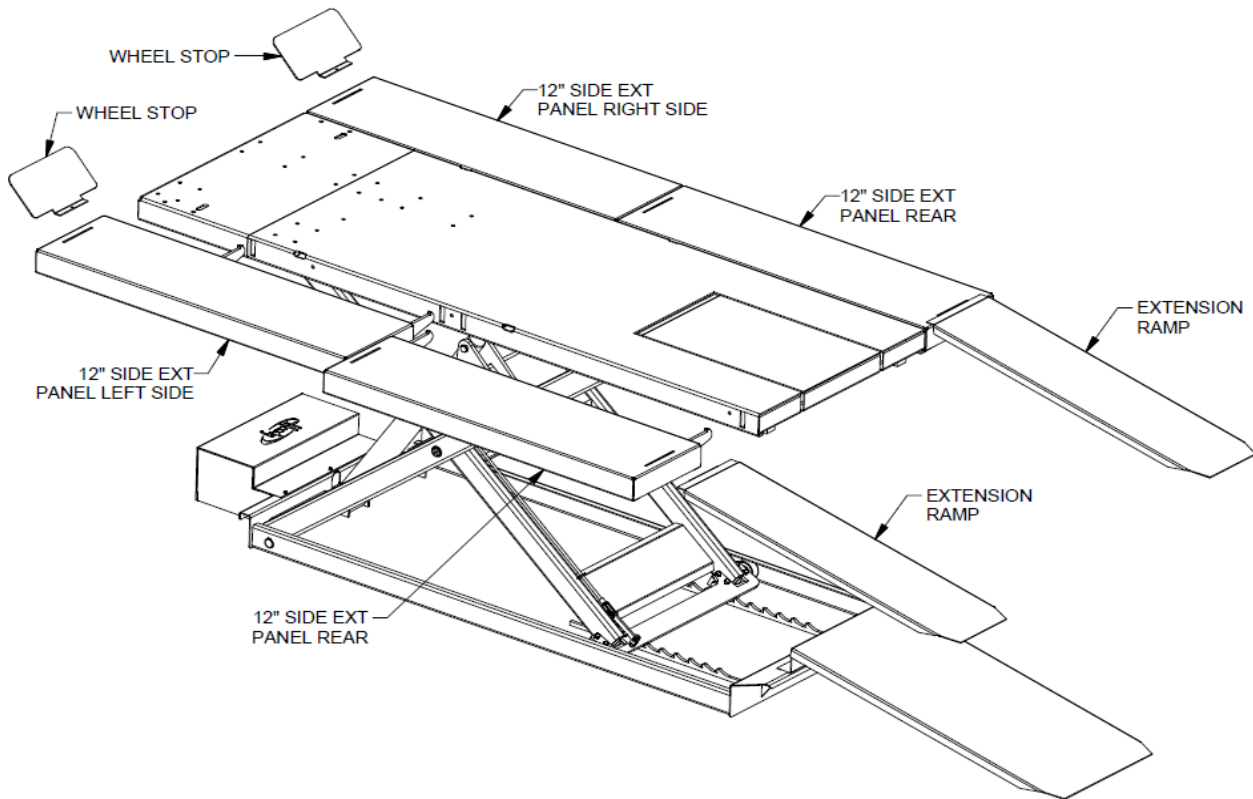


1. Insert the two arms of the side extension panels through the rectangular openings in the sides of the top.
2. Lift up on the panels so that the hook part of the arm slides past the lock bar located on the under side of the table top.
3. When the arms are fully inserted, the panel should be against the lift top side with it's top surface now flush with the lift's top surface.
4. Wheel stops and ramp extensions are mounted as shown using the slots found at the ends of the extension panels. Stops and ramps are interchangeable between front and rear of the lift.



THE CARLSON COMPANY
Your Source For Professional Service Equipment

800-222-6199 • 949-768-3333 • Fax 949-768-3336

www.TheCarlsonCompany.com

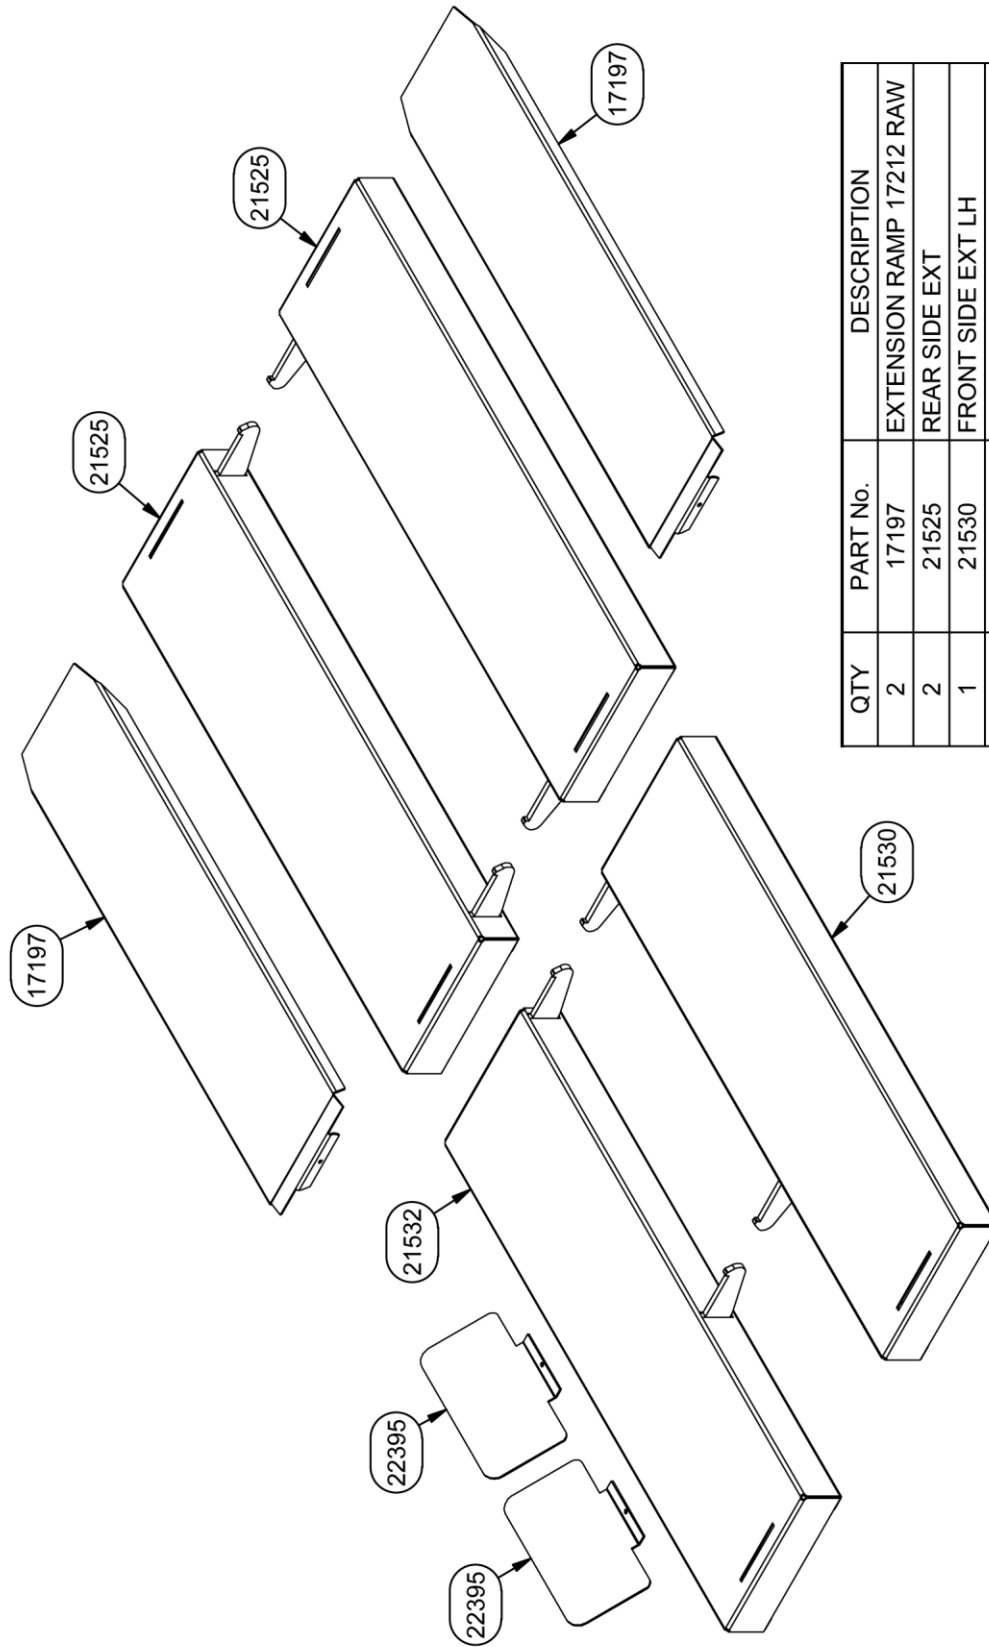

QTY	PART No.	DESCRIPTION
2	17197	EXTENSION RAMP 17212 RAW
2	21525	REAR SIDE EXT
1	21530	FRONT SIDE EXT LH
1	21532	FRONT SIDE EXT RH
2	22395	11 INCH WHEEL STOP