# H KEELING LTD

**Manufactured in Great Britain**

## TECHNICAL SPECIFICATION

# P4. 4 - 6 MJ

**Please note for bespoke sizes please contact our Design Team on +44 (0) 2392 796633**

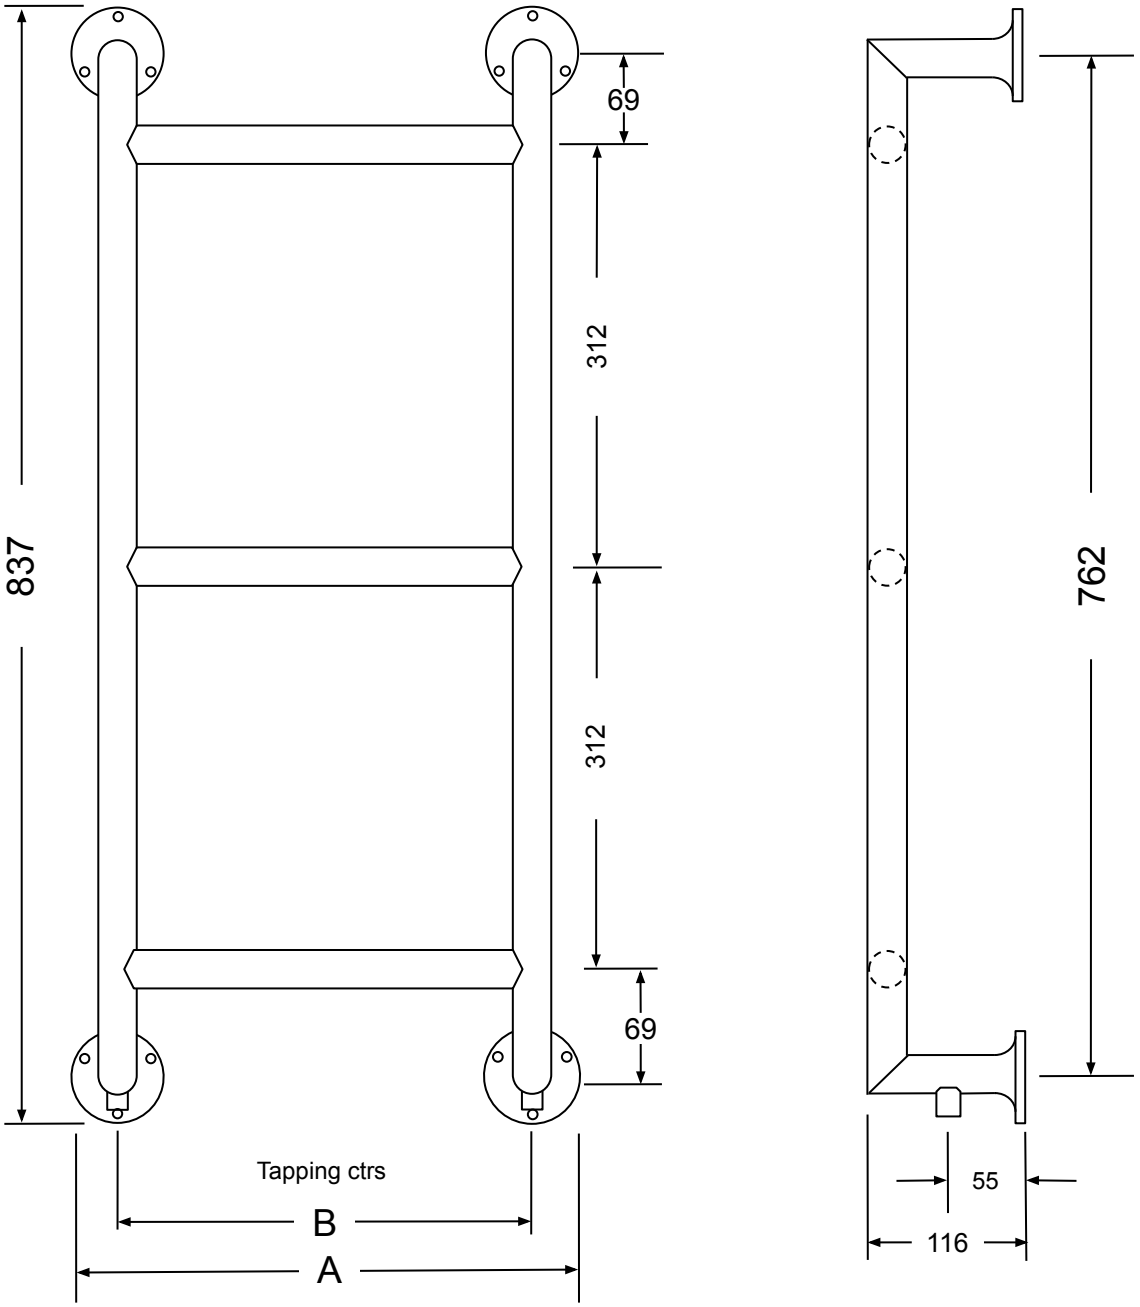


| Dimensions. A. | Centres. B. | Tapping ctrs. | BTU's. | Wattage. |
|---|---|---|---|---|
| 685mm | 610mm | 610mm | 597 | 175 |
| 837mm | 762mm | 762mm | 676 | 198 |
| 989mm | 914mm | 914mm | 754 | 221 |

| P4 Mitred Range. | |
|---|---|
| P4.4 | 837 x 685 |
| P4.5 | 837 x 837 |
| P4.6 | 837 x 989 |

**Test Pressure:** 8 bar.
**Max. Working Pressure:** 5 bar.
**Max. Working Temperature:** 85°C.
**Material:** 32mm DZR Brass.
**Connections:** ½" BSP.
**Joints:** Hand Brazed Silver Solder.
**Finish:** Hand Polished.
**Plated To:** British Standards.
**Leak Tested:** 3 Times.
**Heat Output:** In accordance with EN442.

To be installed by a suitably qualified professional in accordance with local water byelaws.

Our Towel Warmers are suitable for:
Most Central Heating Systems.
Hot Water Systems. **(unsuitable for use with column radiator inserts)**
Dual Fuel Systems.
Electric only.

**Please confirm with your installer/contractor that there is not a water softener fitted on the system prior to installation.**

**All dimensions are subject to +/- 3 mm tolerance.**