



### Overview

The **ECP-500 series** are microprocessor-based programmable controllers designed to control various building automation applications such as air handling units, multi-zone applications, chillers, boilers, cooling towers, and plant applications. They can also be used for lighting control and power measurement applications. Each controller uses the LonTalk® communication protocol and is LONMARK certified as a Multi-I/O module.

This series contains two models: ECP-500 and ECP-510. These two models support various input types including resistance, voltage, and digital-based ones. Moreover, they provide digital, floating, pulse width modulation, and proportional control for valves, heating elements, fans, and lighting applications. In particular, the ECP-510 has the added convenience of Hand-Off-Auto (HOA) switches and potentiometers for output manual override.

Both controller models work with the EC-Smart-Sensor Series, a line of communicating sensors that can be used for indoor temperature measurement, setpoint adjustment, and occupancy state override. In addition, both controller models are Open-to-Wireless® ready, and when paired with the Wireless Receiver, they work with a variety of wireless battery-less sensors and switches.

Each controller can be programmed using either EC-gfxProgram, a state-of-the-art object-oriented graphical programming interface tool, or EC-Program, a user-friendly line-by-line programming tool. Both tools are accessible from any LNS®-based software such as Distech Controls' Lonwatcher 3 or from any multi-protocol platform software that supports LONWORKS devices, such as Distech Controls' EC-Net<sup>AX</sup>, which is powered by the Niagara<sup>AX</sup> Framework®.

### Applications

- Meets the requirements of the following applications:
  - Air Handling Units
  - Multi-Zone Applications
  - Chillers
  - Boilers
  - Cooling Towers
  - Plant Applications
- Improves energy efficiency when combined with:
  - CO<sub>2</sub> sensors as part of a demand-controlled ventilation strategy that adjusts the amount of fresh air intake according to the number of building occupants
  - Variable-frequency drives to adjust motor speed according to the instantaneous demand of an application
- Works with a wide range of wireless battery-less sensors

### Features & Benefits

- Programmable using EC-gfxProgram or EC-Program, which are accessible in both LNS-based and Niagara<sup>AX</sup>-based software, allowing you to work with your preferred network management platform
- Available with an optional Wireless Receiver that supports up to 14 wireless inputs, letting you create wire-free installations and use various wireless battery-less sensors and switches
- LONMARK Multi-I/O module certified, guaranteeing interoperability with other manufacturers' LONMARK-approved controllers
- Highly accurate universal inputs support thermistors and resistance temperature detectors (RTDs) that range from 100 Ohms to 100 000 Ohms, giving you the freedom of using your preferred or engineer-specified sensors, in addition to any existing ones
- HOA switches and potentiometers, allowing you to override control actions for testing purposes or when performing equipment maintenance

## Models in this Series



Model	ECP-500	ECP-510
Points	28-Point Controller	28-Point Controller
Universal inputs	16	16
Wireless inputs <sup>1</sup>	14	14
15 Vdc Power Supply	■	■
Universal outputs	12	12
HOA switches and potentiometers		■
Product Number (EC-Program)	CDIP-500X-00	CDIP-510X-00
Product Number (EC-gfxProgram)	CDIP-500G-00	CDIP-510G-00

1. Available when an optional Wireless Receiver is connected to the controller.

## Recommended Applications

Model	ECP-500	ECP-510
Air Handling Unit	■	■
Multi-Zone Application	■	■
Chiller	■	■
Boiler	■	■
Cooling Tower	■	■
Plant Application	■	■

## Open-to-Wireless Wireless Receiver – Optional



To reduce the cost of installation, and minimize the impact on existing partition walls, the Wireless Receiver enables a controller in this series to communicate with a line of wireless battery-less room sensors and switches.

Wireless Receiver (315)	- Receiver for EnOcean® 315MHz wireless-enabled sensors and switches
Wireless Receiver (868)	- Receiver for EnOcean 868.3MHz wireless-enabled sensors and switches

Note that controllers have one wireless port to support a single Wireless Receiver.

For more information about the EnOcean technology and Open-to-Wireless, refer to the Open-to-Wireless Solution Guide. For more information about the Wireless Receiver module, refer to the Wireless Receiver Datasheet. These documents can be found on our web site at [www.distech-controls.com](http://www.distech-controls.com).

## Supported Platforms



### EC-Net<sup>AX</sup>

EC-Net<sup>AX</sup> is a web-enabled multi-protocol integration solution powered by the Niagara<sup>AX</sup> Framework, establishing a fully Internet-enabled, distributed architecture for real-time access, automation and control of devices. EC-Net<sup>AX</sup>'s open framework creates a common development and management environment for integration of LonWORKS<sup>®</sup>, BACnet<sup>®</sup> and other protocols. Regardless of manufacturer and protocol, the EC-Net<sup>AX</sup> system provides a unified modeling of diverse systems and data, providing one common platform for development, management and enterprise applications.




### LonWORKS Network Services (LNS)

LNS<sup>®</sup> is a client-server platform that allows multiple users, running different LNS-compatible applications, to access a common source for directory, installation, management, monitoring and control services for the network system being managed. Distech Controls' Lonwatcher is an example of a LNS-based network management tool that can use Plug-Ins to configure and monitor controllers and devices in the control system.

## EC-Net<sup>AX</sup> Wizards and LNS Plug-Ins


### EC-gfxProgram Graphical Programming Tool

Distech Controls' EC-gfxProgram is a programming tool that allows you to quickly create control sequences by "dragging and dropping" block objects and then linking the objects with a simple "click, select and release". Select objects from an extensive library of over 90 commonly used functions as well as create your own custom blocks. With a user-friendly interface and intuitive programming environment, HVAC programming could not be easier. Refer to the EC-gfxProgram datasheet for more information.

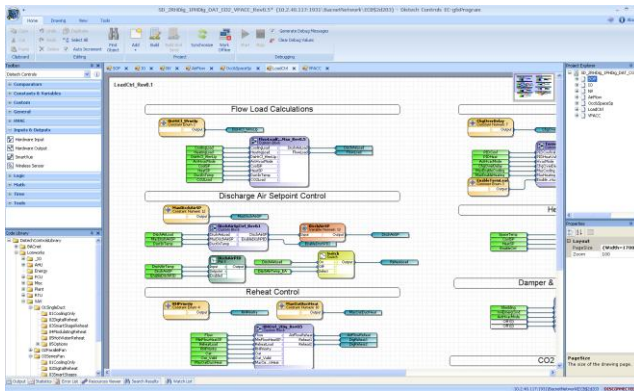

### EC-Program Programming Tool

Distech Controls' EC-Program is unique in the controls industry because it combines a user-friendly GUI (Graphical User Interface) with the power and flexibility of a code editor and compiler. The EC-Program configuration tool uses a special and simplified version of BASIC that has been developed in-house and that is custom made to suit control requirements. Refer to the EC-Program datasheet for more information.

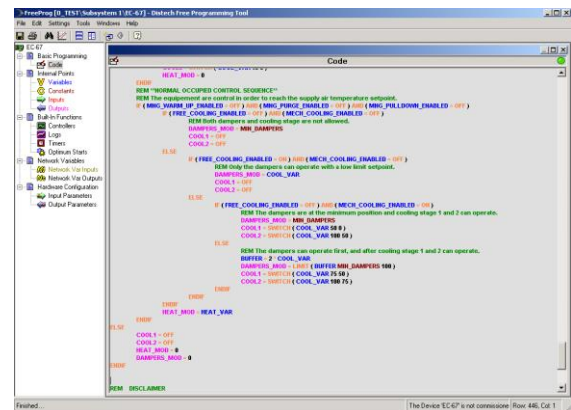

### EC-gfxProgram Software features:

- Program both ECP Series LonWORKS and ECB Series BACnet controllers with the same tool
- Supplied as freeware – there are no associated licensing costs
- Block-oriented programming
- Live debugging allows user to view code execution, input/output values and to detect errors in real-time
- Extensive block library of the most commonly used functions divided into 11 convenient categories containing over 90 block objects
- A code library for managing your favorite or most commonly used code or code sections
- Backup / Restore function stores the complete code in the controller allowing the retrieval of all programming code features

### EC-Program Software features:

- Line-by-line programming
- Built-in screen to view and configure internal point values such as variables, constants, etc.
- Uses integers ranging from  $\pm 32767$
- 18 NVIs and 18 NVOs; changeable type and length
- 2 NVI Fan-in bindings
  - 1 NVI – High and Low selection
  - 1 NVI – Weighted Average
- 10 PID loops
- 4 NVI Schedules. Changeable type and length. Supported types are: SNVT\_tod\_event; SNVT\_occupancy; and SNVT\_hvac\_mode
- Programming functions such as Reserved Words (SQRT, SWITCH, LIMIT, etc.)
- Up to 24 trend log objects for a total of 12,000 stored events in the controller

## Other Configuration Software

### EC-Scheduler Tool

Distech Controls' EC-Scheduler allows users to easily configure a week-based schedule and a special day schedule for holidays. Easily add and remove the special day event into the calendar by a simple click of the mouse!

### RTC Configuration Tool

Distech Controls RTC Configuration Tool allows users to manage the time, date and daylight saving time for use with any device on the network.

## Complementary Products

### Temperature Sensors

#### Supported Smart-Sensors (EC-gfxProgram only)



EC-Smart-Sensor-100	Communicating sensor with 2-line LCD, setpoint adjustment, occupancy override, and room temperature display
EC-Smart-Sensor-200	Communicating sensor with 2-line LCD, setpoint adjustment, fan speed control, occupancy override, HVAC mode selection, and room temperature display
EC-Smart-Sensor-FC	Communicating sensor with 2-line LCD, setpoint adjustment, fan speed control, and room temperature display
EC-Smart-Sensor-FC-CF	Communicating sensor with 2-line LCD, setpoint adjustment, fan speed control, room temperature display, and °C/°F toggle button

#### Allure EC-Sensor

Line of discrete sensors



EC-Sensor	Room temperature sensor with communication jack
EC-Sensor-O	Room temperature sensor with occupancy override button and communication jack
EC-Sensor-S	Room temperature sensor with setpoint adjustment and communication jack
EC-Sensor-SO	Room temperature sensor with setpoint adjustment, occupancy override button, and communication jack
EC-Sensor-SOF	Room temperature sensor with setpoint adjustment, occupancy override button, fan speed selection, and communication jack

### Open-to-Wireless Sensors and Switches (requires Wireless Receiver and EC-gfxProgram)

#### Allure Wireless Battery-less ECW-Sensor

Line of wireless, battery-less sensors. Available in EnOcean 315MHz and 868.3MHz versions.



ECW-Sensor	Room temperature sensor
ECW-Sensor-O	Room temperature sensor with occupancy override button
ECW-Sensor-S	Room temperature sensor with setpoint adjustment
ECW-Sensor-SO	Room temperature sensor with setpoint adjustment and occupancy override button
ECW-Sensor-SOF	Room temperature sensor with setpoint adjustment, occupancy override button, and fan speed selection

#### Wireless EnOcean Sensors and Switches



SR65	Wireless, solar-cell powered outdoor temperature sensor. Available at 315MHz or 868.3MHz.
------	---



SR65 VFG	Wireless, solar-cell powered surface temperature contact sensor. Available at 315MHz or 868.3MHz.
----------	---



SR65 AKF Series	Wireless, solar-cell powered duct temperature sensor. Available at 315MHz or 868.3MHz.
-----------------	--

For a complete list of the Open-to-Wireless EnOcean sensors and switches that are compatible with the controllers in this series, refer to the Open-to-Wireless Solution Guide which can be found on our web site at [www.distech-controls.com](http://www.distech-controls.com).


#### Relay and Relay Base



Relay	SPDT (NO/NC) dry contact relay; 12VDC coil.
Relay Base	Din-rail mountable socket base.
LED Module	Red LED for relay.

For more information on these or other Distech Controls products please refer to our web site at [www.distech-controls.com](http://www.distech-controls.com) or contact [sales@distech-controls.com](mailto:sales@distech-controls.com).

## Controller Dimensions

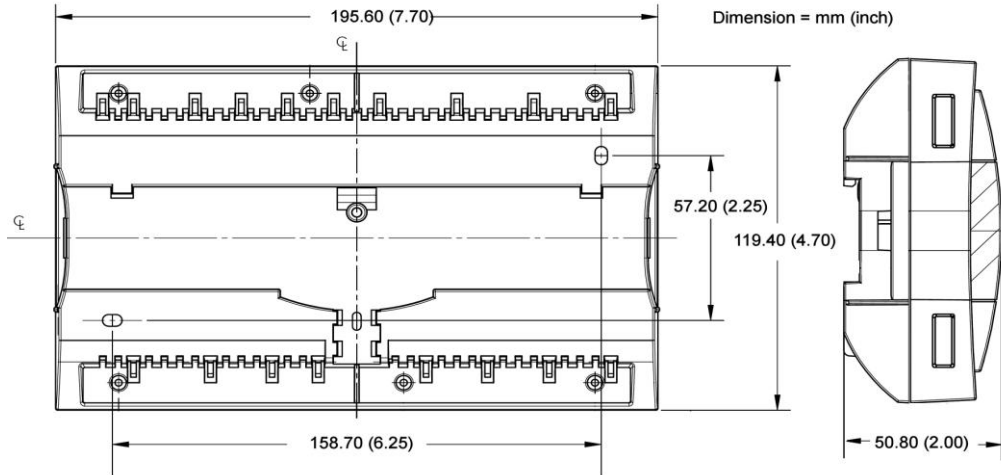

## Product Specifications

### Power

Voltage	24VAC/DC; $\pm 15\%$ ; 50/60Hz; Class 2
Protection	3.0A user-replaceable fuse
Typical Consumption	25VA; all outputs with 20mA load @ 12VDC & 15VDC output: 80mA (4 x 20mA)
Maximum Consumption	50VA

### Interoperability

Communication	LonTalk protocol
Channel	TP/FT-10; 78Kbps
LONMARK Interoperability Guidelines	Version 3.4
Device Class	Multi I/O module
LONMARK Functional Profile	
- Input objects	Open-Loop Sensor #1
- Output objects	Open-Loop Actuator #3

### Hardware

Processor	Neuron <sup>®</sup> 3150; 8 bits; 10MHZ
Memory	Non-volatile Flash 64K (APB applications) Non-volatile Flash 128K (storage)
Clock	Real-time clock chip
Battery (for clock only)	CR2032 lithium battery
Status Indicator	Green LEDs: power status & LON TX Orange LEDs: service & LON RX
Communication Jack	LON <sup>®</sup> audio jack mono 1/8" (3.5mm)

### Environmental

Operating Temperature	0°C to 50°C; 32°F to 122°F
Storage Temperature	-20°C to 70°C; -4°F to 158°F
Relative Humidity	0 to 90% Non-condensing

### Enclosure

Material	ABS type PA-765A
Color	Blue casing & grey connectors
Dimensions (with Screws)	7.7" x 4.7" x 2.0" (195.6mm x 119.4mm x 50.8mm)
Shipping Weight	1.17lbs (0.53kg)
Installation	Direct din-rail mounting or wall mounting through mounting holes (see figure above for hole positions)

### Inputs

Input Types	Universal; software configurable
-Voltage	0-10VDC
-Current	4-20mA with 249 $\Omega$ external resistor (wired in parallel)
-Digital	Dry contact
-Pulse	Dry contact; 500ms minimum ON/OFF
-Resistor	
Thermistor	10K $\Omega$ Type 2, 3 (10K $\Omega$ @ 25°C; 77°F) Range: -40°C to 150°C; -40°F to 302°F
Platinum	Pt1000 (1K $\Omega$ @ 0°C; 32°F) Range: -40°C to 150°C; -40°F to 302°F Pt100 (100 $\Omega$ @ 0°C; 32°F) Range: -40°C to 135°C; -40°F to 275°F
Nickel	RTD Ni1000 (1K $\Omega$ @ 0°C; 32°F) Range: -40°C to 150°C; -40°F to 302°F
Potentiometer	Translation table configurable on several points
Input Resolution	16-bit analog / digital converter

### Outputs

Universal	0-10VDC linear, digital 0-12VDC (on/off), 0-20mA, floating <sup>1</sup> or PWM - PWM control: adjustable period from 2 seconds to 15 minutes - Floating control: requires two consecutive outputs <sup>1</sup> - Min pulse on/off: 500msec. - Adjustable drive time period - 60mA max. @ 12VDC (60°C; 140°F) - Load resistance: - Minimum 200 $\Omega$ for 0-10VDC, 0-12VDC output - Maximum 500 $\Omega$ for 0-20mA output - Auto-reset fuse - 60mA @ (60°C; 140°F) - 100mA @ (20°C; 68°F)
Output Resolution	10-bit digital / analog converter
Power Supply Output:	15VDC; maximum 240mA

## Product Specifications (continued)

### Wireless Receiver<sup>2</sup>

Communication	EnOcean wireless standard
Number of wireless inputs <sup>3</sup>	14
Supported Wireless Receivers	Wireless Receiver (315) Wireless Receiver (868)
Cable	Telephone cord
- Connector	4P4C modular jack
- Length	6.5ft; 2m

### Electromagnetic Compatibility

CE -Emission	EN61000-6-3: 2007; Generic standards for residential, commercial and light-industrial environments
-Immunity	EN61000-6-1: 2007; Generic standards for residential, commercial and light-industrial environments
FCC	This device complies with FCC rules part 15, subpart B, class B



### EC-Smart-Sensors

Models Supported	EC-Smart-Sensor-100, EC-Smart-Sensor-200, EC-Smart-Sensor-FC, EC-Smart-Sensor-FC-CF
Power & communication	2-wire
Number of sensors supported	1

### Agency Approvals

UL Listed (CDN & US) Material <sup>4</sup>	UL916 Energy management equipment UL94-5VA
--	---





### Communication Protocols and Standards



enOcean®




1. Available only when controller is programmed with EC-gfxProgram.
2. Available when an optional external Wireless Receiver is connected to the controller. Refer to the Open-to-Wireless Solution Guide for a list of supported EnOcean wireless modules.
3. Some wireless sensors may use more than one wireless input from the controller.
4. All materials and manufacturing processes comply with the RoHS directive  and are marked according to the Waste Electrical and Electronic Equipment (WEEE) directive .

## Product Warranty & Total Quality Commitment


All Distech Controls product lines are built to meet rigorous quality standards and carry a two-year warranty. Distech Controls is an ISO 9001 registered company.



## Functional Profile (with EC-gfxProgram)

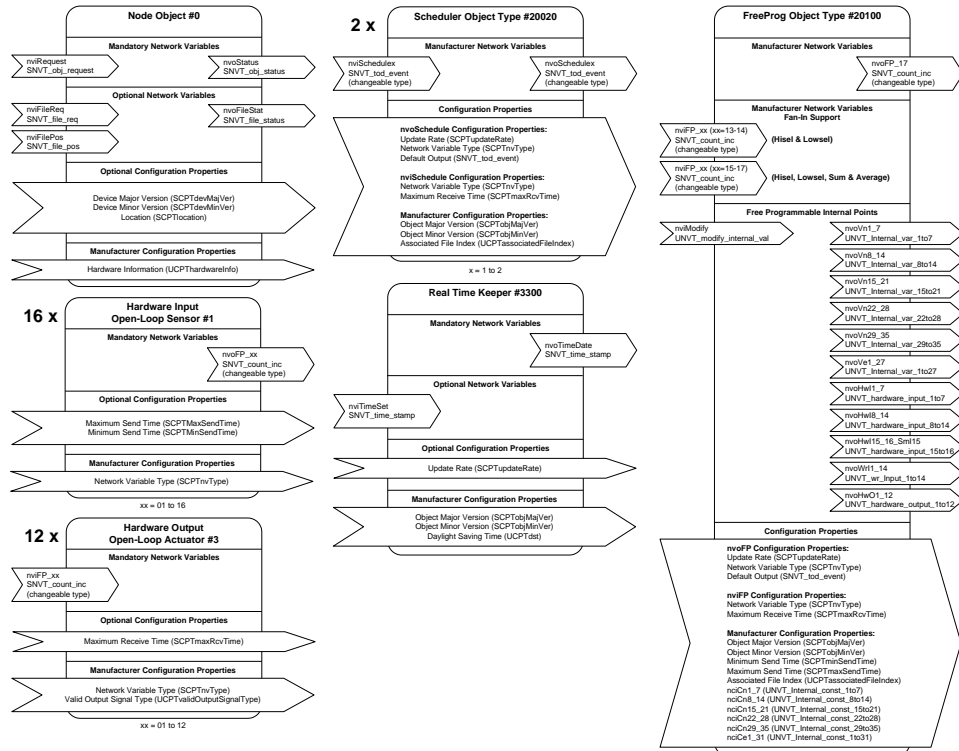

## Functional Profile (with EC-Program)

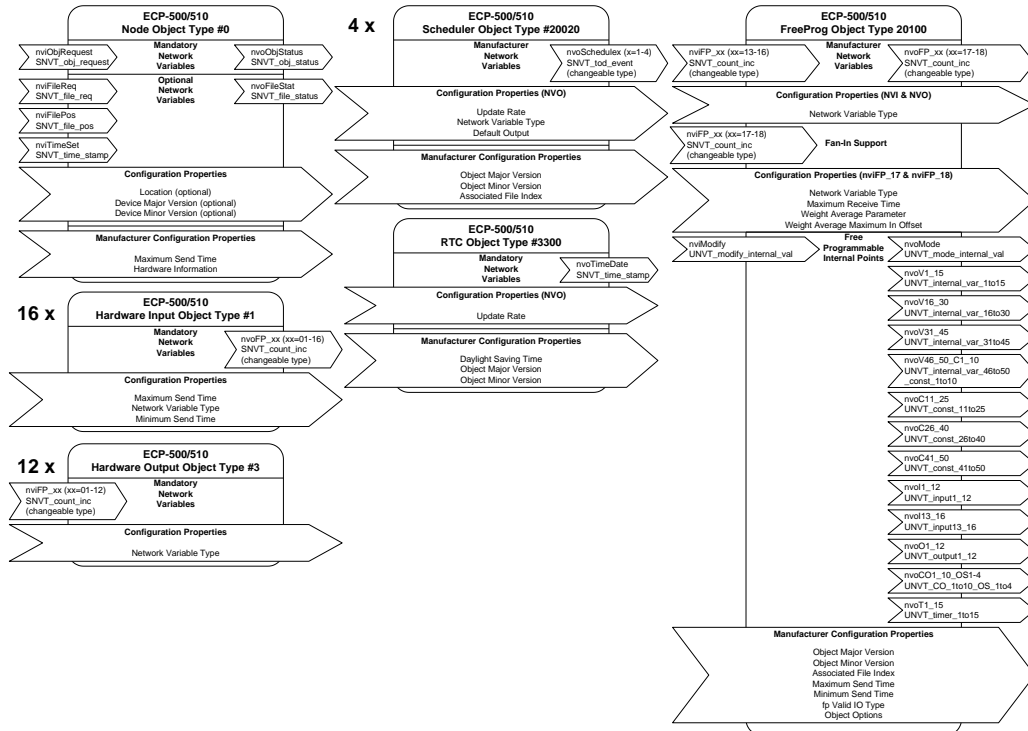

Specifications subject to change without notice.

Distech Controls, the Distech Controls logo, and Open-To-Wireless are trademarks of Distech Controls Inc.; LON, LONWORKS, LONMARK, LonTalk, and LNS are registered trademarks of Echelon Corporation; Niagara<sup>AX</sup> Framework is a registered trademark of Tridium, Inc.; BACnet is a registered trademark of ASHRAE; EnOcean is a registered trademark of EnOcean GmbH. All other trademarks are property of their respective owners.



05DI-DSEP5XX-31

ECP-500 Series

www.distech-controls.com