



# T-32-P™

## Communicating Thermostats

The Comfort System™ T-32-P universal thermostat is a perfect mix of aesthetics, intuitive operation and performance at an amazingly affordable price. The T-32-P is compatible with most commercial HVAC systems and is ideally suited for use with the Comfort System zoning panels.

# COMFORT SYSTEM™

### Features and Benefits:

- Manual or auto changeover
- Programmable or non-programmable
- Up to 3H/2C, gas/electric, heat pump or dual fuel
- Keypad and/or setpoint lockout
- Smart fan logic for commercial control
- Adaptive recovery
- 24 volts with non-volatile memory
- Large backlit display
- Short cycle protection
- Optional indoor or outdoor sensor
- Outdoor temperature display (with optional outdoor sensor)
- Available with integrated Modbus communications (Version 2.20)



**Warranty:** 5 years

**ASK ABOUT OUR FREE  
PRIVATE LABELING PROGRAM**



**Innovative Products**

**Free Same Day Shipping**


w: [jacksonsystems.com](http://jacksonsystems.com)

p: 888-652-9663

# T-32-P™



# Thermostats

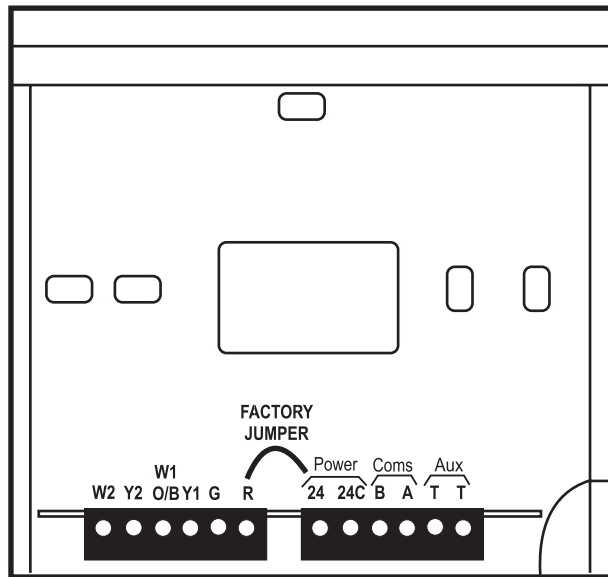

## Specifications:

<b>Dimensions</b>	4.00" Height x 4.38" Width x 0.88" Depth
<b>Display Size</b>	1.88" Height x 2.75" Width
<b>Input Voltage</b>	24VAC, 50/60 Hz
<b>Relay Rating</b>	24VAC @ 1A maximum per relay
<b>Operating Temperature</b>	32° F to 150° F
<b>Operating RH</b>	0% to 95% (non-condensing)
<b>Storage Temperature</b>	32° F to 150° F
<b>Temperature Sensors</b>	10K NTC type 2
<b>Short Cycle Protection</b>	Off or 4 minutes
<b>Control Range</b>	41° F to 122° F
<b>Outdoor Temperature Display Range</b>	-20° F to 140° F
<b>Backlight Life</b>	3,000 hours to half brightness
<b>Adaptive Recovery</b>	Time versus temperature differential
<b>Optional Communications Protocol</b>	Modbus (Version 2.20)

**Contractor-Friendly**

f: 317-227-1034

**Strong Technical Support**

e: [info@jacksonsystems.com](mailto:info@jacksonsystems.com)

**JACKSON**  
**SYSTEMS**  
Controls Done Right™