

Applications:

Parking structures, storage areas, shopping area walkways, entryway, and low level security.

Features


- » Designed specifically for Outdoor Parking Garage Applications
- » Designed specifically for Outdoor Canopy and Parking Garage Applications
- » Sealed die cast aluminum housing for harsh outdoor conditions JBOX or pendant mounting
- » Available in both 120277V & 347480V with 010V dimming
- » Available in 2 Lumen packages, 37005400lm with efficacy up to 139lm/W
- » Optics are optimized for Canopy or Parking Garage Applications
- » Polycarbonate optical lens with heat resisting
- » Three 1/2 threaded conduit entry points
- » Bilevel Motion sensor option available
- » Emergency Battery Backup available
- » Replace 100W up to 250W HID
- » -40°C to 45°C (-40°F to 113°F) Operating Temperature
- » UL/cUL Wet Location™
- » DLC Premium Qualified

Project: _____
 Location: _____
 Cat. No: _____
 Type _____
 Qty: _____
 Notes: _____




5 Year
Warranty

Dimension unit: inch/mm

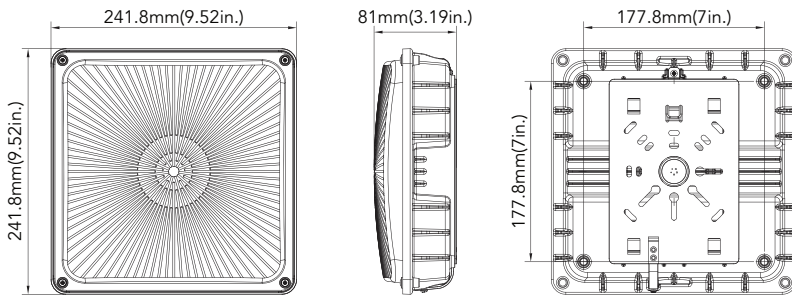

Photometrics

Parking Garage

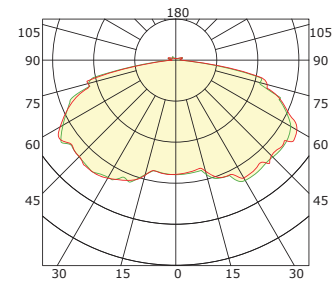

Ordering Guide

Example: ME-LAZPG07-27W-UNV-N-50K-PG-WT-MS

| Family | Wattage | Voltage | Dimming | Color Temp | Optics | Finish | Motion Sensor |
|------------|---------|--------------|------------------|------------|-------------------|--|------------------|
| ME-LAZPG07 | 27W | UNV 120-277V | D 0-10V Dimmable | 40K 4000K | PG Parking Garage | DB Dark Bronze WT White BK Black SG Silver Gray | MS Motion Sensor |
| | 40W | 48V 347-480V | N None | 50K 5000K | | | |

Performance Data

| System Watts | Voltage | Lumens (4000K) | LPW (4000K) | LUMENS (5000K) | LPW (5000K) |
|--------------|-------------|----------------|-------------|----------------|-------------|
| 27W | 120-277VAC | 3700lm | 137 lm/W | 3750lm | 139 lm/W |
| 40W | 120-277-VAC | 5300lm | 133 lm/W | 5400lm | 135 lm/W |