

### Applications:

Parking structures, storage areas, shopping area walkways, entryway, and low level security.

### Features

- » Designed specifically for Outdoor Parking Garage Applications
- » Sealed die cast aluminum housing for harsh outdoor conditions
- » Available in both 120-277V with 0-10V
- » dimming
- » Available in 1 Lumen packages, 5300lm with efficacy up to 118lm/W
- » Optics are optimized for Parking Garage Applications
- » Polycarbonate optical lens with heat resisting
- » Bilevel Motion sensor option available
- » Emergency Battery Backup available
- » Replace up to 250W HID
- » -40°C to 45°C (- 40°F to 113°F) Operating Temperature
- » UL/cUL Wet Location
- » DLC Premium Qualified under Parking Garage Luminaires

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat. No: \_\_\_\_\_

Type \_\_\_\_\_

Qty: \_\_\_\_\_


Notes: \_\_\_\_\_




5 Year  
Warranty

### Dimensions

Weight: 4.74lb

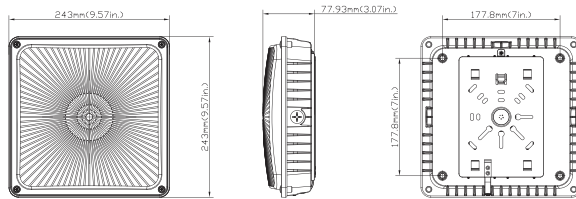


Weight: 5.18lb

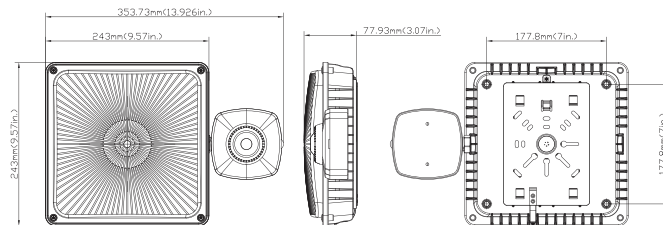

### Photometrics

Parking Garage



### Ordering Guide

Example: ME-LAZPG04-45W-UNV-N-50K-PG-WT-MS

Family	Wattage	Voltage	Dimming	Color Temp	Optics	Finish	Motion Sensor
MELAZPG04	45W	UNV 120-277V	D 0-10V Dimmable N None	40K 4000K 50K 5000K	PG Parking Garage	DB Dark Bronze WT White BK Black SG Silver Gray	MS Motion Sensor N None

### Electrical Data

Number of Drivers	Driver Current (mA)	Nominal Power (W)	Input Voltage (V)	Current (Amps)
1	1.12	45	120	0.38
		45	208	0.22
		45	240	0.19
		45	277	0.16

**Performance Data**

Luminaire Type	Rated Voltage	Wattage (W)	CCT	Initial Lumens	Luminaire Efficacy (lpw)	CRI	Power Factor	0-10V Dimmable	Motion Sensor	Emergency Battery	Certificate
Canopy	120-277	45	4000K	5000	111	70	0.9	NO	NO	NO	UL
Canopy	120-277	45	4000K	5000	111	70	0.9	YES	NO	NO	UL
Canopy	120-277	45	4000K	5000	111	70	0.9	NO	YES	NO	UL
Canopy	120-277	45	4000K	5000	111	70	0.9	NO	NO	YES	UL
Canopy	120-277	45	4000K	5000	111	70	0.9	YES	NO	YES	UL
Canopy	120-277	45	4000K	5000	111	70	0.9	NO	YES	YES	UL
Canopy	120-277	45	4000K	5000	111	70	0.9	YES	YES	NO	UL
Canopy	120-277	45	4000K	5000	111	70	0.9	YES	YES	YES	UL
Canopy	120-277	45	5000K	5300	118	70	0.9	NO	NO	NO	UL
Canopy	120-277	45	5000K	5300	118	70	0.9	YES	NO	NO	UL
Canopy	120-277	45	5000K	5300	118	70	0.9	NO	YES	NO	UL
Canopy	120-277	45	5000K	5300	118	70	0.9	NO	NO	YES	UL
Canopy	120-277	45	5000K	5300	118	70	0.9	YES	NO	YES	UL
Canopy	120-277	45	5000K	5300	118	70	0.9	NO	YES	YES	UL
Canopy	120-277	45	5000K	5300	118	70	0.9	YES	YES	NO	UL
Canopy	120-277	45	5000K	5300	118	70	0.9	YES	YES	YES	UL