

## Features

- » Direct wire lamps, must bypass the HID ballast before installation
- » Suitable for use in totally enclosed fixtures
- » Suitable for damp outdoor locations, water-resistant
- » Working temperature -40F ~ 140F, active heat dissipation with aircraft grade aluminum
- » 360 degree beam angle
- » Flame retardant materials
- » UL Listed
- » DLC 4.2 Qualified
- » 75,000 Hours
- » 5 Year Warranty Guarantee

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Cat. No: \_\_\_\_\_

Type \_\_\_\_\_


Qty: \_\_\_\_\_

Notes: \_\_\_\_\_



## LED Wattage and Lumen Values

WATTS	LUMENS
12W	1800L
18W	2700L
27W	4050L
36W	5400L
45W	6750L
54W	8100L

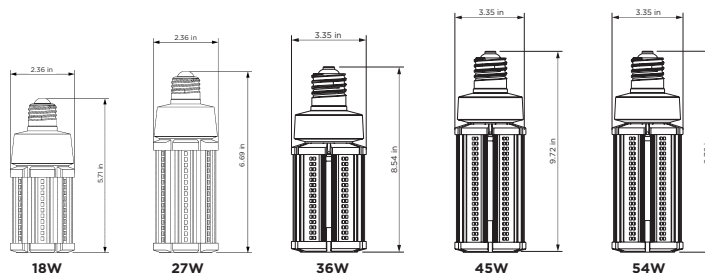

Suitable for Enclosed Fixtures



5 Year Warranty



Direct line voltage 100-270V  
NOT COMPATIBLE WITH BALLASTS

## Ordering Guide

EXAMPLE: LED-HIDRL-36W-UNV-E26-I-3000K-G5

TYPE	WATTAGE	VOLTAGE	BASE	DRIVER	CCT	GENERATION
LED-HIDRL	12W	UNV = 120-277V	E26 = Medium Base EX39 = Mogul Base	I = INTERNAL	22K = 2200K	G5
	18W				30K = 3000K	
	27W				35K = 3500K	
	36W				40K = 4000K	
	45W				50K = 5000K	
	54W				57K = 5700K	

## Mills Lighting Quick Ship Program Model #'s

LED-HIDRL-18W-UNV-E26-I-3000K-G5	LED-HIDRL-36W-UNV-E26-I-3000K-G5	LED-HIDRL-54W-UNV-E26-I-3000K-G5
LED-HIDRL-18W-UNV-E26-I-3500K-G5	LED-HIDRL-36W-UNV-E26-I-4000K-G5	LED-HIDRL-54W-UNV-E26-I-4000K-G5
LED-HIDRL-18W-UNV-E26-I-4000K-G5	LED-HIDRL-36W-UNV-E26-I-5000K-G5	LED-HIDRL-54W-UNV-E26-I-5000K-G5
LED-HIDRL-18W-UNV-E26-I-5000K-G5	LED-HIDRL-36W-UNV-EX39-I-3000K-G5	LED-HIDRL-54W-UNV-EX39-I-3000K-G5
LED-HIDRL-27W-UNV-E26-I-3000K-G5	LED-HIDRL-36W-UNV-EX39-I-4000K-G5	LED-HIDRL-54W-UNV-EX39-I-4000K-G5
LED-HIDRL-27W-UNV-E26-I-4000K-G5	LED-HIDRL-36W-UNV-EX39-I-5000K-G5	LED-HIDRL-54W-UNV-EX39-I-5000K-G5
LED-HIDRL-27W-UNV-E26-I-5000K-G5	LED-HIDRL-45W-UNV-E26-I-3000K-G5	
LED-HIDRL-27W-UNV-EX39-I-3000K-G5	LED-HIDRL-45W-UNV-E26-I-4000K-G5	
LED-HIDRL-27W-UNV-EX39-I-4000K-G5	LED-HIDRL-45W-UNV-E26-I-5000K-G5	
LED-HIDRL-27W-UNV-EX39-I-5000K-G5	LED-HIDRL-45W-UNV-EX39-I-3000K-G5	
	LED-HIDRL-45W-UNV-EX39-I-4000K-G5	
	LED-HIDRL-45W-UNV-EX39-I-5000K-G5	

