

www.abstraxtech.com | info@abstraxlabs.com | 15550 Rockfield Blvd, Suite B120 | Irvine, CA 92618


	Certificate of Analysis					
	Name: Matrix: Lot #: Product #:	Natrix: ot #:		Manufacture Date: Expiration Date: Overall Result:		
Test	Specific	cation		Resu	ult	
Appearance		<u> </u>				
with ASTM E 542 and NIST Proced ometers and temperature probes ar ording to master documents that a	erance requirements of ASTM E 288 a dure NBSIR 74-461. Balances are calibi re calibrated before first use and recalib ssure manufacture according to valida	rated regularly with weig orated regularly with a tl	ghts certified to hermometer to	raceable to the NIS' raceable to NIST sta	T national mas andards. All pr	
with ASTM E 542 and NIST Procedometers and temperature probes an cording to master documents that a ry for each lot manufactured. Specific Gravity @ 25 °C	dure NBSIR 74-461. Balances are calibre calibrated before first use and recalibrated manufacture according to validate same manufacture according to validate specifical same specifical same same same same same same same same	rated regularly with weig orated regularly with a tl sted methods. Batch reco	ghts certified to hermometer to	raceable to the NIS' raceable to NIST sta t raw material trace Resi	T national mas andards. All pro ability and pro	
with ASTM E 542 and NIST Procedometers and temperature probes an cording to master documents that a ry for each lot manufactured.	lure NBSIR 74-461. Balances are calibi re calibrated before first use and recalib ssure manufacture according to valida	rated regularly with weig orated regularly with a tl sted methods. Batch reco	ghts certified to hermometer to	raceable to the NIS' raceable to NIST sta t raw material trace	T national mas andards. All pro ability and pro	
with ASTM E 542 and NIST Procedometers and temperature probes are cording to master documents that a ry for each lot manufactured. Specific Gravity @ 25 °C Gas Chromatograph	dure NBSIR 74-461. Balances are calibre calibrated before first use and recalibrated manufacture according to validate same manufacture according to validate specifical same specifical same same same same same same same same	rated regularly with weigorated regularly with a the state of reconstruction cation Ethyl Ether	ghts certified to hermometer to	raceable to the NIS' raceable to NIST sta t raw material trace Resi	T national mas andards. All pro ability and pro	
with ASTM E 542 and NIST Procedometers and temperature probes an cording to master documents that a ry for each lot manufactured. Specific Gravity @ 25 °C	dure NBSIR 74-461. Balances are calibre calibrated before first use and recalibrated manufacture according to validate same manufacture according to validate specifical same specifical same same same same same same same same	rated regularly with weig prated regularly with a the sted methods. Batch reco cation	ghts certified to hermometer to	raceable to the NIS' raceable to NIST sta t raw material trace Resi	T national mas andards. All pro- ability and pro-	

Methylene Chloride

Pentane

Ethanol

Ethyl Acetate

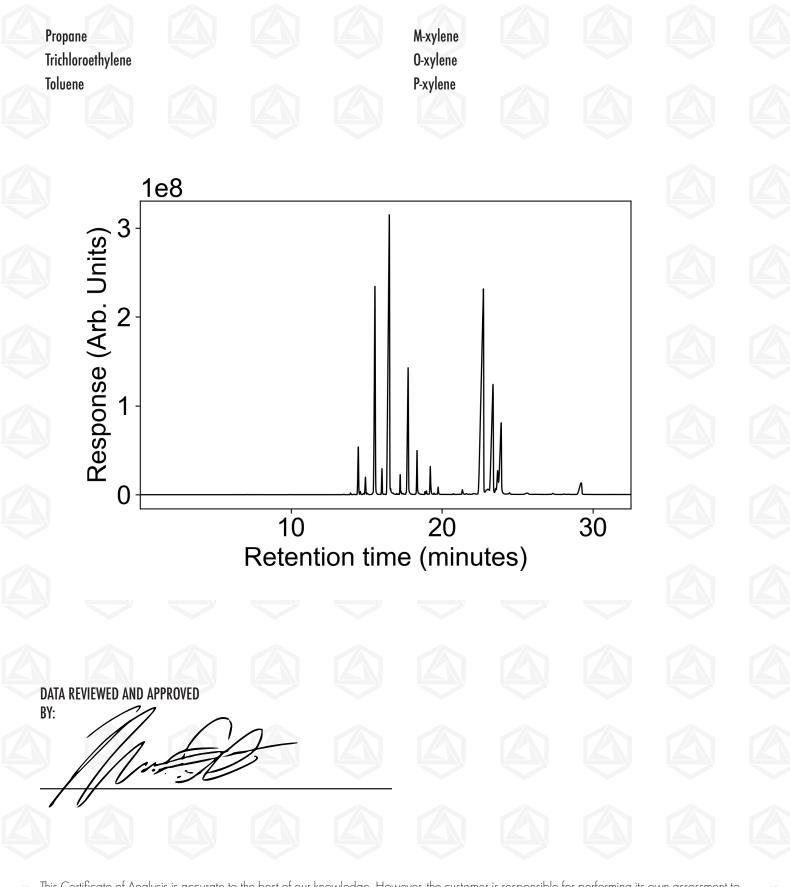

This Certificate of Analysis is accurate to the best of our knowledge. However, the customer is responsible for performing its own assessment to ensure that the material is suitable for its intended applications, including compliance with all pertinent legal requirements. The expected shelf life is calculated from the original manufacture date and is based on unopened containers stored under proper conditions. Once containers have been opened, maintaining minimal headspace and storing under appropriate conditions will aid in preserving the product's integrity.