

m o o o i

Filigree Floor Lamp

RICK TEGELAAR



“What distinguishes a lamp from a light source?” is the question that initially triggered Rick Tegelaar to imagine and create the Filigree Floorlamp. Thanks to an elegant and dainty network of fine wires, that reminds us of delicate filigree jewelry, the translucent screen protecting the powerful LED light at the heart of the lamp is held under tension, distributing a soft light glow evenly across the room. When pointed towards a wall or ceiling, with the ornamental filigree flower structure facing us, the lamp projects a playful network of shadows to mesmerize and entertain.


Colours



White with metal

Filigree Floor Lamp / Filigree

Dimensions

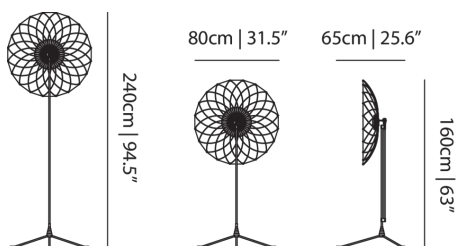

Product

WIDTH 80cm | 31.5"

HEIGHT 240cm | 94.5"

DEPTH 65cm | 25.6"

WEIGHT NETTO 17kg | 37.48lbs

Packaging

WIDTH 87cm | 34.3"

HEIGHT 172cm | 67.7"

CUBAGE 1.03m³ | 36.46ft³

LENGTH 69cm | 27.2"

WEIGHT 19kg | 41.89lbs

Technical CE

MATERIAL

PP translucent, brass, stainless steel, aluminium

ENERGY LABEL

Energy Label A

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

220-240

MAX POWER CONSUMPTION

40W

LIFETIME

50000 hours

PLUG TYPE

Europlug (Type-C)

SWITCH

Integrated rotary dimmer with on/off switch

CRI

80

DIMMING & LIGHTING CONTROL

Dimmer on power cord

LIGHTSOURCE TYPE

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

300cm | 118.1"

COLOUR TEMPERATURE

2700 K

LIGHT OUTPUT

3346 lm

See last page for more information about the dimming possibilities.



Technical cULus

MATERIAL

PP translucent, brass, stainless steel, aluminium

ENERGY LABEL

Energy Label A

LIGHTSOURCE INCLUDED

Yes

INPUT VOLTAGE

90-130

MAX POWER CONSUMPTION

40W

LIFETIME

50000 hours

PLUG TYPE

US plug (Type A)

SWITCH

Integrated rotary dimmer with on/off switch

CRI

80

DIMMING & LIGHTING CONTROL

Dimmer on power cord

See last page for more information about the dimming possibilities.

**LIGHTSOURCE TYPE**

LED

NUMBER OF LIGHTSOURCES

1

FREQUENCY

50/60

LAMPHOLDER

LED (Solid state)

CABLE COLOUR

Transparent with tinned cores

CABLE LENGTH

300cm | 118.1"

COLOUR TEMPERATURE

2700 K

LIGHT OUTPUT

3346 lm

Dimming & Lighting Control

Dimmer on power cord

Compatible models: Filigree CE, Filigree cULus
