

# PALMA

Design by Antoni Arola.

# VIBIA

## Reference

**3720.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Vibia presents a pendant lamp. It includes two sizes of hand blown glass sphere joined together by a strap and aluminum structures. The intensity of the LED light source is dimmable.

## Diffuser

Mat opal triplex blown-glass diffuser

## Materials

Profile: Aluminum

Diffuser: Blown-glass

## Finish




**3720-18** Matt graphite lacquer (ADAPTA RF 9913 WX)



**3720-93** Matt white lacquer (RAL 9016)

## Sketch



## Electrical characteristics



**Led** 2700K CRI >90 868 lm 93 lm/W

**Fixture:** 576.51 lm 49.57 lm/W

**Driver included:** CC - Constant Current 500 mA 110-240V 50/60Hz

**Electronic dimming** 1-10V PUSH

**ficha.fichatecnicaproducto.regulacion.opcional DALI**

## Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.0460 m<sup>3</sup> /

Gross weight 4.0 kg. / Net weight 2.8 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 1

Coordinate system : CG

Total flux : 576.51 lm

Maximum value : 67.81 cd/klm

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Isolux (Floor)

Light position :

X=0.00m Y=0.00m Z=2.50m

## Certificates



# PALMA

Design by Antoni Arola.

# VIBIA

## Reference

**3724.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Nature takes control of the space. With the pendant lamps the interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions.

## Diffuser

Mat opal triplex blown-glass diffuser

## Materials

Profile: Aluminum

Diffuser: Blown-glass

Flowerpot: PMMA (thermoplastic polymer)

## Finish




**3724-18** Matt graphite lacquer (ADAPTA RF 9913 WX)



**3724-93** Matt white lacquer (RAL 9016)

## Sketch



**Led** 2700K CRI >90 868 lm 93 lm/W

**Fixture:** 576.51 lm 49.57 lm/W

**Driver included:** CC - Constant Current 500 mA 110-240V 50/60Hz

**Electronic dimming** 1-10V PUSH

**ficha.fichatecnicaproducto.regulacion.opcional DALI**

## Technical characteristics

- Plants not included

## Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.0761 m<sup>3</sup> /

Gross weight 5.2 kg. / Net weight 3.4 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 1

Isolux : Isolux (Floor)

Coordinate system : CG

Light position :

Total flux : 576.51 lm

X=0.00m Y=0.00m Z=2.50m

Maximum value : 67.81 cd/klm

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

## Certificates



## Electrical characteristics



# PALMA

Design by Antoni Arola.

## Reference

**3726.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Pendant lamp. The effect of floating through its multiple configurations thanks to the almost imperceptible suspension and unique cable system and the hoops that wrap the spheres.

## Diffuser

Mat opal triplex blown-glass diffuser

## Materials

Profile: Aluminum

Diffuser: Blown-glass

## Finish




**3726-18** Matt graphite lacquer (ADAPTA RF 9913 WX)



**3726-93** Matt white lacquer (RAL 9016)

## Sketch



## Electrical characteristics



**Led** 2700K CRI >90 1736 lm 93 lm/W

**Fixture:** 1153.01 lm 49.57 lm/W

**Driver included:** CC - Constant Current 500 mA 110-240V 50/60Hz

**Electronic dimming** 1-10V PUSH

**ficha.fichatecnicaproducto.regulacion.opcional DALI**

## Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.0725 m<sup>3</sup> /

Gross weight 6.4 kg. / Net weight 4.4 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 1

Coordinate system : CG

Total flux : 1153.01 lm

Maximum value : 67.81 cd/klm

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Isolux (Floor)

Light position :

X=0.00m Y=0.00m Z=2.50m

## Certificates



# PALMA

Design by Antoni Arola.

## Reference

**3728.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Nature takes control of the space. With the pendant lamps the interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions.

## Diffuser

Mat opal triplex blown-glass diffuser

## Materials

Profile: Aluminum

Diffuser: Blown-glass

Flowerpot: PMMA (thermoplastic polymer)

## Finish




**3728-18** Matt graphite lacquer (ADAPTA RF 9913 WX)



**3728-93** Matt white lacquer (RAL 9016)

## Sketch



## Electrical characteristics



**Led** 2700K CRI >90 1736 lm 93 lm/W

**Fixture:** 1153.01 lm 49.57 lm/W

**Driver included:** CC - Constant Current 500 mA 110-240V 50/60Hz

**Electronic dimming** 1-10V PUSH

**ficha.fichatecnicaproducto.regulacion.opcional DALI**

## Technical characteristics

- Plants not included

## Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.1136 m<sup>3</sup> /

Gross weight 7.0 kg. / Net weight 4.8 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 1

Isolux : Isolux (Floor)

Coordinate system : CG

Light position :

Total flux : 1153.01 lm

X=0.00m Y=0.00m Z=2.50m

Maximum value : 67.81 cd/klm

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

## Certificates



# PALMA

Design by Antoni Arola.

## Reference

**3730.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Pendant lamp. The effect of floating through its multiple configurations thanks to the almost imperceptible suspension and unique cable system and the hoops that wrap the spheres.

## Diffuser

Mat opal triplex blown-glass diffuser

## Materials

Profile: Aluminum

Diffuser: Blown-glass

## Finish




**3730-18** Matt graphite lacquer (ADAPTA RF 9913 WX)



**3730-93** Matt white lacquer (RAL 9016)

## Sketch

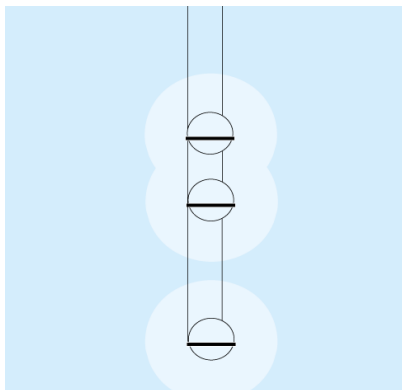

## Electrical characteristics



**Led** 2700K CRI >90 2604 lm 93 lm/W

**Fixture:** 1729.52 lm 49.57 lm/W

**Driver included:** CC - Constant Current 500 mA 110-240V 50/60Hz

**Electronic dimming** DALI 1-10V PUSH

## Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.1205 m<sup>3</sup> /

Gross weight 9.1 kg. / Net weight 6.1 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 1

Coordinate system : CG

Total flux : 1729.52 lm

Maximum value : 67.81 cd/klm

Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Isolux (Floor)

Light position :

X=0.00m Y=0.00m Z=2.50m

## Certificates



# PALMA

Design by Antoni Arola.

# VIBIA

## Reference

**3734.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Nature takes control of the space. With the pendant lamps the interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions.

## Diffuser

Mat opal triplex blown-glass diffuser

## Materials

Profile: Aluminum

Diffuser: Blown-glass

Flowerpot: PMMA (thermoplastic polymer)

## Finish




**3734-18** Matt graphite lacquer (ADAPTA RF 9913 WX)



**3734-93** Matt white lacquer (RAL 9016)

## Sketch



**Led** 2700K CRI >90 1829 lm 84 lm/W

**Fixture:** 1301.84 lm 51.54 lm/W

**Driver included:** CC - Constant Current 500 mA 110-240V 50/60Hz

**Electronic dimming** DALI 1-10V PUSH

## Technical characteristics

- Plants not included

## Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.1790 m<sup>3</sup> /

Gross weight 9.5 kg. / Net weight 6.0 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 1

Isolux : Isolux (Floor)

Coordinate system : CG

Light position :

Total flux : 1301.84 lm

X=0.00m Y=0.00m Z=2.50m

Maximum value : 66.04 cd/klm

Light position : C=0.00 G=1.00

Symmetry on the planes : Asymmetric

## Certificates



## Electrical characteristics



# PALMA

Design by Antoni Arola.

# VIBIA

## Reference

**3736.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Nature takes control of the space. With the pendant lamps the interior ambience takes on a life of its own with the possibility of integrating plants with the lighting compositions.

## Diffuser

Mat opal triplex blown-glass diffuser

## Materials

Profile: Aluminum

Diffuser: Blown-glass

Flowerpot: PMMA (thermoplastic polymer)

## Finish




**3736-18** Matt graphite lacquer (ADAPTA RF 9913 WX)



**3736-93** Matt white lacquer (RAL 9016)

## Sketch



**Led** 2700K CRI >90 2730 lm 84 lm/W

**Fixture:** 1912.81 lm 54.82 lm/W

**Driver included:** CC - Constant Current 500 mA 110-240V 50/60Hz

**Electronic dimming** DALI 1-10V PUSH

## Technical characteristics

- Plants not included

## Physical characteristics

1 Box / 0.00 x 0.00 x 0.00 m. / Vol. 0.2219 m<sup>3</sup> /

Gross weight 12.3 kg. / Net weight 8.2 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### General lighting

Lamp for general lighting that equally distributes the light in all directions.



## Photometric data

Efficiency : 1

Coordinate system : CG

Total flux : 1912.81 lm

Maximum value : 65.09 cd/klm

Light position : C=0.00 G=1.00

Symmetry on the planes : Asymmetric

Isolux : Isolux (Floor)

Light position :

X=0.00m Y=0.00m Z=2.50m

## Certificates



## Electrical characteristics

1 x LED 2W 500mA

Total 2.0 W

