

ALMA

VERT



**Highly efficient
thermal break**




**Excellent
mechanical strength**



**High compressive
strength**



**Permeable to water
vapor diffusion**



**Excellent thermal
conductivity /
R-value**




**Lightweight
composite
structure**



**Low water
absorption**



**Environmentally-friendly
core material
(100% recyclable)**

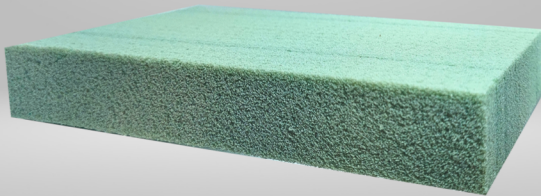

All data and technical information provided are based on results achieved under specific conditions defined according to the referenced testing standards. Despite taking every precaution to ensure the accuracy and completeness of this data and technical information, Partel makes no representation or warranty, express or implied, regarding its accuracy, content, or completeness. Partel also assumes no liability for any person's use of this data or technical information. Partel reserves the right to revoke, modify, or amend this document at any time. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute, nor is it part of, a legal offer to sell or to contract.

At Partel, we value your trust, and we want to ensure transparency about the information we collect and why we collect it. To learn more about how we process your data, please refer to our Data Protection Policy.

© Partel, 2024. All rights reserved. ® is a trademark of the Partel Group.




STRENGTH, INSULATION, PROTECTION

MATERIAL COMPLIANT WITH NEW ENERGY CODES

This raw material comprises production waste sourced from PET bottles. After the product reaches the end of its lifecycle, it can undergo recycling for reuse once more. Numerous tests have confirmed that the material is free of emissions during installation and later use. ALMA VERT meets all the conditions required to be installed in low-energy building projects.

LOWEST CO² EMISSION PROCESS TECHNOLOGY

100% recycled PET bottles are used as the base raw material, CO₂ emissions are significantly reduced and satisfies industry standards for the design of recyclable, lightweight, and long-lasting composite structures.

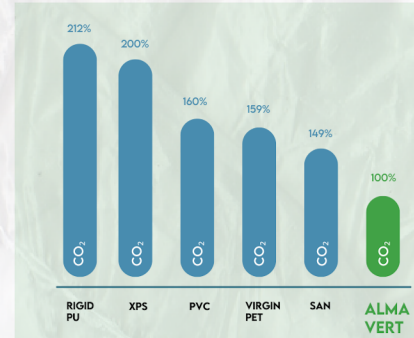

PANEL DENSITY			GR115	GR200	GR350
DENSITY	ISO 845	kg/m ³	115	200	350
		lb/ft ³	7.2	12.5	20.0
COMPRESSION STRENGTH	ISO 844	MPa	1.8	4.0	7.0
		psi	260	580	1015
COMPRESSION MODULUS	ISO 844	MPa	175	230	320
		psi	25'380	33'360	46'410
SHEAR STRENGTH	ISO 1922	MPa	0.95	1.75	2.1
		psi	140	255	305
SHEAR MODULUS	ISO 1922	MPa	26	51	90
		psi	3'770	7'395	13'050
SHEAR STRAIN	ISO 1922	%	10	5	2
TENSILE STRENGTH	ASTM C 297	MPa	2.9	3.9	4.8
		psi	420	565	695
TENSILE MODULUS	ASTM C 297	MPa	140	235	350
		psi	20'300	34'075	50'750
THERMAL CONDUCTIVITY	AT 23°C AT 73.4°F	W/(m·K)	0.034	0.043	tbd
		BTU.in/ FT ² .hr.°F	0.236	0.298	tbd
REACTION TO FIRE	EN 13501-1	Class	E (6)	E (6)	E (6)

STANDARD DIMENSIONS

***1220 X 1005 X 50MM**

4' X 3'4" X 2"

***1220 X 1005 X 75MM**

4' X 3'4" X 3"

FIELDS OF APPLICATION

- Internal and external use
- Thermal separation
- Thermal bridge - free installation of all building elements, according to DIN4108

*Other dimensions are available upon request

CHOOSE THE RIGHT PANEL

- ALMA VERT is manufactured in 3 different density classes:

- 115 kg/m³,
- 200 kg/m³
- 350kg/m³

IRL & EU

WWW.PARTEL.IE
SALES@PARTEL.IE
TEL: +353 (0)91 428 714

UK

WWW.PARTEL.CO.UK
SALES@PARTEL.CO.UK
TEL: 02037 401918

NORTH AMERICA

WWW.PARTEL.COM
SALES@PARTEL.COM
TEL: 888 487 1012

