


# H2OPro Smart Wi-Fi Sprinkler Timer With EPA WaterSense® Mode



## Case Dimensions:

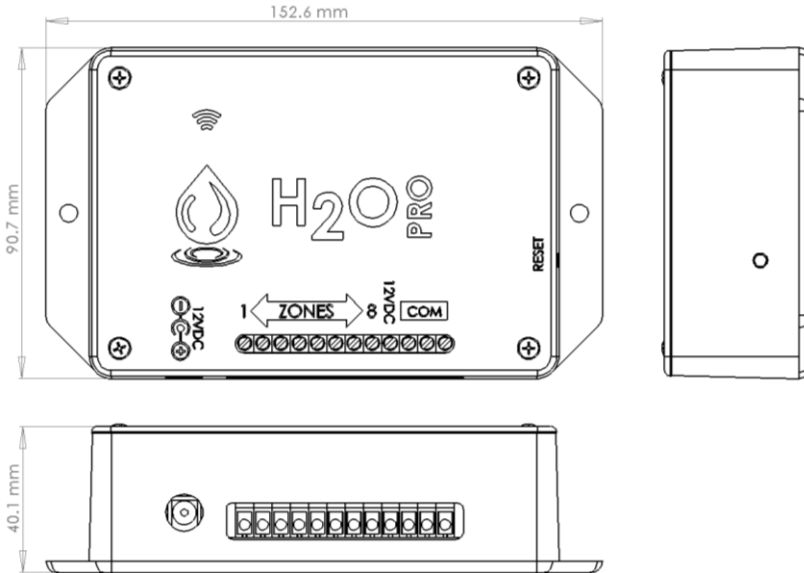

## Case Specifications:

Case Material	Flame Retardant ABS POLYLAC® PA-765 Acrylonitrile Butadiene Styrene
Case Material Flame Rating	UL94V-0

## Electrical Specifications:

Model Number	HA-1060-8
Zones	8
Watering Schedules	Up to 5 schedules with programmed times or automatic WaterSense® mode
Power Supply	15V DC 1.6A , AC/DC Wall Mount Adapter
Power Supply Connector	Barrel Connector 2.00mm ID (0.079"), 5.50mm OD (0.217")
Internal Fuse	2.0 A
Valve and Flow Sensors Connections	Screw Terminal
Solenoid Types	24VAC and 12-24VDC
Maximum Solenoid Valve Voltage Output	15.0 VDC
Maximum Solenoid Valve Current Output	0.5 A
Minimum Solenoid DC resistance	10 Ohm
Power Dissipation	Valve On: 2.5 Watt, Valve Off: 1.2 Watt
WiFi Tx Power	<ul style="list-style-type: none"> <li>• 17 dBm at 1 DSSS</li> <li>• 17.25 dBm at 11 CCK</li> <li>• 13.5 dBm at 54 OFDM</li> </ul>
WiFi Rx Sensitivity	<ul style="list-style-type: none"> <li>• -94.7 dBm at 1 DSSS</li> <li>• -87 dBm at 11 CCK</li> <li>• -73 dBm at 54 OFDM</li> </ul>