

# RotopaX Mount Installation




## NOTE!

If you have a roof rack installed you will need to lift the rear foot to slide in the track mount.




Drop roof track mount in place.


Remove rear ditch finisher.

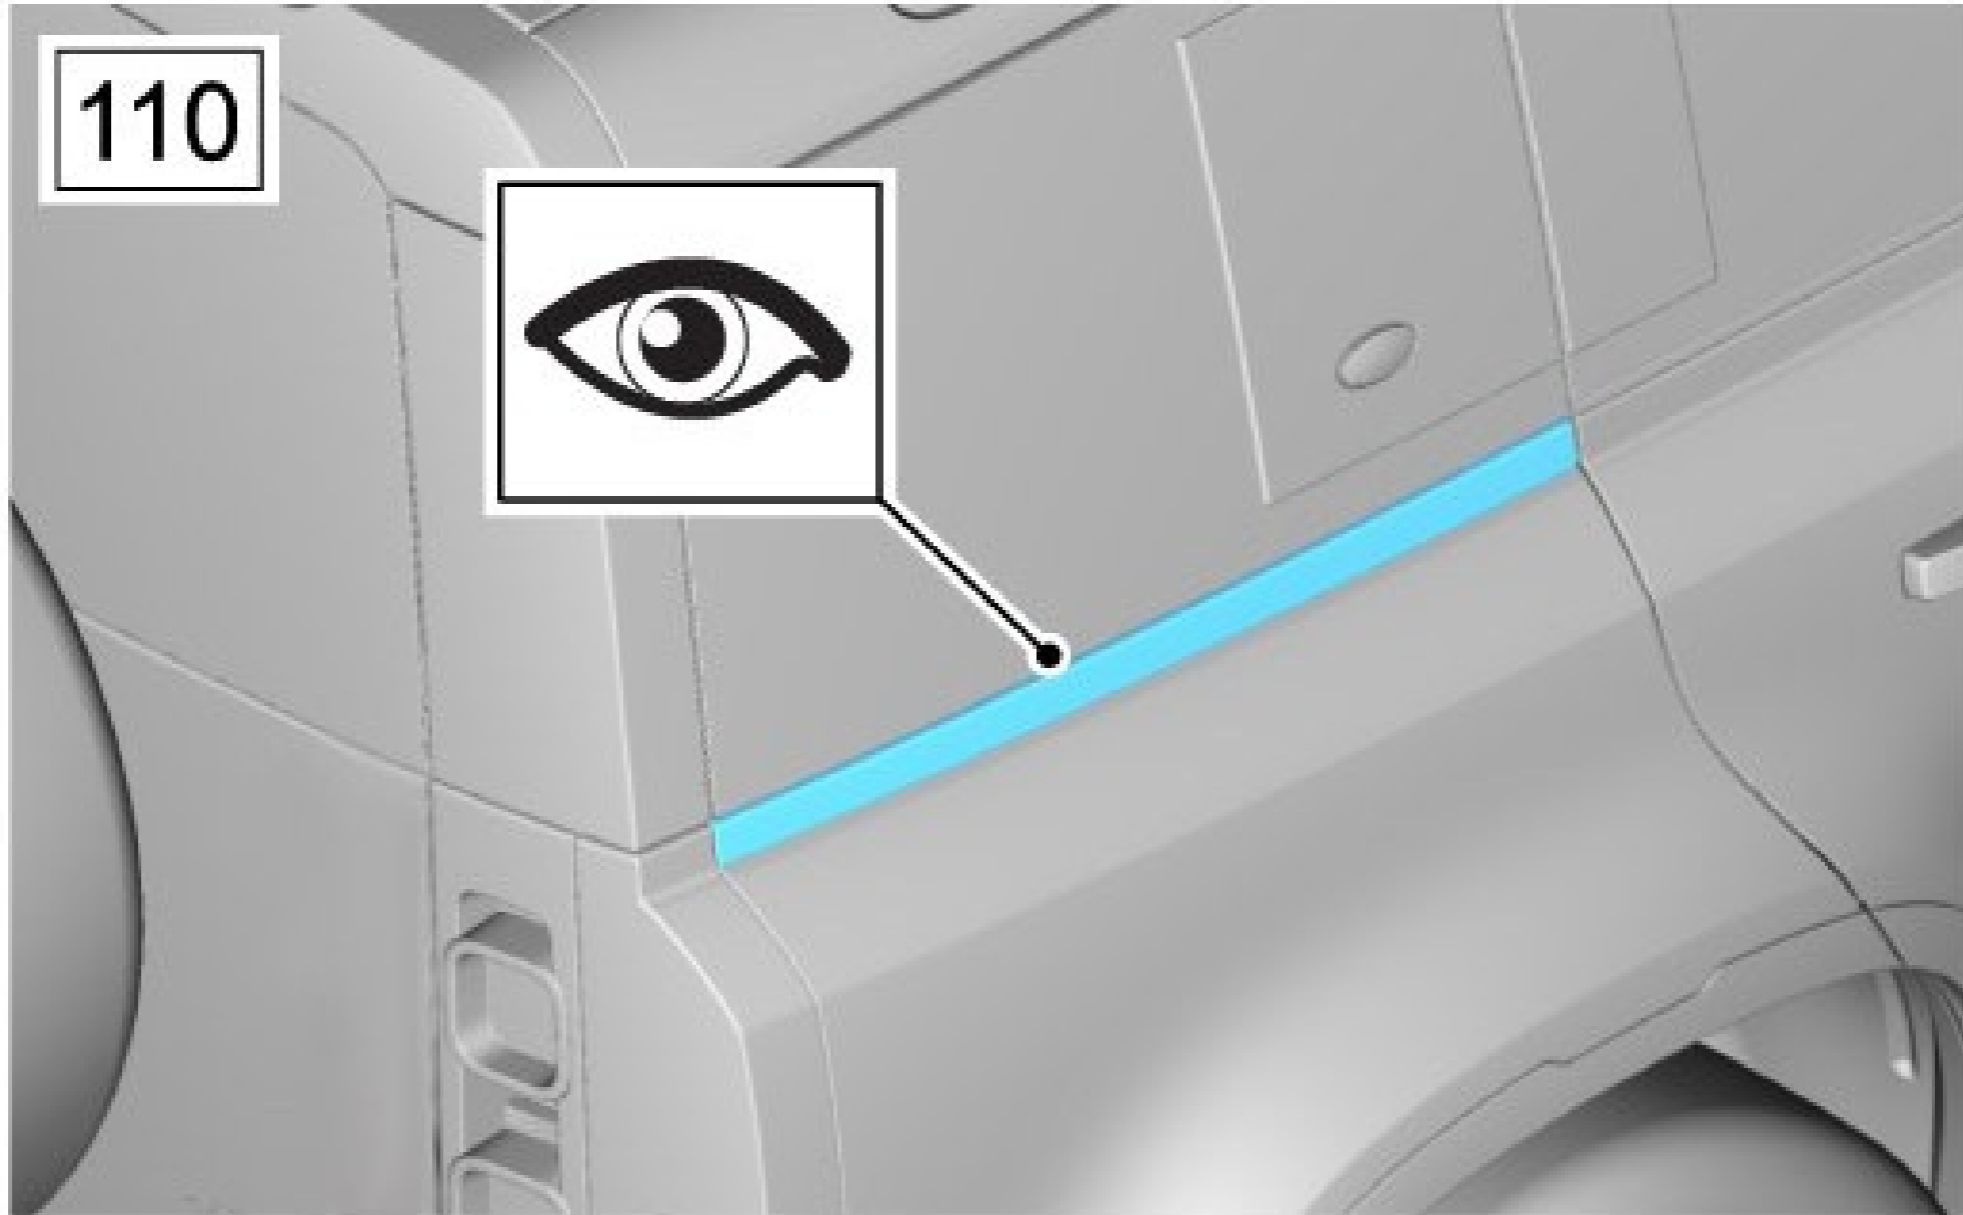

Mark the ditch finisher as shown and  
aa drill a  $\frac{3}{4}$ " hole in both locations.

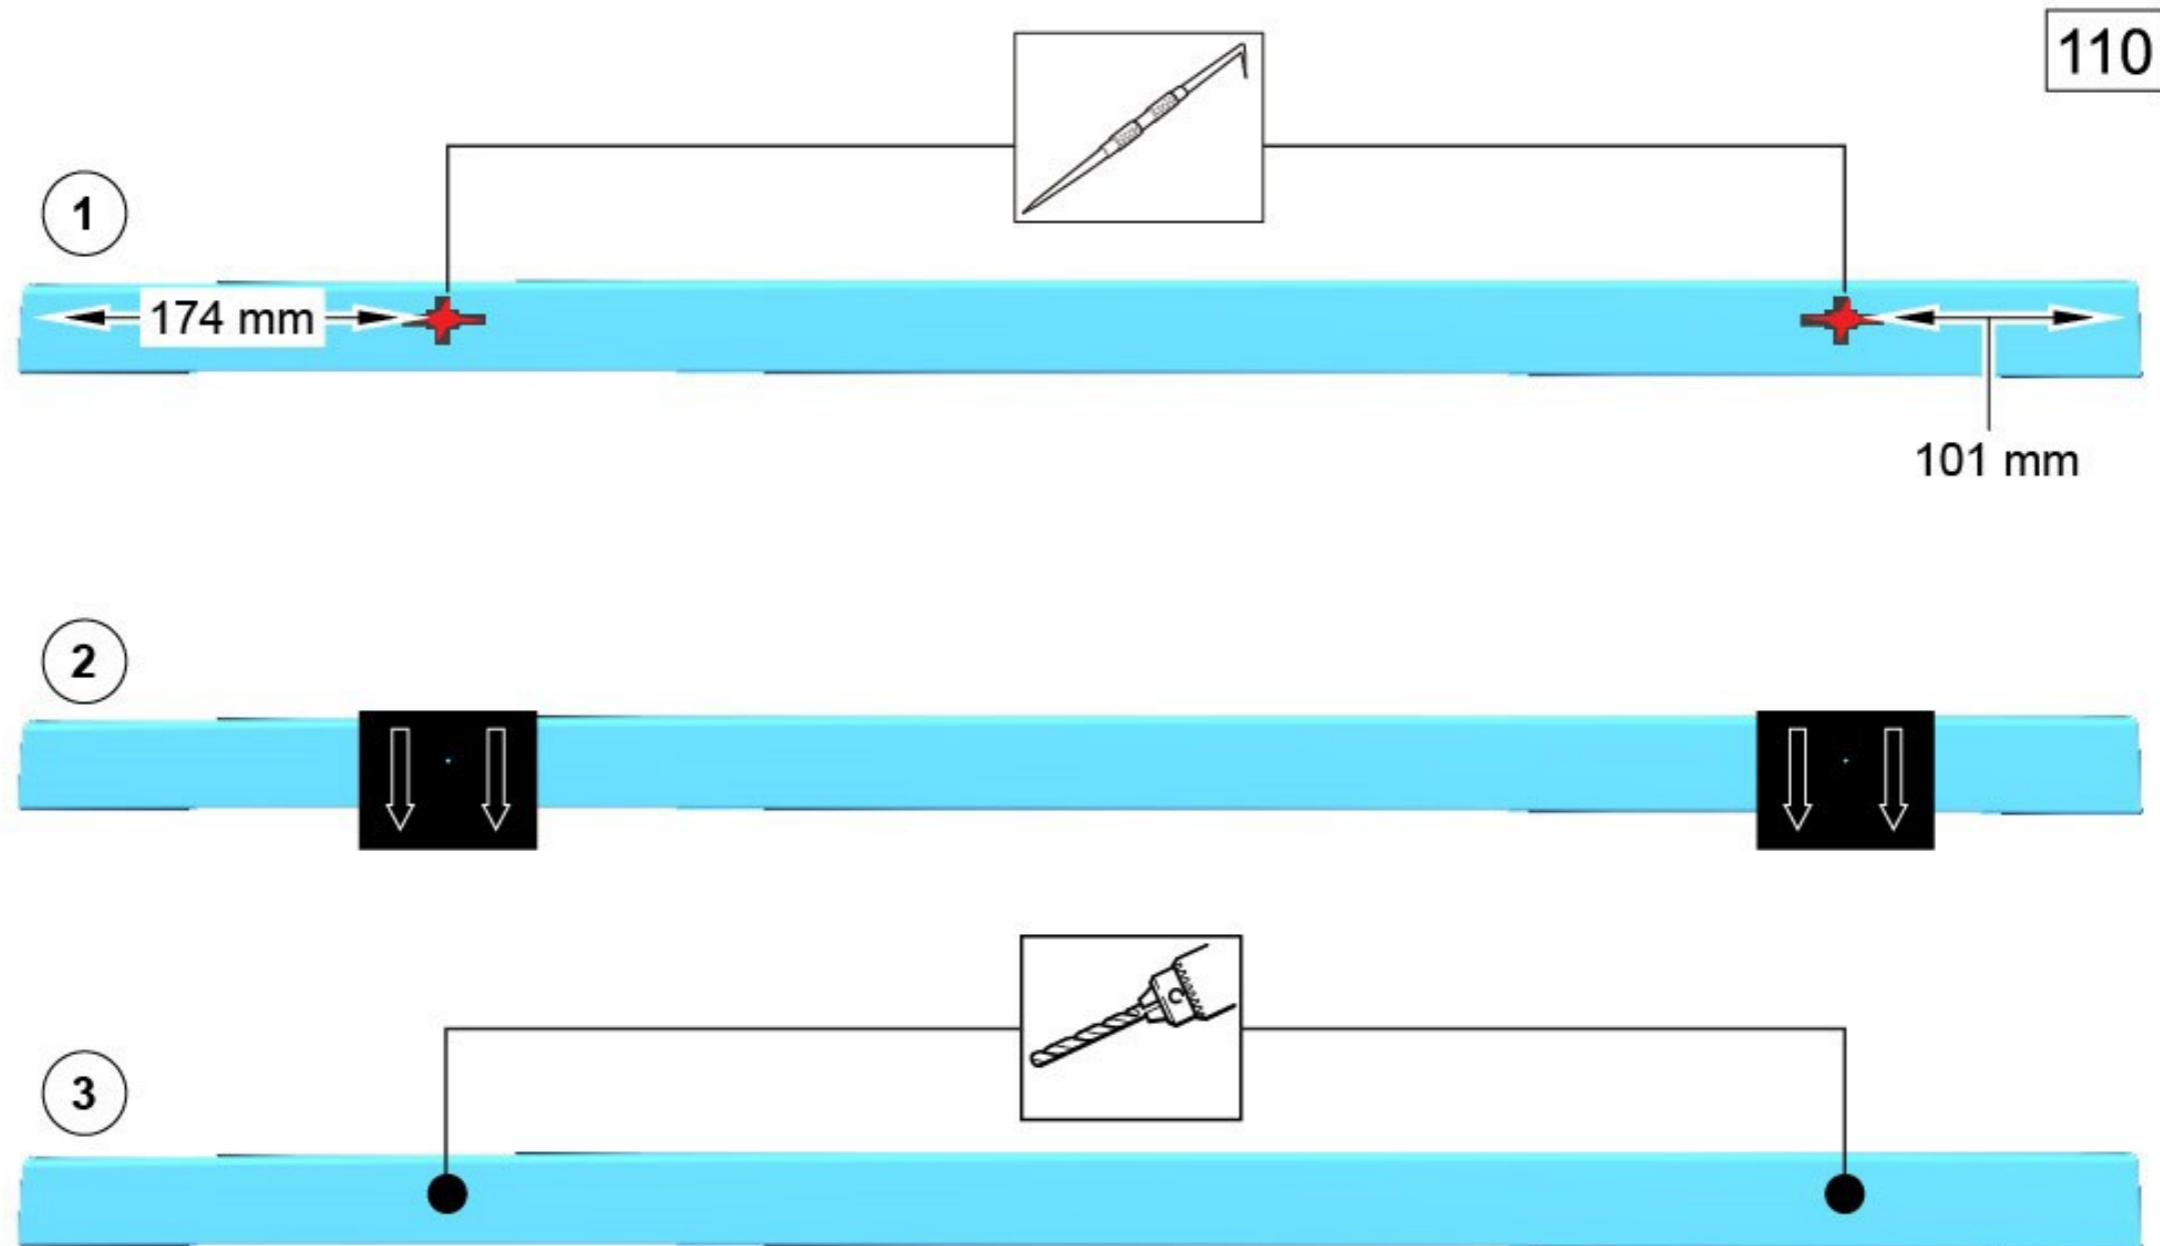

Mount the Rotopax twist mount to the sport bracket with the hardware supplied in the Rotopax box

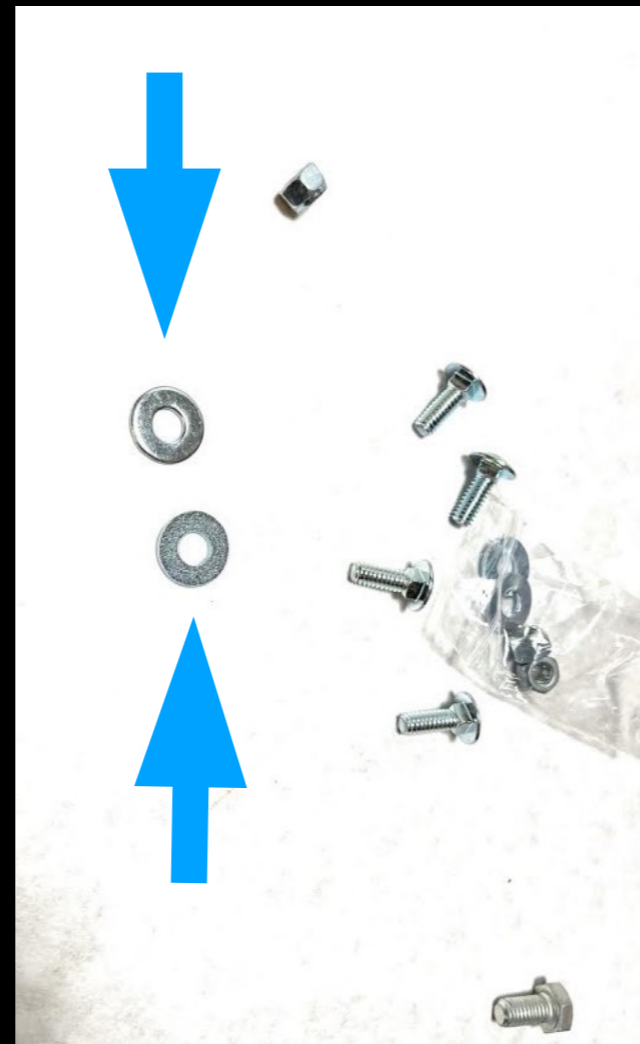



The Rotopax mount should look like this mounted to the front of the support bracket



Reinstall the ditch finisher and confirm your holes line up.



Loosely install the top two bolts into the track mount.





Install the black in spacers in to the  $\frac{3}{4}$ " holes as shown in sliver.



Put thread sealer on the two m10 bolts.



Align the mounting bracket and the holes in the ditch finisher. Install the two m10 bolts and washers as shown.





Tighten everything down, mount the RotopaX and your finished product should look like this.

