

# TL-MULTI4-8W

4" THINLED Multi PRO, CCT Selectable



## Features

### Body

Durable airtight plastic body with mounting holes and included butterfly clips. On-face magnets allows for securely attaching one of three included dead front magnetic faceplates (Black, Silver and White).

### LED Characteristics

This general application light fixture features a 8 watt LED module that maintains intensity producing up to 560 lumens; with a typical CRI of 90. Available with 5 step CCT switch (2700 K, 3000 K, 3500 K, 4000 K, 5000 K).

### Dimming

100%-10% dimming capability. This fixture is compatible with industry standard forward/reverse phase dimmers, TRIAC/ELV dimmers (contact factory for listing of compatible dimmers).

### Beam Spread

The fixture lens provides 110° beam spread.

### Mounting

Can be mounted to a compatible 4" recessed housing via included butterfly clips, or attached to an industry standard 4" octagon box with minimum depth of 1.5" (40mm) via mounting holes.

### LED Driver

Built-in on board driver with 40mA output and 100-135V AC input.

### Quick Connect Push-in Terminals

"Quick Connect" push-in terminals for fast and easy wiring.

### Operating Temperature

-30°C~40°C (-22°F~104°F).

### Environment


Suitable for wet locations.  
Fire-rated when used in a fire-rated octagon box.

## Description

An 8 watt 4" round downlight for retrofit application onto existing 4" recessed housings or 4" octagon box. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy-efficiency and streamlined design. Suitable for wet locations.

TECHNICAL DATA	
Application	Ceiling Recess Mount / Flushmount
Approved Location	Wet
Beam Angle	110°
CCT	2700 K / 3000 K / 3500 K / 4000 K / 5000 K (via CCT switch)
Certification	cETLus
Color	Black / Silver / White
CRI	90
Dimming	Yes
Dimming Technology	Forward/Reverse phase / TRIAC / ELV
Input	100-135V AC, 60 Hz
Lumens	Up to 560
Lumens per Watt	Up to 70
Power Factor	>0.9
Projected Lumen Maintenance	70% @ 50,000 hours
Warranty	Lifetime
Wattage	8W

**Notes:** Due to our continued efforts to improve our products, product specifications are subject to change without notice.

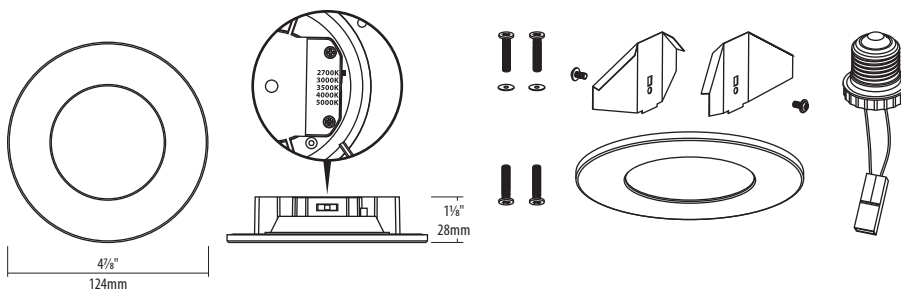

A division of  
Une division de

LITELINE CORPORATION  
P 416-996-1856 | 1-866-730-7704  
F 905-709-5255 | 1-888-738-9736