


TL-MULTI6-13W

6" THINLED MULTI PRO, CCT Selectable

TRENTZ™
LIGHTING

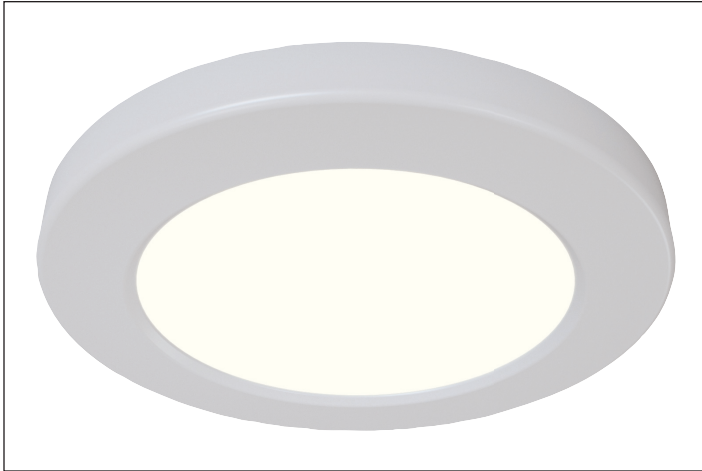

Description

A 13 watt 6" round downlight for retrofit application onto existing 3.5"/4" octagon box or a 6" recessed housing. It is a high-performance, easy to install residential grade downlight solution that offers good light output, energy-efficiency and streamlined design. Suitable for wet locations and fire-rated applications.

TECHNICAL DATA	
Application	Ceiling Recess Mount / Flushmount
Approved Location	Wet
Beam Angle	110°
CCT	2700 K / 3000 K / 3500 K / 4000 K / 5000 K (via CCT switch)
Certification	cETLus
Color	White
CRI	90
Dimming	Yes
Dimming Technology	Forward/Reverse phase / TRIAC / ELV
Input	120V AC, 60 Hz
Lumens	Up to 1070
Lumens per Watt	Up to 83
Power Factor	>0.9
Projected Lumen Maintenance	70% @ 50,000 hours
Warranty	5-Year
Wattage	13W

Notes: Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Features

Body

Durable airtight aluminum body with twist-and-lock trim that allows for ease and versatility. White trim included, black and brushed nickel trims sold separately.

LED Characteristics

This general application light fixture features a 13 watt LED module that maintains intensity producing up to 1070 lumens; with a typical CRI of 90. Available with 5 step CCT select switch (2700 K, 3000 K, 3500 K, 4000 K, 5000 K).

Dimming

100%-10% dimming capability. This fixture is compatible with industry standard forward/reverse phase dimmers, TRIAC/ELV dimmers (contact factory for listing of compatible dimmers).

Beam Spread

The fixture lens provides 110° beam spread.

Mounting

Can be mounted to an industry standard 3.5"/4" octagon box with minimum depth of 1.5" (40mm) via mounting holes or a compatible 6" recessed housing.

LED Driver

Built-in on board driver with 120V AC input.

Quick Connect Push-in Terminals




"Quick Connect" push-in terminals for fast and easy wiring.

Operating Temperature

-30°C~40°C (-22°F~104°F).

Environment

Suitable for wet locations.
Fire-rated when used in a fire-rated octagon box.
Indoor/Outdoor rated.

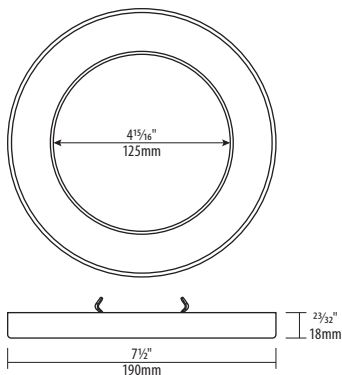

Accessories



TL-MULTI6-RT-BK
Optional trim for 6" MULTI PRO, Black.



TL-MULTI6-RT-BN
Optional trim for 6" MULTI PRO, Brushed Nickel.



A division of
Une division de

LITELINE CORPORATION
P 416-996-1856 | 1-866-730-7704
F 905-709-5255 | 1-888-738-9736

Copyright © 2023, Liteline Corporation. All rights reserved.