


# TL-SLM6-RGBTW

## 6" THINLED PRO, RGB + TUNABLE WHITE

TRENZ  
LIGHTING

WIZ  
CONNECTED

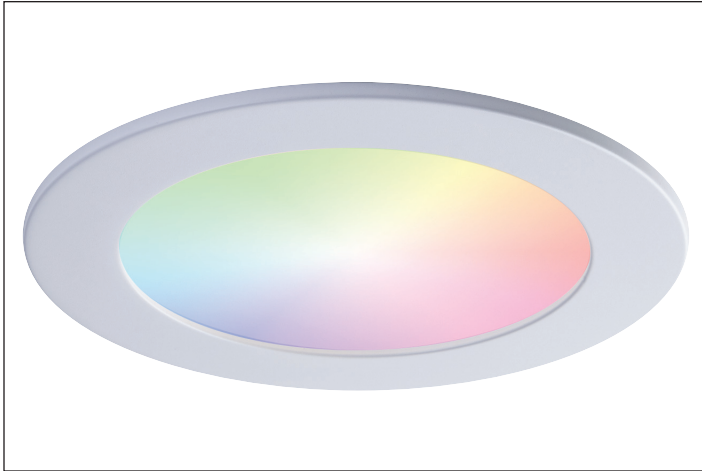

### Features

#### Body

Durable airtight aluminum body with UV stable paint and white PMMA diffuser lens for low glare. Includes silicone gasket for wet location applications. Interchangeable magnetic trim.

#### LED Characteristics

This general application light fixture features a 16 watt LED module that maintains intensity producing up to 1200 lumens; with a typical CRI of 90. The LED module provides tunable white (2700 K ~ 5000 K) and RGB (Red / Green / Blue) illumination.

#### Dimming

100%-4% Wi-Fi dimming capability. Dimming controlled via the WiZ App and Room Controller.

#### Beam Spread

The fixture lens provides 110° beam spread.

#### Mounting

Includes two spring loaded clips to attach to any ceiling material. The slim profile allows to be mounted under joists or duct work.

#### LED Driver

Extruded aluminum hardwire box with 370mA Wi-Fi dimmable LED driver with 100-135V AC input. Includes an 18" wire with 6-Pin DC connector from driver to fixture.

#### WiZ App

Can be controlled via the WiZ App (works with iOS and Android) from anywhere. Voice control can also be achieved by integrating the app with most smart speakers. Works with Google Assistant, Siri, Alexa and IFTTT.

#### Quick Connect Push-in Terminals

Three "Quick Connect" push-in terminals for fast and easy wiring.

#### Minimum Starting Temperature

-40°C (-40°F)

#### Environment

Suitable for wet locations.  
Suitable for indoor/outdoor applications.  
Suitable for direct contact with insulation.


### Description

6" Slim profile light fixture for recess retrofit applications in wet locations. It is a high performance, easy to install residential grade downlight solution that offers good light output, energy-efficient and streamlined design with interchangeable color trims. Suitable for wet locations.

#### TECHNICAL DATA

Application	Ceiling Recess Mount
Approved Location	Wet / Insulated Ceiling / Indoor/Outdoor
Beam Angle	110°
Certification	cETLus
Class II	Yes
Color	White (other accessory colors available)
CRI	90
Dimming	Yes
Dimming Technology	Wi-Fi dimming (via WiZ App)
Input	100-135V AC, 60 Hz
Light Output	Tunable White (2700 K ~ 5000 K) / Red / Green / Blue
Lumens	Up to 1200
Lumens per Watt	Up to 76
Power Factor	>0.9
Projected Lumen Maintenance	70% @ 50,000 hours
Warranty	3-Year
Wattage	16W

**Notes:** Due to our continued efforts to improve our products, product specifications are subject to change without notice.

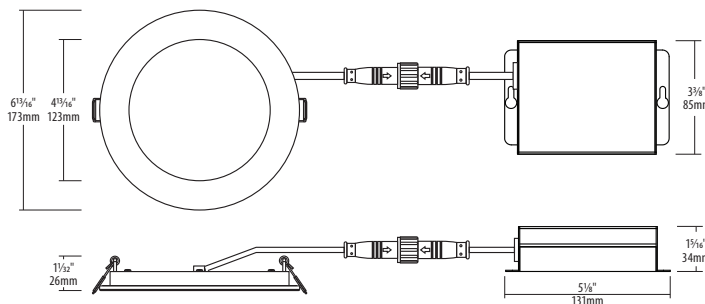

### Accessories



**TL-SLM6-RT-BK**  
Black round faceplate.



**TL-SLM6-RT-BN**  
Brushed Nickel round faceplate.



A division of  
Une division de

LITELINE CORPORATION  
P 416-996-1856 | 1-866-730-7704  
F 905-709-5255 | 1-888-738-9736

TRENZLIGHTING.COM