


TL4-9W-CCT5-90

4" THINLED, CCT Selectable

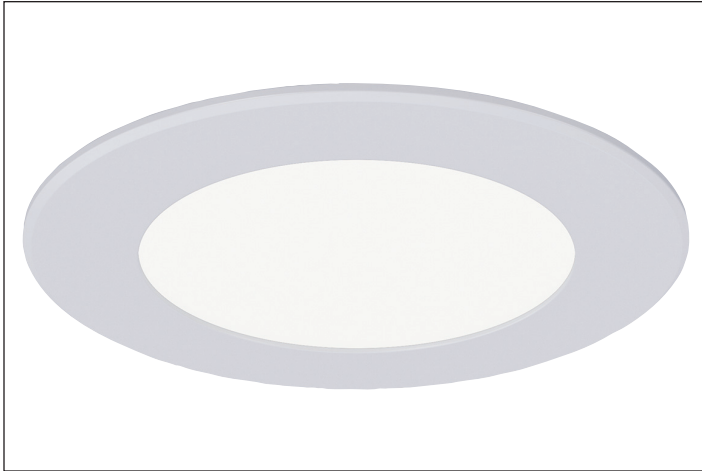

Features

Body

Durable airtight aluminum body with UV stable paint and white PMMA diffuser lens for low glare. Includes silicone gasket for wet location applications.

LED Characteristics

This general application light fixture features a 9 watt LED module that maintains intensity producing up to 680 lumens; with a typical CRI of 90. On-driver color selectable switch allows switching between 2700 K, 3000 K, 3500 K, 4000 K and 5000 K color temperatures.

Dimming

100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers (contact factory for listing of compatible dimmers).

Beam Spread

The fixture lens provides 110° beam spread.

Mounting

Includes two spring loaded clips to attach to any ceiling material.

LED Driver

Extruded aluminum hardwire box with 200mA dimmable class II electronic LED driver with 100-135V AC input. Includes an 18" FT6 rated cable with DC 2.1 connector between driver and fixture approved for use in plenums and suspended ceilings.

Quick Connect Push-in Terminals

Three "Quick Connect" push-in terminals for fast and easy wiring.

Operating Temperature

-30°C~35°C (-22°F~95°F).

Environment


Suitable for wet locations.
Suitable for insulated ceiling applications.
Indoor / Outdoor

Description

A slender, low-profile downlight that not only excels in performance but also makes residential installation a breeze. This downlight solution offers impressive light output, energy efficiency and a modern, streamlined design. Made to excel even in wet environments.

| TECHNICAL DATA | |
|-----------------------------|--|
| Application | Ceiling Recess Mount |
| Approved Location | Wet / Insulated Ceiling |
| Beam Angle | 110° |
| CCT | 2700 K / 3000 K / 3500 K / 4000 K / 5000 K (via on-driver CCT switch) |
| Certification | cETLus |
| Class II | Yes |
| Color | White |
| CRI | 90+ |
| Dimming | Yes |
| Dimming Technology | Forward/reverse-phase / TRIAC / ELV |
| Input | 100-135V AC, 60 Hz |
| Lumens | 680 |
| Lumens per Watt | 77 |
| Power Factor | >0.9 |
| Projected Lumen Maintenance | 70% @ 50,000 hours |
| Warranty | 7 Years |
| Wattage | 9W |

Notes: Due to our continued efforts to improve our products, product specifications are subject to change without notice.

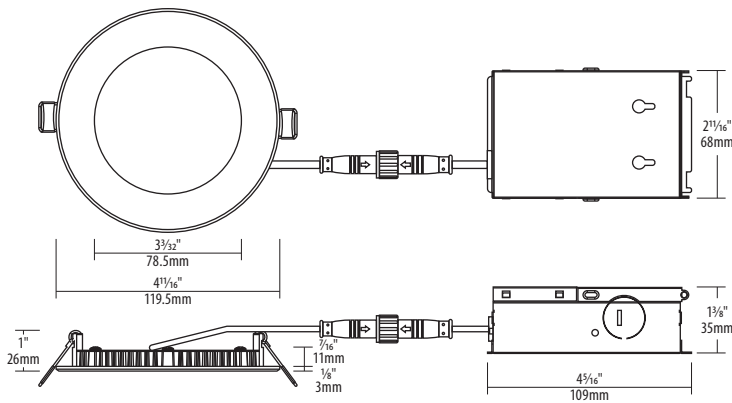

A division of
Une division de

LITELINE CORPORATION
P 416-996-1856 | 1-866-730-7704
F 905-709-5255 | 1-888-738-9736