


TL4P-CCT5-90WH

4" THINLED Basic
Recessed downlight

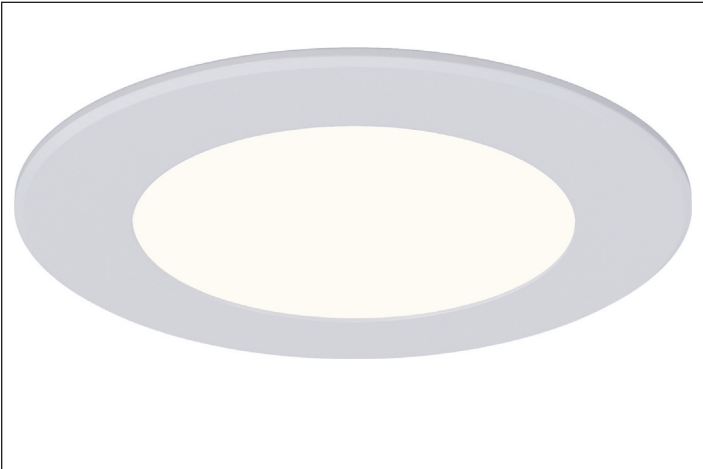

Description

4" slim profile light fixture for recess retrofit applications. It is a high performance, easy to install residential grade downlight solution that offers good light output, energy-efficient and streamlined design. Suitable for wet locations.

TECHNICAL DATA	
Application	Ceiling Recess Mount
Approved Location	Wet / Insulated Ceiling
Beam Angle	100°
CCT	2700 K / 3000 K / 3500 K / 4000 K / 5000 K
Certification	cETLus
Class II	Yes
Colour	White
CRI	90
Dimming	Yes
Dimming Technology	TRIAC/ELV
Input	100-135V AC, 60 Hz, 0.10A
Lumens	800
Lumens per Watt	93
Power Factor	>0.9
Projected Lumen Maintenance	70% @ 50,000 hours
Warranty	Lifetime
Wattage	9W

Notes: Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Features

Body

Durable airtight aluminum body with plastic trim and etched white polycarbonate diffuser lens for low glare.

LED Characteristics

This general application light fixture features a 9 watt LED module that maintains intensity producing up to 800 lumens; with a typical CRI of 90. Available with a color selectable switch 2700 K /3000 K /3500 K /4000 K /5000 K on the driver box.

Dimming

100-10% dimming. This fixture is compatible with industry standard TRIAC/ELV dimmers (contact factory for listing of compatible dimmers).

Beam Spread

The fixture lens provides 100 beam spread.

Mounting

Includes two spring loaded clips to attach to any ceiling material.

LED Driver

Steel hardwire box with 210mA dimmable class II electronic LED driver with 120V AC input.

Quick Connect Push-in Terminals

Three "Quick Connect" push-in terminals for fast and easy wiring.

Operating Temperature


-25°C (77°F) starting temp

Environment

Suitable for wet locations.
Suitable for insulated ceiling applications.

Certifications

cETLus
RoHS
Insulation Contact (IC Rated)
Energy Star
JA8 Title 24
ASTM Air Tight
FCC compliant
ICES-005 compliant

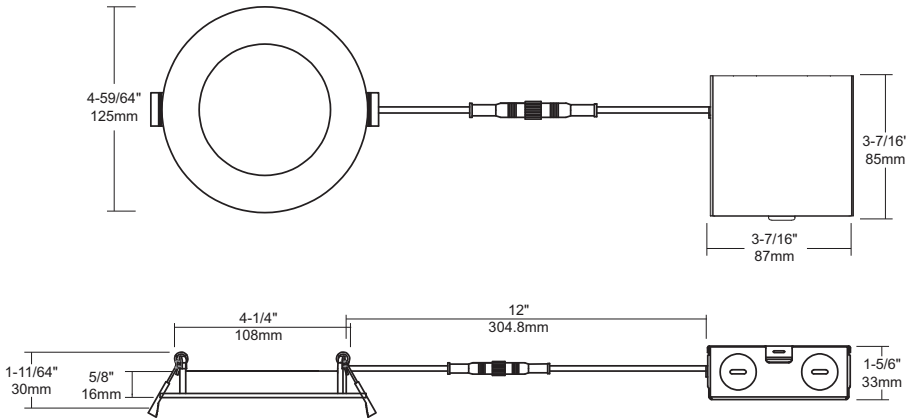

A division of
Une division de

LITELINE CORPORATION
P 416-996-1856 | 1-866-730-7704
F 905-709-5255 | 1-888-738-9736