

Rubiomonocoat OIL PLUS 2C



PROTECTS AND COLOURS YOUR WOOD IN ONE SINGLE LAYER

DESCRIPTION:

Rubio Monocoat Oil Plus 2C is a product of the newest generation which colours your wood and protects it in one layer. The combination of the oil (A) and the accelerator (B) guarantees a quick drying. Can also be applied as renovation and maintenance oil on surfaces which are treated with RMC Oil.


SPECIFIC FEATURES:

- Colours and protects in 1 layer
- 40 standard colours that can be blended for unlimited possibilities
- Enhances the natural look and feel of the wood
- Environmentally friendly: 0% VOC!
- Does not contain any water or solvents
- Easy to maintain
- No overlaps or starting marks
- Durable protection
- Minimal use: 30 - 50 m²/L
- Can be applied to all wood types, furniture as well as floors (solid wood, veneer, MDF, ...)
- Very wear-resistant
- Water-resistant, ideal for kitchens and bathrooms
- Heat-resistant
- Very fast curing: 80% in 2 days
- A short 'dry' maintenance period: after 5 days, the surface can be cleaned with water and soap

DIRECTIONS FOR USE:

1. Untreated wood: sand using the rules of the art. Vacuum thoroughly, eliminate remains of dust with **RMC Cleaner**.
2. Carefully mix the two components (1 to 2 minutes) with a ratio of appr. 3 units A to 1 unit B.
3. Once the cleaned surface is dry, spread out a small quantity of **RMC Oil Plus 2C** (cloth or polishing machine with thin beige pad). Work in zones of 5 - 10 m².
4. Let absorb during a few minutes. Thoroughly remove all excess of oil (cloth or polishing machine with white pad) within 15 minutes per zone. The surface should feel dry! Finish all zones the same way.
5. In a well ventilated room, the surface can be used 24 - 36 hours after the application.

After 5 days a treatment with water and RMC products can be applied.

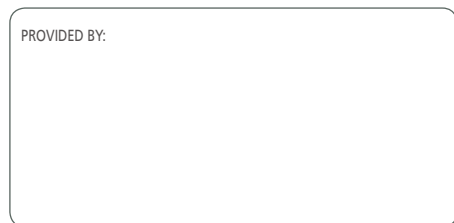

DISCLAIMER: It is the responsibility of the user to determine through own testing whether the product is suited for its chosen application. Muylle Facon NV is not liable for any resultant damage. The above information may be subject to amendments, which will be published in revised versions of the technical sheet. We waive all responsibility for unsatisfactory results that are due to causes unrelated to the quality of the product. This technical information has been collected on the basis of current information and knowledge. The most recent technical sheets can be requested or are available on the website.



Consult the safety sheet before use.
Date TDS: 09/09/14

MUYLLE FACON

MADE IN BELGIUM by N.V. MUYLLE - FACON S.A.
Ambachtenstraat 58 - B-8870 Izegem (Industriezone Abele)
Tel. +32 (0)51 30 80 54 - Fax + 32 (0)51 30 99 78 - HRK 1823
info@muyllefacon.be - www.rubiomonocoat.com

In order to guarantee a long lifespan and protection, the use of Rubio Monocoat maintenance products is imperative.

The equipment used can be cleaned with **RMC Cleaner**.

CONSUMPTION:

30-50 m²/L, depending on the wood type, sanding and application method.

RMC Oil Plus 2C may be used for a maximum of 4 - 6 hours after mixing.

REMARK:

CONSUMPTION INDUSTRIAL APPLICATIONS: 60 - 80 m²/L.

These usages are merely indicative. Results depend on wood type and method of preparation. It is always recommended to make a sample in order to calculate the exact usage.

TECHNICAL CHARACTERISTICS:

RMC Oil Plus 2C (A)

Physical state at 20 °C: liquid

Odour: oily

Flash point: > 99 °C

Density: > 0,9 kg/L

VOC content: 0 g/L

RMC Accelerator (B)

Physical state at 20 °C: liquid

Colour: clear

Odour: none

Flash point: > 160 °C (closed cup)

VOC content: 0 g/L

PACKAGING:

Combined can of 350 ml:

275 ml **RMC Oil Plus 2C (A)** and 75 ml **RMC Accelerator (B)**

Combined can of 1,3 L:

1 L **RMC Oil Plus 2C (A)** and 0,3 L **RMC Accelerator (B)**

Combined can of 3,5 L:

2,750 L **RMC Oil Plus 2C (A)** and 0,750 L **RMC Accelerator (B)**

STORAGE:

The product can be stored up to 24 months in dry conditions and in its original packaging.

ATTENTION:

The product may NOT be diluted!
Cloths, saturated with oil, may spontaneously combust.
After usage, they need to be soaked in water before disposal.

