

LED Flood Lights Instruction Guide



LED Flood Lights Instruction Guide

Safety Information

- 1. Please disconnect power prior to installation.
- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- 3. Before installing, servicing, or performing routing maintenance upon this equipment, follow these general precautions.
- 4. Commercial installation, service, and maintenance of luminaires should be performed by a qualified license electrician.
- DO NOT INSTALL DAMAGED PRODUCT!
- This fixture is intended to be connected to a properly installed and grounded UL Listed junction box.
- 7. Please turn off the Flood Light if you encounter something unusual while operating the product. If something unusual is to occur, please contact HTM Lighting Solutions at +1 (813) 649-8899

Customer Support

If you may have any questions/concerns, please call or email our lighting specialists at:



T: +1 (813) 649-8899




E: sales@htm-lighting.com



To help protect the environment, please dispose of the product properly when it has reached the end of its use. Do not dispose of in household waste. Information on collection points and their opening hours can be obtained from your local municipalities.

Instructions

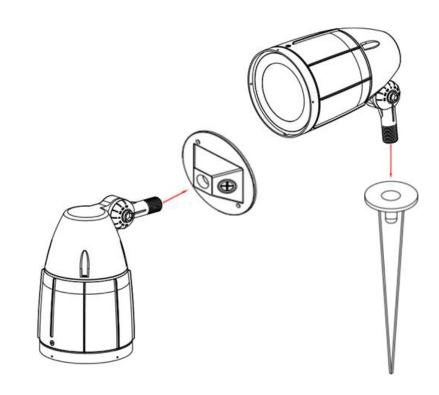

To meet the guidelines of HTM Lighting Solutions warranty, do not modify or adapt the Luminaire for other uses or installations other than as explained in these instructions. Luminaire must be kept clear to allow heat to radiate.



LED Flood Lights Instruction Guide



LED Flood Lights Instruction Guide

Warning

RISK OF ELECTRICAL SHOCK:

- 1. Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- 2. Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code and any applicable local code requirements.
- 5. All wiring connections should be capped with UL approved connectors.

Caution

RISK OF INJURY:

- 1. Wear gloves and safety glasses at all times when removing luminaire from carton, installing, servicing, or performing maintenance.
- 2. Avoid direct eye contact to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.

RISK OF FIRE:

- 1. Keep combustible and other materials that can burn away from luminaire and lamp/lens.
- MIN 194°F SUPPLY CONDUCTORS
- Operating Temperature: -22°F to 104°F

Warning: Please make sure the power is off before installation.

Wall Mounting

Wall Mounting:

- 1. Inspect components to ensure that male and female port threads and sealing surfaces are free of burs, nicks and scratches, or any foreign material.
- 2. Thread arm into cover plate (not supplied) with weatherproof silicone sealant or Teflon tape around arm thread.
- 3. Make wire connection as shown in the wiring diagram.
- 4. Thread cover plate onto junction box and apply weatherproof silicone sealant around the edge of junction box.
- 5. Aim fixture to desired direction then fasten locknut and arm screw.

Ground Mounting

Ground Mounting:

- 1. Inspect components to ensure that male and female port threads and sealing surfaces are free of burs, nicks and scratches, or any foreign material.
- Thread arm into post top (not supplied) with weatherproof silicone sealant or Teflon tape around arm thread.
- 3. Make wire connection as shown in the wiring section.
- Aim fixture to desired direction then fasten locknut and arm screw.

