



SPARE TIRE CARRIER KIT INSTALLATION MANUAL



For technical support , please write us to:
info@afxmotorsports.com or call us at:
Ph. 956-242-6521

HAVE FUN AND A SAFE RIDE!



www.afxmotorsports.com
4610 Modern Lane, Laredo, TX 78041 Ph. 956-242-6521

THIS PRODUCT IS FOR OFF ROAD USE ONLY

Polaris RZR Turbo S 2-4 Seater

POR008

THANK YOU!




FOR PURCHASING AT AFX MOTORSPORTS






SPORT ROOF RACK

HOW TO INSTALL

Pieces included:

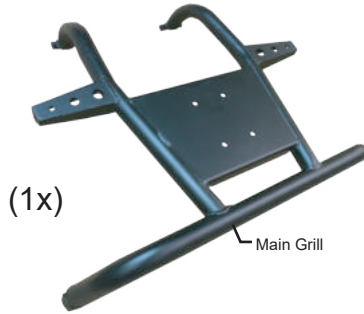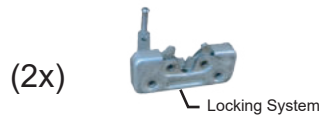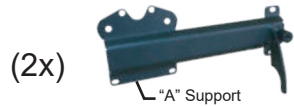

10 Place the spare tire carrier base on the main grill, leaning on the 3/8" x 1" hexagonal screws and nuts to finish the installation.

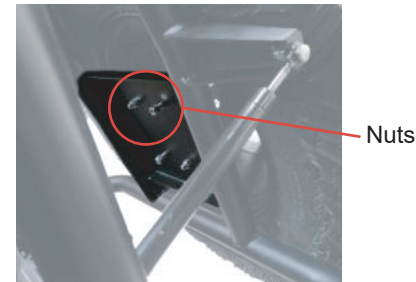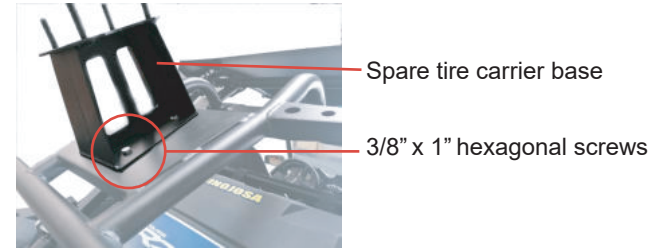

- (1x) Roll cage Support
- (1x) Spare tire carrier
- (1x) Main grill
- (2x) "A" support
- (2x) "A1" support
- (2x) "B" support
- (2x) Locking system
- (2x) 130 lb piston
- (2x) Clamp

- (18x) Screws 1/4" x 1 1/2"
- (22x) Nuts 1/4"
- (8x) Nuts 3/8"
- (8x) Hexagonal Screws 3/8" x 1"
- (2x) Lock washer
- (4x) Screws 1/4" x 2"
- (8x) Washers 1/4"
- (2x) Hexagonal screws 3/8" x 4

3 Now place the clamp with two 1/4 x 2" screws at the left side with 4 washers, two in the outside and two in the inside, and also use nut.



Nut
Washers 1/4"
Clamp

4 Use two 3/8 x 4" hexagonal screws and nuts to place the main grill with the roll cage support, one on each side. Tighten when you finish.




3/8" x 4" hexagonal screws



Nuts

5 Set the "A", "A1" support and the locking system to the roll cage, starting by the right side using 1/4 x 1 1/2" screws with nut, center it with the main grill. Do not tighten yet. Repeat this step on the left side and tighten both sides.

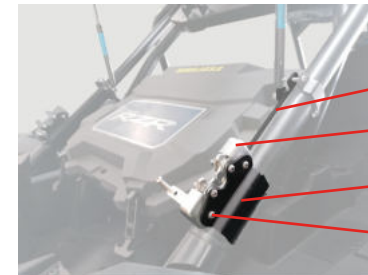


"A" support
Locking system
"A1" support
1/4" x 1 1/2" screws




Direction of screws
1/4" x 1 1/2" toward indoors.

6 Install the "B" support aligning it with the "A" support as it is shown in the image. Lean on the 1/4 x 1 1/2" screws with lock nut.

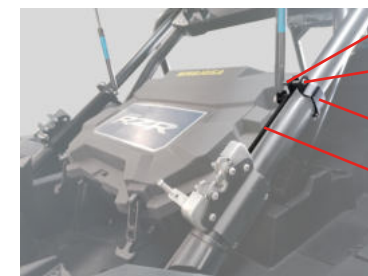


Lock nut
1/4" x 1 1/2" screw
"B" support
"A" support

- 7** Tighten the right piston with the “A” support (as it shown in the image) using a 3/8 x 1” hexagonal screw and lock washer.

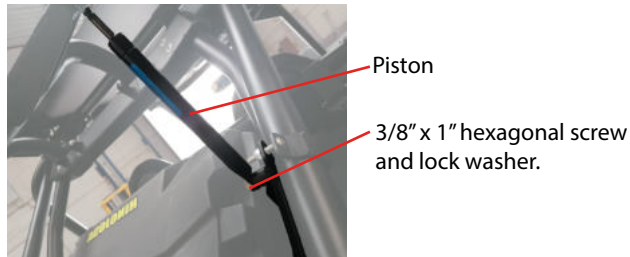

- 8** Go to the upper part of the right piston and tighten it using a 3/8 x 1” hexagonal screw together with the main grill.

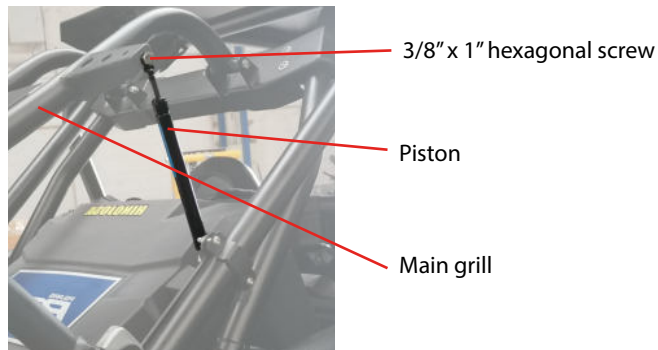

- 9** Repeat step 7 and 8 on the left side to complete the piston installation.

Tools needed (Not Included):

- 5/32” Allen Key.
- 7/16” Combination Wrench.
- (2X) 9/16” Combination Wrench.

Liability Statement

AFX Motorsports products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by AFX Motorsports and is not recommended. AFX Motorsports products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact AFX Motorsports to verify that they will work together. Although AFX Motorsports has thousands of satisfied customers, user should be aware that installing bumpers, rock sliders, spare tire carriers, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. AFX Motorsports urges operators and occupants to wear a helmet and appropriate riding gear at all times. By purchasing and installing AFX Motorsports products, user agrees that should damages occur, AFX Motorsports will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. AFX Motorsports, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from AFX Motorsports. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim. AFX Motorsports will warranty only parts provided by AFX Motorsports. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by AFX Motorsports. AFX Motorsports parts and products are not warrantied if item was not installed properly, misused, or modified.

- 1** Place the “roll cage support”, as it is shown in the image.



- 2** Hold the “roll cage support” and the clamp on the right side using two 1/4 x 2” screws and nuts. Use 4 washers, two in the outside and two in the inside. Do not tighten yet.