


Aircraft Preservation & Sealing Tape

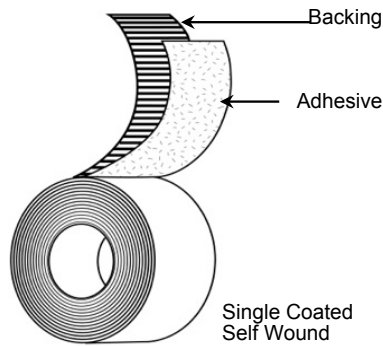

Backing: UV Stabilized LDPE Film

Adhesive: Rubber

Liner: N/A

Colors: White

Specifications: N/A

Standard Sizes: Incremental widths 1/4" - 48" x 108ft

Applications

- Long-term preservation, sealing, and splicing
- Direct protective mask and surface protection for aircraft
- Splicing, seaming, and sealing polyethylene films
- Used in conjunction with outdoor shrink film to secure film and seal film edges for extended outdoor storage

Features

- LDPE Film
- Rubber Adhesive

Benefits

- Conformable for irregular surfaces
- Abrasion resistant
- UV and weather resistant
- Moisture, solvent, and chemical resistant
- Good quick stick
- Excellent adhesion to PE and shrink film
- Clean removal from most surface
- Resists staining and ghosting
- Excellent low-temperature adhesion

Typical Test Values

| | Standard UOM | | Metric UOM | | Test Method |
|--------------------------------|---------------|-------|--------------|------|-------------|
| Total Thickness | 9.0 | mils | 0.229 | mm | PSTC-133 |
| Substrate Thickness | 7.5 | mils | 0.191 | mm | PSTC-133 |
| Adhesion to Steel | 25 | oz/in | 2.74 | N/cm | ASTM D-3330 |
| Tensile Strength | 17 | lb/in | 29.77 | N/cm | ASTM D-3759 |
| Elongation | 600% | | | | |
| Application Temperature | 50 to 120 °F | | 10 to 49 °C | | |
| Operating Temperature | -40 to 200 °F | | -40 to 93 °C | | |

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25C): 12 months from shipment date

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.