

# MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY  
PINEBROOK, ILLINOIS

FED. MFG. CODE 91929

## SWITCH - BASIC

CATALOG LISTING

BZ - RX

BZ - RX  
ISSUE 10

BZ - RX

M

DRAWING NUMBER

ISSUE

13

REPLACES

RELEASE NO.

CHECK

REVISIONS


A	CO	16325
	G C H	19 JAN 62
B	CO	34307
	GLH	19 JAN 76
C	CO77590	
	DLT	9 JUN 94

CHECK

B, JUNE 62

CHECK DRAW

DRAWN  
G C H  
19 JAN 62

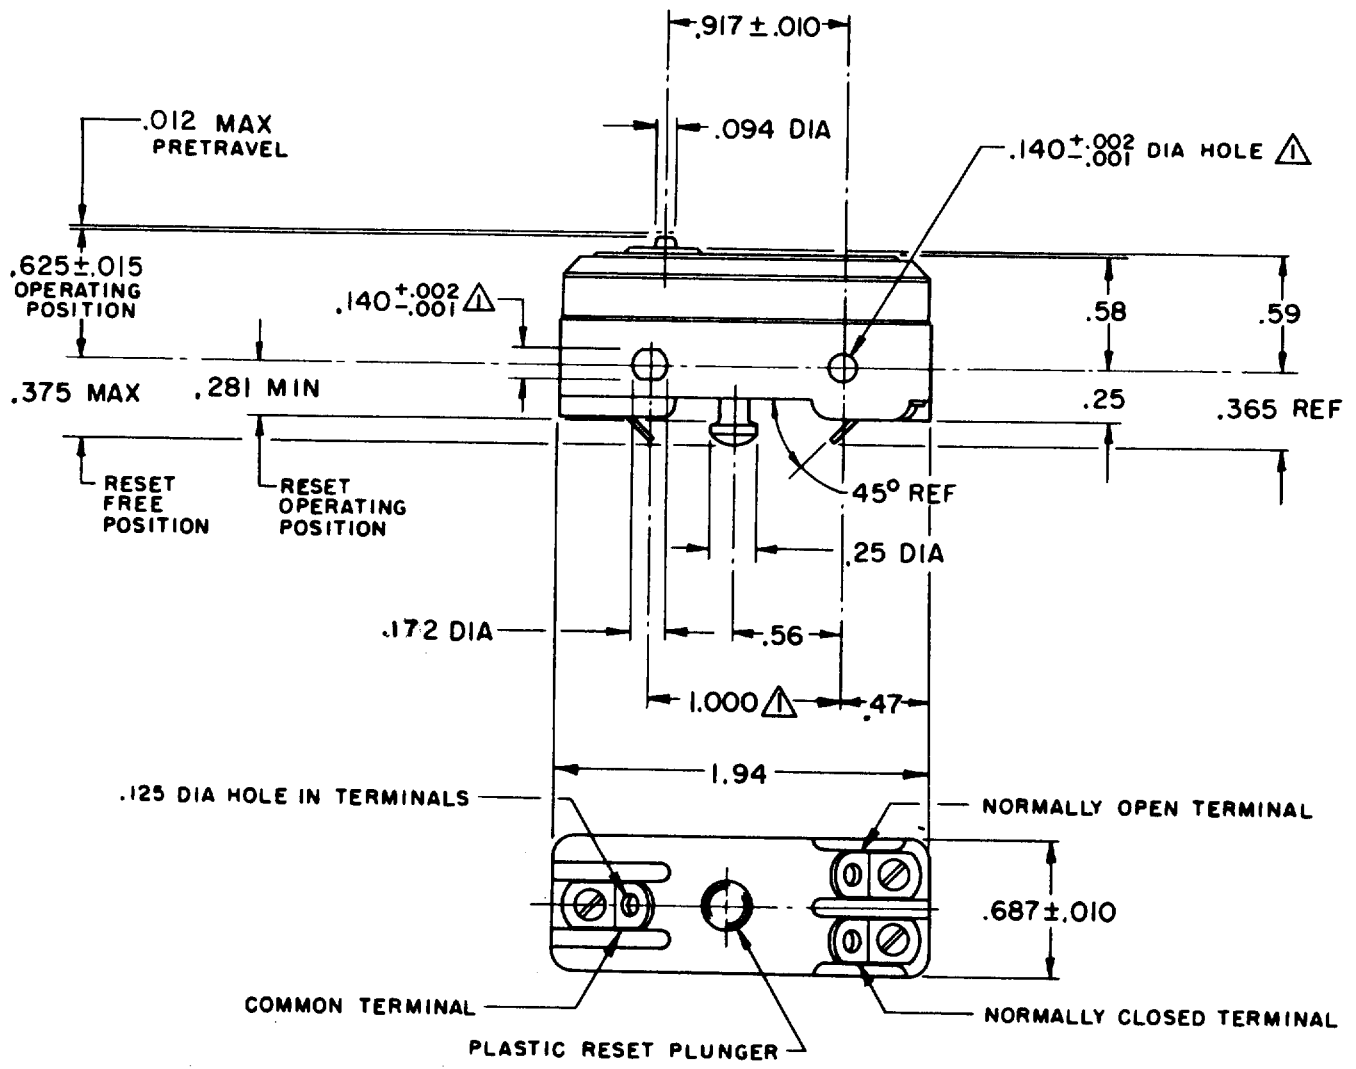

NOTE -

⚠ - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

### CHARACTERISTICS

OPERATING FORCE ----- 7-9 OZ  
OVERTRAVEL ----- .005 MIN

### RESET CHARACTERISTICS

OPERATING FORCE ----- 2-10 OZ  
OVERTRAVEL ----- .015 MIN

### ELECTRICAL DATA

CONTACT ARRANGEMENT  
SINGLE POLE DOUBLE THROW  
MAINTAINED CONTACT

BREAK DISTANCE

UNDERWRITERS' LAB. INC. LISTED RATING  
15 A - 125, 250, OR 480 VAC  
-L 67- 1/4 HP - 125 VAC; 1/2 HP - 250 VAC  
1/2 A - 125 VDC; 1/4 A - 250 VDC



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
**TOLERANCES ARE:**  
ONE PLACE (.0) ± .030  
TWO PLACE (.00) ± .015  
THREE PLACE (.000) ± .005  
ANGLES ±

WEIGHT .055 LB