


**Explosion Proof for Hazardous Locations**

**Standard Length**  
**40 feet**  
(custom lengths available)

**Meets Latest**  
**CSA Standards**

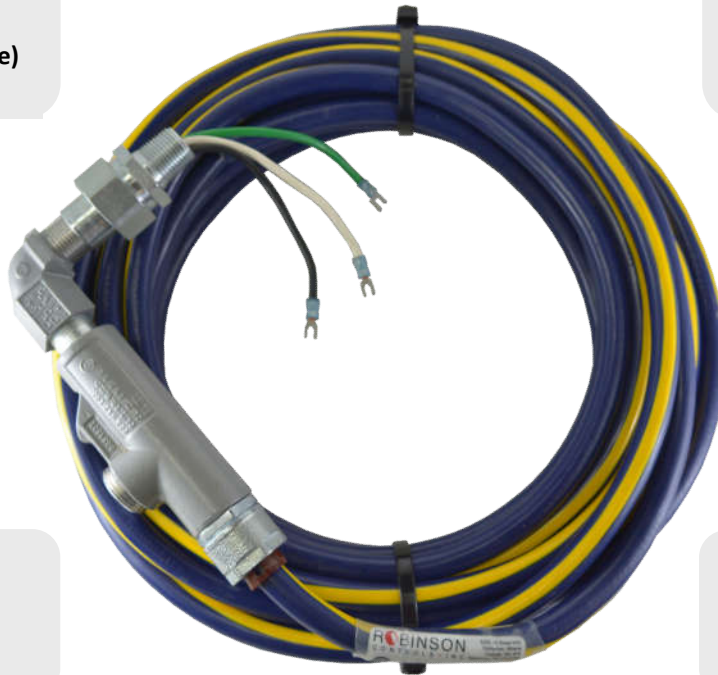

**Rated to -60°C**  
**Voltage 600v**

**Serialized and**  
**Traceable**

**Technical Specifications**

**14/3 -60°C 600 volt**  
**Ultraflex Jacket (for oil applications)**  
**Type STOW**  
**3 Wire (14 gauge)**  
**Class 1, Div 2, Group C & D**  
**CSA Approved (C22.2 No.0 & C22.2 No. 30)**  
**1/2" MNPT with 90° elbow**

**Additional Items...**

Hazardous Location Pressure Switches

- High Temperature
- Low Pressure
- Dual Circuit
- Variable Differential

Pressure Gauges

Isolation Valve

