

# VD 3IP

## Indoor Production Screen

### Specifications

#### Module Information

Pixel Pitch: 3 mm  
Pixel Density: 111,111 Dots/m<sup>2</sup>  
LED: SMD2121 3-in-1  
Size (W \* H \* D ): 192 \* 192 \* 15 mm  
Resolution: 64 \* 64

#### Cabinet Information

Size (W \* H \* D ): 576 \* 576 \* 85 mm  
Resolution: 192 \* 192  
Area: 0.331776 m<sup>2</sup>  
Weight: 12.5 Kg  
Planeness: ≤ 0.5 mm  
Materials: Die-cast Aluminium  
Protection Rating: IP20  
Life Span: 50,000 hr  
Maintenance: Rear Service

#### Electrical Specification

PSU Input Voltage: 100 - 240V AC 50/60 Hz  
Average Power Consumption: ≤ 600 W/m<sup>2</sup>  
Max Power Consumption: ≤ 1,000 W/m<sup>2</sup>  
Power Connection: Powercon In/Out

#### Optical Specification


Brightness(cd/m<sup>2</sup>): ≥ 2,000  
Colour Temperature (K): 3,000 - 10,000 Adjustable  
Horizontal Angle: 140°  
Vertical Angel: 140°  
Pixel Centre Offset: ≤ 3%  
Brightness Uniformity: ≥ 97%  
Chromaticity Uniformity: within +/- 0.003 Cx, Cy  
Contrast Ratio: 2000:1

#### Image Process

Scan Mode: 1/16  
Refresh Rate (Hz): ≥ 1,920  
Data Connection: Ethercon In/Out

#### Required Accessories

Video Controller  
Hanging Beam  
Road Case (optional)

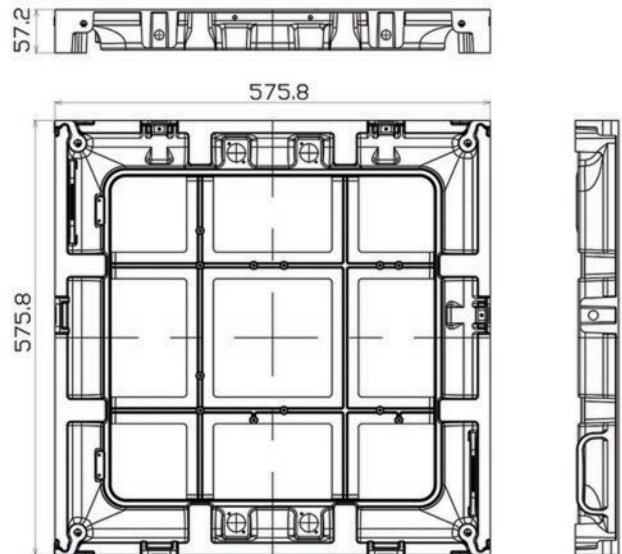

02 9897 3077  
info@eventpixels.com.au  
www.eventpixels.com.au

