

PIG Outdoor Oily Water Filter Bucket Refill

Instructions


The following instructions explain how to properly refill absorbents into a PIG Outdoor Oily Water Filter Bucket. If you have any questions regarding proper installation or use of a PIG Outdoor Oily Water Filter Bucket, please contact New Pig Technical Services at 1-800-HOT-HOGS (468-4647) or visit our website at newpig.com.

1. Remove the lid from your PIG Outdoor Oily Water Filter Bucket.
 2. Remove the saturated absorbents from the bucket and dispose of them in compliance with local, state, federal or country regulations.
 3. Place fresh absorbents into the bucket, starting with one mat pad, then alternating between pads and pillows as shown to the right.
- NOTE:** For round buckets, tuck in the corners of the pillows to fit inside the bucket. Be sure to rotate each pillow by 30° so that the corners do not overlap.
4. After installing the fresh absorbents, prime the filter by filling the bucket with water (approximately 1–2 gallons) until it begins to flow from the outflow port.
 5. Replace the lid and complete filter installation as instructed by the bucket label.


DISPOSAL NOTICE:

Dispose of in compliance with local, state, federal or country regulations.

For Round Buckets

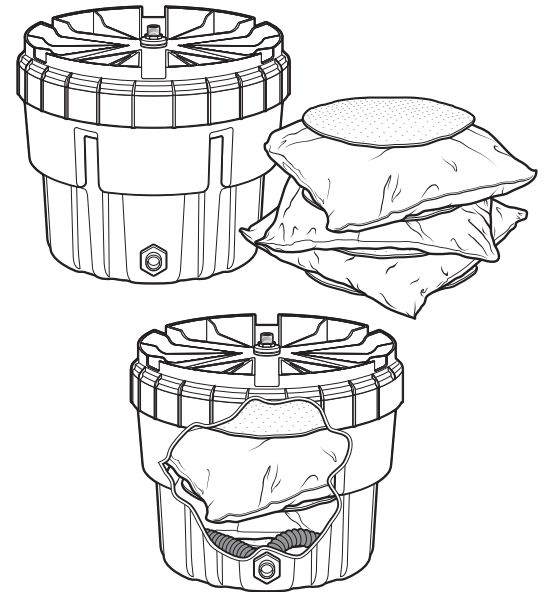

For Rectangular Buckets

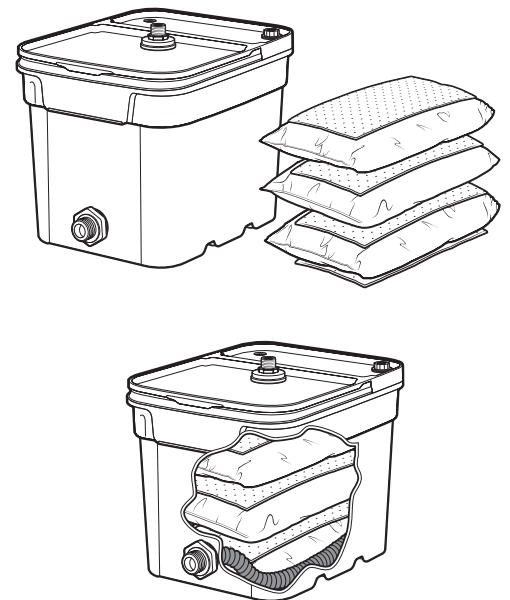

New Pig

One Pork Avenue
Tipton, PA 16684-0304

newpig.com

North America: **1-800-468-4647**

Europe: **+31 (0)76 596 92 50**

China: **+86-21-400 921 5178**

PIG, PIG logo are registered trademarks in USA and other countries. See tm.newpig.com

UK: **0800 919 900**

Outside North America: **+1-814-684-0101**

165991 / 352740