SCobra band Operating Instructions MUTE Φ X 1/4 L 1/5 C

drive HD™ Dash Cams

CB Radios

Walkie Talkie/Two-Way Radios

The Cobra line of quality products includes:

Radar/Laser Detectors

CobraMarine® VHF Radios

Power Inverters

Accessories

Portable Power Packs

For more information or to order any of our products, please visit our website:

www.cobra.com

Printed in Korea

Part No. 480-913-P

Nothing Comes Close to a Cobra® English Nothing Comes Close to a Cobra® English

9 BAND®

RADAR/LASER DETECTOR WITH

EXTRA SENSORY DETECTION

ESR 700



Important Information And Customer Assistance

Important Information

Federal Laws Governing The Use Of Radar Detectors

It is not against federal law to receive radar transmissions with your Cobra radar/laser detector. The Communications Act of 1934 guarantees your right to receive radio transmissions on any frequency. Local laws that contravene this Act, while illegal, may be enforced by your local law enforcement officials until and unless they are prohibited from doing so by federal court action.

Safety Alert

Use of this product is not intended to, and does not, ensure that motorists or passengers will not be involved in traffic accidents. It is only intended to alert the motorist that an emergency vehicle equipped with a Cobra Safety Alert transmitter is within range as defined by that product. Please call local fire and police departments to learn if coverage exists in your area.

Safe Driving

Motorists, as well as operators of emergency or service vehicles, are expected to exercise all due caution while using this product, and to obey all applicable traffic laws.

Security Of Your Vehicle

Before leaving your vehicle, always remember to conceal your radar detector in order to reduce the possibility of break-in and theft.



Customer Assistance

Should you encounter any problems with this product, or not understand its many features, please refer to this owner's manual. If you require further assistance after reading this manual. Cobra Electronics offers the following customer assistance services:

For Assistance in the U.S.A.

Automated Help Desk English only. 24 hours a day, 7 days a week 773-889-3087 (phone).

Customer Assistance Operators English and Spanish. 8:00 a.m. to 5:30 p.m. Central Time Mon. through Fri. (except holidays) 773-889-3087 (phone).

Questions English and Spanish. Faxes can be received at 773-622-2269 (fax).

Technical Assistance English only. www.cobra.com (on-line: Frequently Asked Questions). English and Spanish. productinfo@cobra.com (e-mail).

For Assistance Outside the U.S.A. Contact Your Local Dealer

©2014 Cobra Electronics Corporation 6500 West Cortland Street Chicago, Illinois 60707 USA




Display And Product Features


Accessories Order Info

Controls, Indicators And Connections





Display

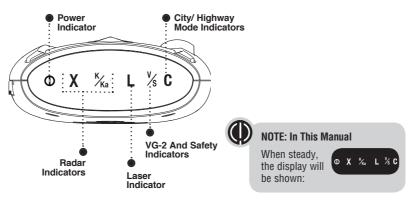

Product Features

Congratulations! You've made a smart choice by purchasing the ESR 700 radar/laser detector from Cobra. Just look at some of the sophisticated features and capabilities your new unit includes:

Detection And Separate Alerts For:

Radar signals (X, K and Ka bands, with signal strength indicated). laser and VG-2 signals

LaserEye

For 360° detection of laser signals

Instant-On Ready

Detects radar guns with "instant-on" (very fast) speed monitoring capabilities

Tone Alerts

With adjustable volume

UltraBright Data Display

Is easy to read

City Or Highway

Modes to reduce false alerts

Safety Alert

Traffic warning system distinguishes important safety alerts from other K band signals

Manual Mute Or Auto Mute

A mute function of audio alerts

Mounting

Mounts easily on windshield or dashboard

This booklet describes the simple steps for mounting and setting up your detector. It also provides helpful information about how radar and laser guns are used and how you can interpret the alerts you receive.

Ordering From U.S.A.

Call 773-889-3087 for pricing or visit www.cobra.com.

For Credit Card Orders

Call 773-889-3087 [Press one from the main menul 8:00 a.m. to 5:30 p.m. Central Time. Monday through Friday.

Make Check or Money Order Payable To

Cobra Electronics. Attn: Accessories Dept. 6500 West Cortland Street, Chicago, IL 60707 U.S.A.

To Order Online

Please visit our website: www.cobra.com

Item #	Description
420-030-N-001	Straight 12V Power Cord
420-026-N-001	Coiled 12V Power Cord
545-159-N-001	Windshield Mounting Bracket
CLP-2B	Dual Port Power Adapter



Table Of Contents


	Introduction Important Information A Customer Assistance A Controls, Indicators And Connections A Display A Product Features A	12
Q	Your Detector Installation Getting Started Settings Highway/City Mode. Muting An Alert Auto Mute Mode Detection Signals Detected Audio Alerts Visual Display Instant-On Detection Responding To Alerts Understanding Radar And Laser Maintenance. 1 Specifications. 1	5 6 6 7 7 8 8 8 8 1 1 2 4
5	Warranty Limited 1-Year Warranty	5
	Customer Assistance 1 Product Service 1 Trademark Acknowledgement 1 Optional Accessories 1 Accessories Order Info 1	6

Installation Your Detector


Installation

Where To Mount Your Unit

You will get optimum performance from your detector if you **Mount** it at a point approximately in the center of the vehicle, as low as possible on the front windshield without obstructing the unit's view of the road either to the front or rear. You can also mount it directly on the dashboard.



The unit's lens must not be blocked and the LaserEye should have a clear view out the back window to allow 360° detection.



Radar and laser signals pass through glass but not through other materials and objects. Objects that can block or weaken incoming signals include:

- Windshield wiper blades
- Mirrored sun screens
- Dark tinting at the top of the windshield
- Heated windshields currently available on some vehicles (Instaclear for Ford, Electriclear for GM.) Consult your dealer to see if you have this option.

Windshield Mounting

1. Attach the rubber cups to the bracket.



- 2. Make sure the rubber cups and your windshield are clean.
- 3. Push the bracket firmly onto the windshield.




- 4. Attach the detector to the bracket. Check the angle of the unit.
- 5. To adjust the angle if necessary, gently push or pull on the bracket to bend it. DO NOT use the detector to bend the bracket.
- 6. Plug the power cord into the detector.
- 7. Plug the cigarette lighter adapter on the power cord into your vehicle's cigarette lighter.



Dashboard Mounting

- 1. Place the detector on the dashboard to find a location where the unit has a clear, level view of the road. The angle can NOT be adjusted after mounting.
- 2. Remove the paper backing from one (1) side of the hook-and-loop fastener.
- 3. Attach the pad to the dashboard at your chosen location and remove the other paper backing.



- **6.** Plug the power cord into the detector.
- 7. Plug the cigarette lighter adapter on the power cord into your vehicle's cigarette lighter.



Getting Started

Your Detector



To Turn On The Unit And Adjust The Audio Volume

Rotate the On-Off/ Volume control clockwise (away from you).

Tone	Visual Display
Three (3) beeps	The power indicator will light up in the display indicating that the power is On .



In some vehicles, power is supplied to the cigarette lighter even while the ignition is Off. If this is the case with your vehicle, you should turn **Off** or unplug your detector when parking for lengthy periods.

Your Detector

Settings

Settings

When changing the **Settings** on your detector, please keep in mind:

• Each time the unit is turned **On** the factory settings of **Highway** and Auto Mute-On will be set. They can be changed while the unit is in use as described in the following sections.

Highway/City Mode

Setting your detector to City mode delays all X band audio alerts at lower signal strength levels. (A single beep will sound when the signal is first detected.) This will reduce false alerts while you are driving in, or near, urban areas where there are many sources for conflicting X band signals such as microwave towers and automatic door openers.

To change settings, follow the procedure listed below, which indicates what you will see and hear as you complete each step. The factory setting is **Highway** mode.





City Mode





To Change From Highway Mode To City Mode

Press and release	Tone	Visual Display
the City button.	One (1) beep	C appears in the display

To Change From City Mode Back To Highway Mode

Press and release	Tone	Visual Display
the City button again.	Two (2) beeps	C off

Muting An Alert

Your detector allows you to quickly turn **Off** an audio **Alert** by momentarily pressing the **Mute** button. If you press the **Mute** button a second time during the Alert, the audio Alert will be turned back On.

Auto Mute Mode

Auto Mute will automatically reduce the audio volume of all alerts after four (4) seconds for as long as the signal is detected. The factory setting for Auto Mute is On.



To Turn Auto Mute Off

Press and release
the Mute button
while no alert
is occurring.

Tone	Visual Display
One (1) beep	None

To Turn Auto Mute On

Press and release
the Mute button
again while no
alert is occurring.

Tone	Visual Display
Two (2) beeps	None

Detection Your Detector

Detection

Signals Detected

The tables on the following pages show you the types of **Signals** your detector will detect, as well as the visual alerts it provides for each of them.

Audio Alerts

A distinctly different **Alert** tone is used for each type of signal detected (including separate tones for each laser signal). For X, K and Ka band radar signals, the tones will repeat faster as you approach the signal source. The repeat rate of the tones gives you useful information about the signal detected. (See responding to alerts on page 11.)

Visual Display

An indication of the type of signal detected will appear in the UltraBright data **Display**.

During radar alerts the letters **X** or \(\structure{\kappa} \) will appear.

X Signal Detected



Ka Signal Detected





① X ‰ L % C

During laser alerts the letter **L** will appear.

Laser Signal Detected



During VG-2 and Safety Alerts, the letters \square will appear.

VG-2 Alert Signal Detected

Safety Alert Signal Detected





Radar Signals And Visual Displays

. ,		
Type of Signal	Visual Display	
X Band Radar	X is Steady	
K Band Radar	‰ is Steady	
Ka Band Radar	‰ is Steady	

X Signal Detected

K Signal Detected

Ka Signal Detected







Laser Signals And Visual Displays

-	Tild Vioda. Biopidyo		
	Type of Signal	Visual Display	
	LTI 20-20*	L is Steady	
	LTI Ultra-Lyte*	L is Steady	
	Kustom Signals ProLaser*	L is Steady	
	Kustom Signals ProLaser III*	L is Steady	

^{*} Your detector provides 360° detection of these signals.

Laser Signal Detected







Your Detector

Safety Alert Signals And Visual Displays

Type of Signal	Visual Display
Emergency Vehicles	⅓ is Steady
Road Hazards	⅓ is Steady
Trains	⅓ is Steady

Safety Alert Signal Detected



VG-2 Alert Signal And Visual Display

Type of Signal	Visual Display
Interceptor VG-2	% is Steady

VG-2 Alert Signal Detected



Instant-On Detection

Your detector is designed to detect Instant-On speed monitoring signals, which can suddenly appear at full strength.



You should take appropriate action immediately whenever an instant-on alert is given.

Responding To Alerts

Description	Interpretation	Recommended Response	
Tone repeats slowly at first, then speeds up rapidly.	Probably police radar	FULL ALERT	
Tone sounds one (1) time only.	Probably a false alarm, but possibly pulsed radar or VG-2 nearby	Exercise caution	
Tone instantly begins repeating rapidly.	Radar or VG-2 nearby has been activated suddenly	FULL ALERT	
Tone repeats slowly as you approach a hill or bridge, then speeds up sharply as you reach it.	Probably police radar beyond the hill or bridge	FULL ALERT	
Tone repeats slowly for a short period.	Probably a false alarm	Exercise caution	
Any type of laser alert.	Laser alerts are never false alarms	FULL ALERT	
Any Safety Alert.	You are nearing an emergency vehicle, railroad crossing, or road hazard (construction, accident, etc.)	Exercise caution	



Understanding Radar And Laser

Your Detector

Understanding Radar And Laser

Understanding Radar And Laser

Radar Speed Monitoring Systems

Three (3) band frequencies have been approved by the Federal Communications Commission (FCC) for use by speed monitoring radar equipment:

10.525 GHz X band K band 24.150 GHz

Ka band 33.400 - 36.00 GHz

Your detector detects signals in all three (3) radar bands.

VG-2

VG-2 is a "detector detector" that works by detecting low-level signals emitted by most radar detectors. Your detector does not emit signals that can be detected by VG-2, but does detect VG-2 signals and will alert you when a device is in use near your vehicle.

Safety Alert® Traffic Warning System SAFET SAFET

FCC-approved Safety Alert transmitters emit microwave radar signals that indicate the presence of a safety-related concern. Depending on the frequency of the signal emitted, it can indicate a speeding emergency vehicle or train, or a stationary road hazard.

Because these microwave signals are within the K band frequency, most conventional radar detectors will detect Safety Alert signals as standard K band radar. Your detector, however, is designed to differentiate between standard K band and Safety Alert signals, and give separate alerts for each.

Safety Alert technology is relatively new. Safety Alert transmitters can be found in limited numbers in all 50 states, but the number is growing. Depending on your location, you may not receive these alerts regularly and may often encounter emergency vehicles, trains and road hazards without being alerted. As the number of transmitters increases. these alerts will become more common.

When you receive such an alert, please watch for emergency vehicles ahead of you, on cross streets and behind you. If you see an emergency vehicle approaching, please pull over to the right side of the road and allow it to pass.

LIDAR (Laser)

The correct name for the technology that most people refer to as laser is actually **LIDAR**, which stands for Light Detection and Ranging.

LIDAR operates much like radar. Its signal spreads out like a radar signal, though not as widely. Unlike radar, LIDAR must have a clear line of sight to its target vehicle throughout the entire measurement interval. Obstructions such as sign posts, utility poles, tree branches, etc., will prevent valid speed measurement.

Some common questions about LIDAR include:

- Does weather have any affect on LIDAR? Yes. Rain, snow, smoke, fog, or airborne dust particles will reduce the effective range of LIDAR and can, if dense enough, prevent its operation.
- Can LIDAR operate through glass? Yes. Newer LIDAR guns can obtain readings through most types of glass. However, the laser pulse also can be received through glass to trigger an alarm by your detector.
- Can LIDAR operate while in motion? No. Because LIDAR operates by line of sight, the person using it cannot drive the vehicle, aim and operate the gun all at the same time.
- Is LIDAR legal to use? Yes. It is legal in all 50 states.



Maintenance And Specifications

Warranty And Product Service

Maintenance

Maintenance Of Your Radar Detector

Your detector is designed and built to give you years of trouble-free performance without the need for service. No routine Maintenance is required.

If your unit does not appear to be operating properly, please follow these troubleshooting steps:

- Make sure the power cord is properly connected.
- Make sure the socket of your vehicle's cigarette lighter is clean and free of corrosion.
- Make sure the power cord's cigarette lighter adapter is firmly seated in your cigarette lighter.
- Check the power cord fuse. (Unscrew the ribbed end cap of the cigarette lighter adapter and examine the fuse. If required, replace it with a 2-amp fuse only.)

Specifications

Band And Frequencies

Band	Frequenci	Frequencies		
X Band	10.525	± 0.050	GHz	
K Band	24.125	± 0.125	GHz	
Safety Alert Traffic Warning System	24.070 24.110 24.190 24.230	± 0.010 ± 0.010 ± 0.010 ± 0.010	GHz GHz GHz GHz	
Ka Band	34.700	± 1.300	GHz	
Laser	910	± 50	nm	

This radar detector is covered by one or more of the following U.S. patents: 5,497,148; 5,594,432; 5.612.685; 6.078.279; 6.094.148. Additional patents may be listed inside the product or pending.

Limited 1-Year Warranty

For Products Purchased In The U.S.A.

Cobra Electronics Corporation warrants that its Cobra 9 Band Radar/Laser Detectors, and the component parts thereof, will be free of defects in workmanship and materials for period of one (1) year from the date of first consumer purchase. This warranty may be enforced by the first consumer purchaser, provided that the product is utilized within the U.S.A.

Cobra will, without charge, repair or replace, at its option, defective 9 Band Radar/Laser Detectors, products or component parts upon delivery to the Cobra Factory Service Department, accompanied by proof of the date of first consumer purchase, such as a duplicated copy of a sales receipt.

You must pay any initial shipping charges required to ship the product for warranty service, but the return charges will be at Cobra's expense, if the product is repaired or replaced under warranty.

This warranty gives you specific rights, and you may also have other rights which vary from state to state.

Exclusions: This limited warranty does not apply: 1) To any product damaged by accident. 2) In the event of misuse or abuse of the product or as a result of unauthorized alterations or repairs. 3) If the serial number has been altered, defaced or removed. 4) If the owner of the product resides outside the U.S.A.

All implied warranties, including warranties of merchantability and fitness for a particular purpose are limited in duration to the length of this warranty.

Cobra shall not be liable for any incidental, consequential or other damages; including, without limitation, damages resulting from loss of use or cost of installation.

Some states do not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you.



Product Service

For any questions about operating or installing this new Cobra product, or if parts are missing... PLEASE CALL COBRA FIRST...do not return this product to the store. See customer assistance on page A1.

If this product should require factory service, please call Cobra before sending the product. This will ensure the fastest turn-around time on any repair. If Cobra asks that the product be sent to its factory, the following must be furnished to have the product serviced and returned:

- 1. For Warranty Repair include some form of proof-of-purchase, such as a mechanical reproduction or carbon of a sales receipt. Make sure the date of purchase and product model number are clearly readable. If the originals are sent, they cannot be returned: 2. Send the entire product: 3. Enclose a description of what is happening with the product. Include a typed or clearly printed name and address of where the product is to be returned, with phone number (required for shipment).
- 4. Pack product securely to prevent damage in transit. If possible, use the original packing material: 5. Ship prepaid and insured by way of a traceable carrier such as United Parcel Service (UPS) or
- Priority Mail to avoid loss in transit to: Cobra Factory Service, Cobra Electronics Corporation, 6500 West Cortland Street, Chicago, Illinois 60707 U.S.A.; 6. If the product is in warranty, upon receipt of the product it will either be repaired or exchanged depending on the model. Please allow approximately 3 - 4 weeks before contacting Cobra for status. If the product is out of warranty, a letter will automatically be sent with information as to the repair charge or replacement charge.



Trademark Acknowledgement And Optional Accessories

Trademark Acknowledgement

Cobra, 9 Band, DigiView, Extra Sensory Detection, HighGear, microTALK, LaserEye, Safety Alert Traffic Warning System, Strobe Alert, VG-2 Alert and Nothing comes close to a Cobra are registered trademarks of Cobra Electronics Corporation.

Cobra Electronics Corporation, 11 Band, EasySet, IntelliMute, IntelliShield, Road Ready, SmartPower, Spectre Alert, UltraBright, Voice Alert and Xtreme Range Superheterodyne are trademarks of Cobra Electronics Corporation.

Opticom is a trademark of 3M Corporation. Instaclear for Ford is a registered trademark of Ford Motor Company, Inc. Electriclear for GM is a registered trademark of General Motors Corporation. 20-20 and Ultra-Lyte are trademarks of Laser Technology, Inc. ProLaser and ProLaser III are trademarks of Kustom Signals, Inc. Bee III and Pop are a trademarks of MPH Industries. Spectre is a trademark of Stalcar. Interceptor VG-2 is a trademark of TechniSonic Industries LTD. Tomar is a registered trademark of TOMAR Electronics. Inc.

Optional Accessories

You can find quality Cobra products and accessories at your local Cobra dealer, or in the U.S.A., you can order directly from Cobra. See order info on page 17.



Straight 12V DC Power Cord

Includes plug and fuse Item # 420-030-N-001



Coiled 12V DC Power Cord

Includes plug and fuse Item # 420-026-N-001



Windshield Mounting Bracket

Includes suction cups Item # 545-159-N-001



Dual Port Power Adapter

Includes adjustable plug (up to 90°) and fuse Item # CLP-2B