

THE POWER OF



52mm Gauge Sensor Dimensions

When selecting an optional sensor to suit your REDARC gauge it's important to choose one which will fit the intended mounting location. Below are the dimensions of REDARC's optional sensors.

Part Number	Dimensions
GS-UT-80	<p>Technical drawing of the GS-UT-80 sensor. It shows a cylindrical sensor head with a diameter of 7mm and a length of 25mm. A long cable extends from the head to a rectangular connector housing. The total length of the assembly is 550mm.</p>
GS-UT-120	<p>Technical drawing of the GS-UT-120 sensor. It features a sensor head with a 2mm height and a 6mm diameter hole. The hole is offset by 16.5mm from the left edge. The sensor head length is 40mm. A long cable connects it to a rectangular connector housing. The total length is 550mm.</p>
GS-OWT1-4	<p>Technical drawing of the GS-OWT1-4 sensor. It has an outer diameter of 5.5mm and an inner diameter of 4mm. The sensor length is 16mm, followed by a cable of 8.5mm. It features a 1/4" NPT fitting with a 1mm gap. The sensor is housed in a rectangular housing that is 14mm long and 20mm high. The housing is offset by 6.5mm from the cable. The total length of the assembly is 47.5mm.</p>

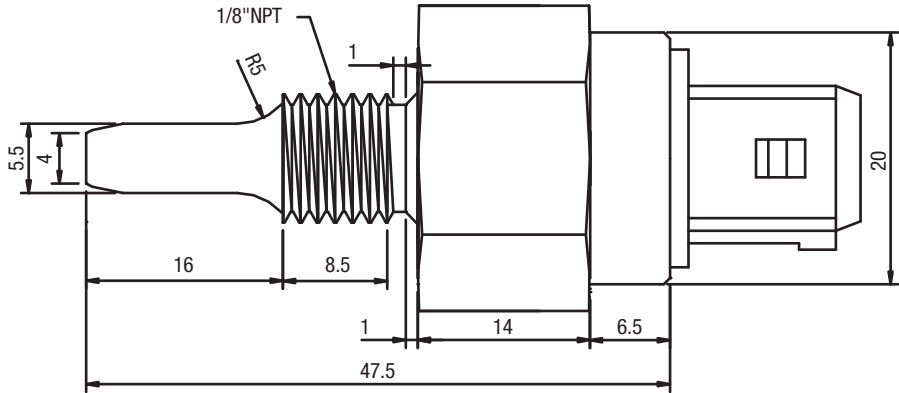
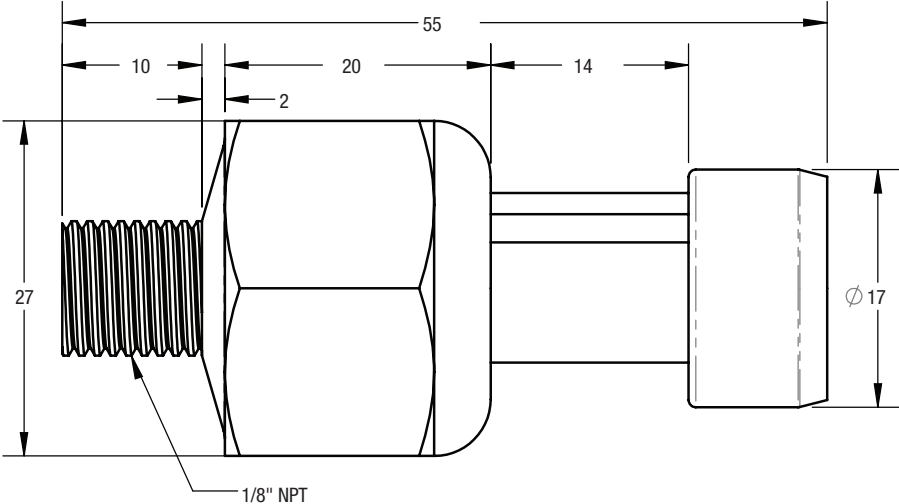
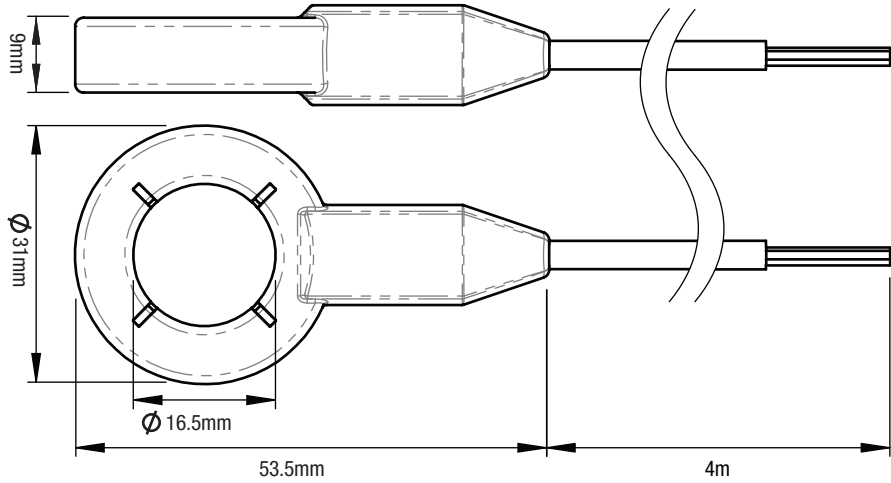
TECH TIP

Copyright 2017 REDARC Electronics Pty Ltd. All Rights Reserved

THE POWER OF

REDARC[®]

52mm Gauge Sensor Dimensions

GS-OWT1-8	 <p>Technical drawing of the GS-OWT1-8 sensor. The drawing shows a side view and a front view. Dimensions include: 1/8" NPT, R5, 5.5, 4, 16, 8.5, 1, 14, 6.5, 47.5, and 20.</p>
GS-P-150	 <p>Technical drawing of the GS-P-150 sensor. The drawing shows a side view and a front view. Dimensions include: 10, 20, 14, 55, 27, 2, 1/8" NPT, and $\varnothing 17$.</p>
GS-AMPS	 <p>Technical drawing of the GS-AMPS sensor. The drawing shows a side view and a front view. Dimensions include: 9mm, $\varnothing 31$mm, $\varnothing 16.5$mm, 53.5mm, and 4m.</p>

TECH TIP

Copyright 2017 REDARC Electronics Pty Ltd. All Rights Reserved