

WARNING

Like any moving product, scooters can be dangerous if due care and attention isn't taken. Be sure to read the manual before using the scooter and pay attention to the following:

1. User maximum weight 20kg
2. Always wear a helmet and keep chinstrap securely buckled
3. Safety equipment such as knee and elbow pads is also recommended
4. Closed toe shoes are recommended
5. Avoid surfaces with too much water, gravel, sand and other debris. Wet surfaces impairs traction.
6. Avoid sudden surface changes. Scooter may suddenly stop
7. Obey local regulations of road safety.
8. Ride on smooth surfaces away from motor vehicles
9. Not to be used in traffic
10. Watch out for pedestrians
11. Avoid excessive speeds associated with downhill rides
12. Before each use check the scooter for loose bolts
13. Periodically check hardware and tighten if necessary. Replace worn or broken parts
14. Brake will get hot from continuous use. Do not touch after braking
15. Do not perform stunts
16. Adult supervision required

Care

Advice for maintenance and repair
Turn the scooter upside down and try to spin the wheel.

Check the wheels regularly. Damaged wheels have to be replaced. In case of wheel replacement, make sure all screws are tightly secured.


IMPORTANT NOTICE TO PARENTS

This manual contains important information relating to your child's safety, it is your responsibility to review this information with your child and make sure they are fully aware of all the information and warnings within the manual. Please carefully read this manual before you commence assembly of this scooter and review this information with young riders before they ride.




SCOOTER

1. Open the box and take out the parts. Please check whether all parts and components are included:

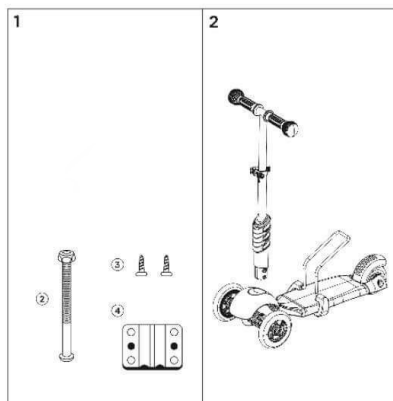

2. Firmly press the handlebar down until you hear the handlebar locking into position. Give the handlebar a tug, if it feels secure, then assembly is complete!

(WARNING: Make sure the handlebar is securely fastened, and not loose)

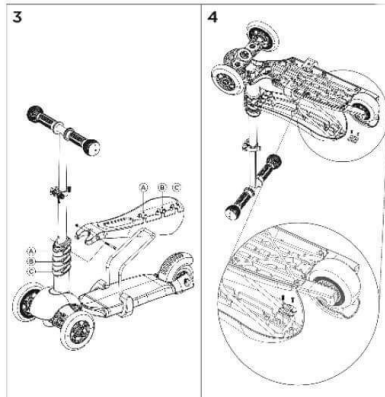

3. According to the suitable height (1.2.3) assembly the seat, then put the stent in correct hole (1.2.3) on the back seat.

4. Attach the plastic cover and drill in screw.