DATASHEET

This information may not, in whole or in part, be copied, photocopied, reproduced, translated or reduced to any electronic medium or machinereadable form without the prior written consent of Hatteland Technology AS. The products may not be copied or duplicated in any way.



Product: Silicone Rubber Keyboard

Typenumber: HT RKCT92x-W-MC1

> Last Revised: 10 Sep 2019 Revision#: 00_02

RKCT92 Silicone Rubber Keyboard - External Module

Description:


The Hatteland Technology Full travel rubber Keyboard. This 92 key backlit keyboard features a compact keyboard with integrated waterproof 25 mm trackball and scroll function. The rubber keys are proven for efficient cleaning, reduced disinfection time and protection against cross contamination. The backlit keys warrant for optimized performance while working in low-light environments.


Features:		
Compact layout	92 full travel rubber keys	
Backlight	Dimmable backlight at 8 levels by two dedicated keys	
• LED	Low power LED's warrant for a long life	
Test and certificate	Test and certificate	
Power requirements	Powered directly from USB port	


Techincal Specificat	ions:		Physical Specifications:
Sealing:	IP67 sealed	Desktop mount dimmensions:	350mm x 159mm x 36mm
Keys:	92 full travel rubber keys	Desktop mount Weight:	0.6kg/1.32lbs
Pointing Device:	25 mm optical trackball	Panel mount dimmensions:	354.5mm x 163.5mm x 38.6mm
Power requirements:	Directly from USB port	Panel mount weight:	0.7kg/1.54lbs
Output:	1x 1.8m. USB cable (panel mount) 1x 1.6m. USB cable (enclosed)		
Operating temperature:	0°C to +60°C		
Switch force	210 grams		
Switch stroke	2 mm		

Illustrations for desktop mount HT RKCT92S-W-MC1

Illustrations for panel mount HT RKCT95F-W-MC1

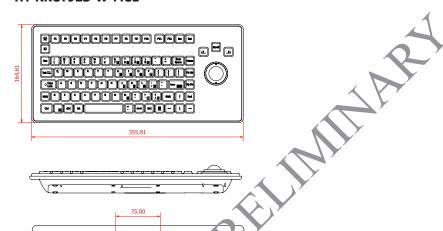





Drawings pending

Dimensions might be shown with or without decimals and indicated as mm [inches]. Tolerance on drawings is +/- 1mm. For accurate measurements, check relevant DWG file.