
Assembly guide

Note: Front lip only fit on Base model bumper.

1.- First front bumper need to remove off the car.



2.- Open the hood remove top radiator cover by remove all the taps first. Then unclip the headlight eyelid from the headlight. Remove all the screws secure the bumper on each side of the fender and bolts and taps on the bottom of the under panel. Then your bumper can pull right off the car.

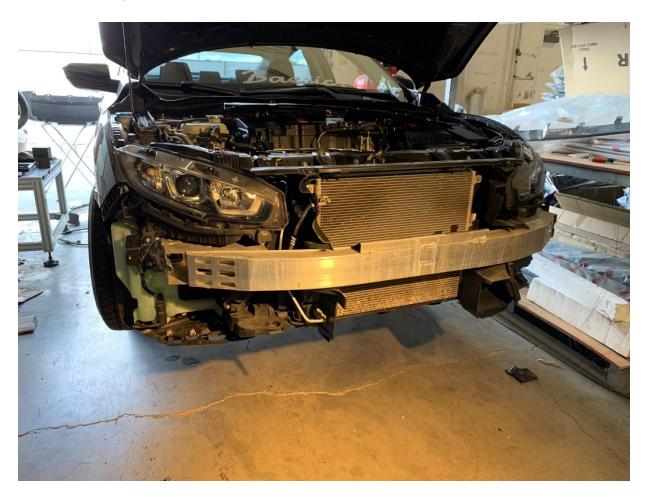

3. – Secure the bumper on the surface upside down. Like the picture.



4.- Screw left and right side of the lip on to the bumper first.



5.- Then start secure the 4 center taps on the lip.



6.- Next secure the location on red arrow.



7. – Check fitment after finish install the lip on the bumper. Make sure to check on the red arrow area.

It need to sit flush with the bumper. If not flush it need to re-adjust the position on the mounting point. At this point it need to use visual adjust. We do not have the exact position on mount. It is vary.



8.- After the lip complete install on the bumper should look like this.



9.- You are ready to put the bumper back on the car now. Reverse the step from remove the bumper.



Enjoy the FC1/FC2 Type-r Style Front Lip. Stay tune for more FC item on our website. www.absdynamics.com