

BY-LTE-Blade12

5G/4G/LTE POS blade antenna



Product Overview

Frequency (MHz) :

698-960/1710-2170/2500-2700/3400-3800

VSWR \leq 2

Gain (dBi) : 1/2/3/4

Max Input power (W) :60

Input Impedance (Ω) :50

Polarization:Vertical

Size (mm) : Φ 83(Base) \times 173(Height)

Cable Length (m) :2,3,5 etc.

Cable Type:RG174

Connector: SMA/SMB/SMC/BNC/FME/TNC/MCX/MMCX
etc.

Mounting: Magnetic

Housing: Black

Storage Temperature: -45°C to +75°C


Operating Temperature: -45°C to +75°C

Supports the following technologies

- LTE
- 2G
- 3G
- 4G
- 5G
- Zigbee
- Z-Wave
- LoRaWAN
- Sigfox
- LTE-M / NB-IoT
- Bluetooth
- Wi-Fi 2.4GHz

Characteristic Curve

11 A/R SWR MKR 1: 1.852 U
 REF 1.000 U 1.000 U/ 690 000 000.Hz

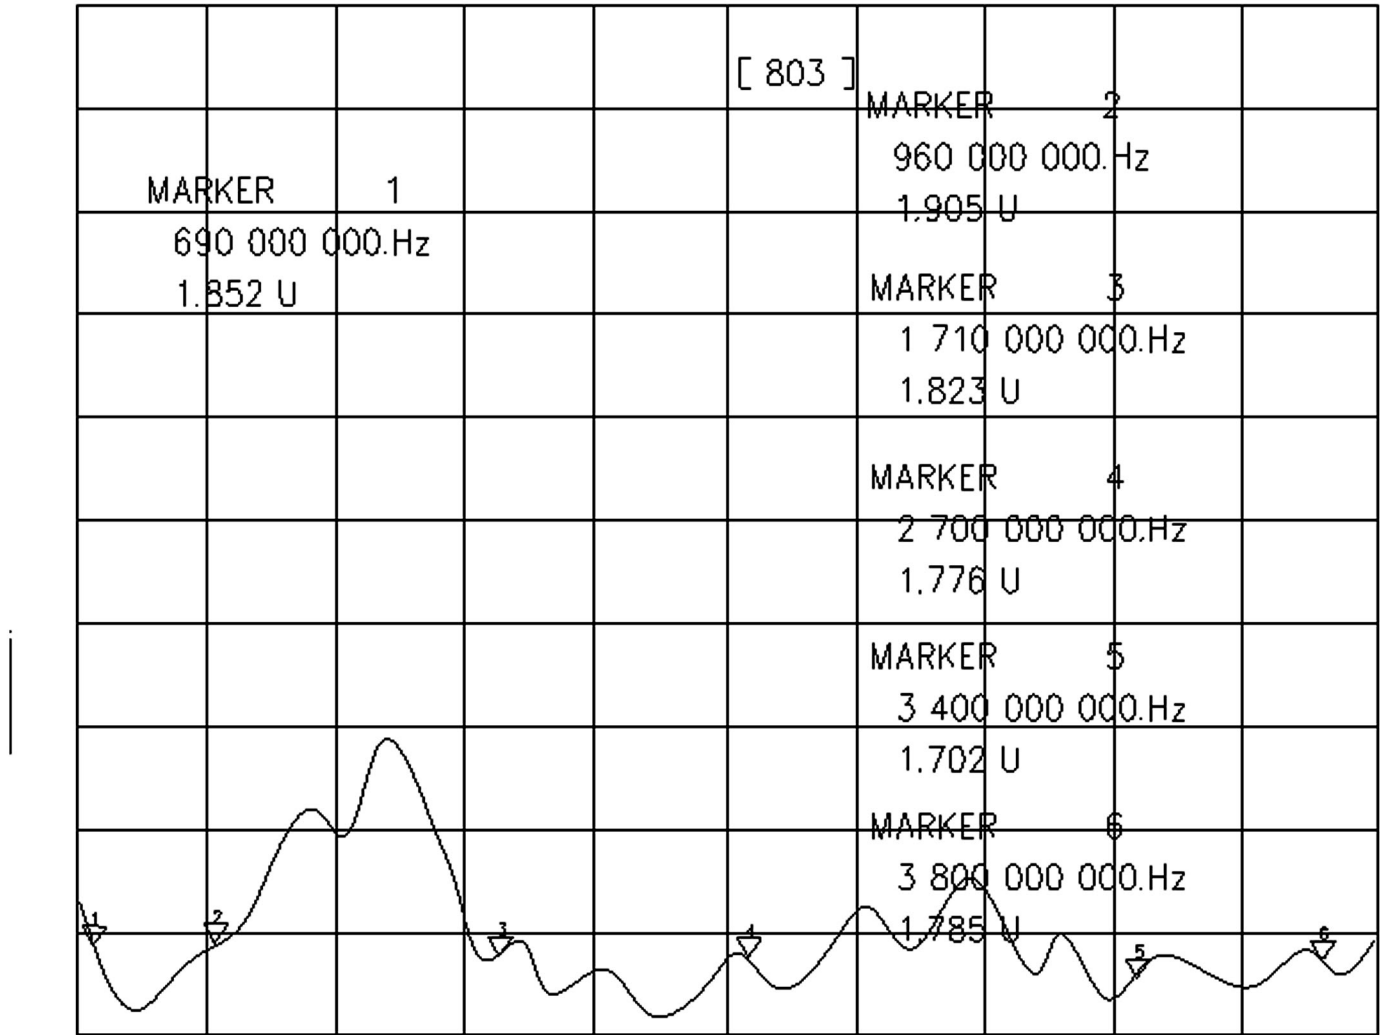

CH1 START 600 000 000.Hz STOP 4 000 000 000.Hz

Mechanical Specifications

