

DPAF0S01

Dielectric Antenna(30*5*5 mm) 824~960MHz and 2.4GHz Antenna



This specification covers the dielectric antenna for 824~960MHz, 2400~2500 MHz application.

Product Specifications

Working Frequency: 824~960 MHz ; 2400~2500 MHz

Dimension: 30×5×5 mm

VSWR: <3.5

Polarization: Linear

Impedance: 50 Ω

Operating Temperature: -40 ~ 85°C

Termination: Ag (Environmentally-Friendly Pb Free)

Efficiency(%) :


- 824~960 MHz: 50

- 2400~2500 MHz: 40

* Evaluation board size 40X120 mm.

* Actual Electrical value will depend on customer ground plane size.

Response Curve

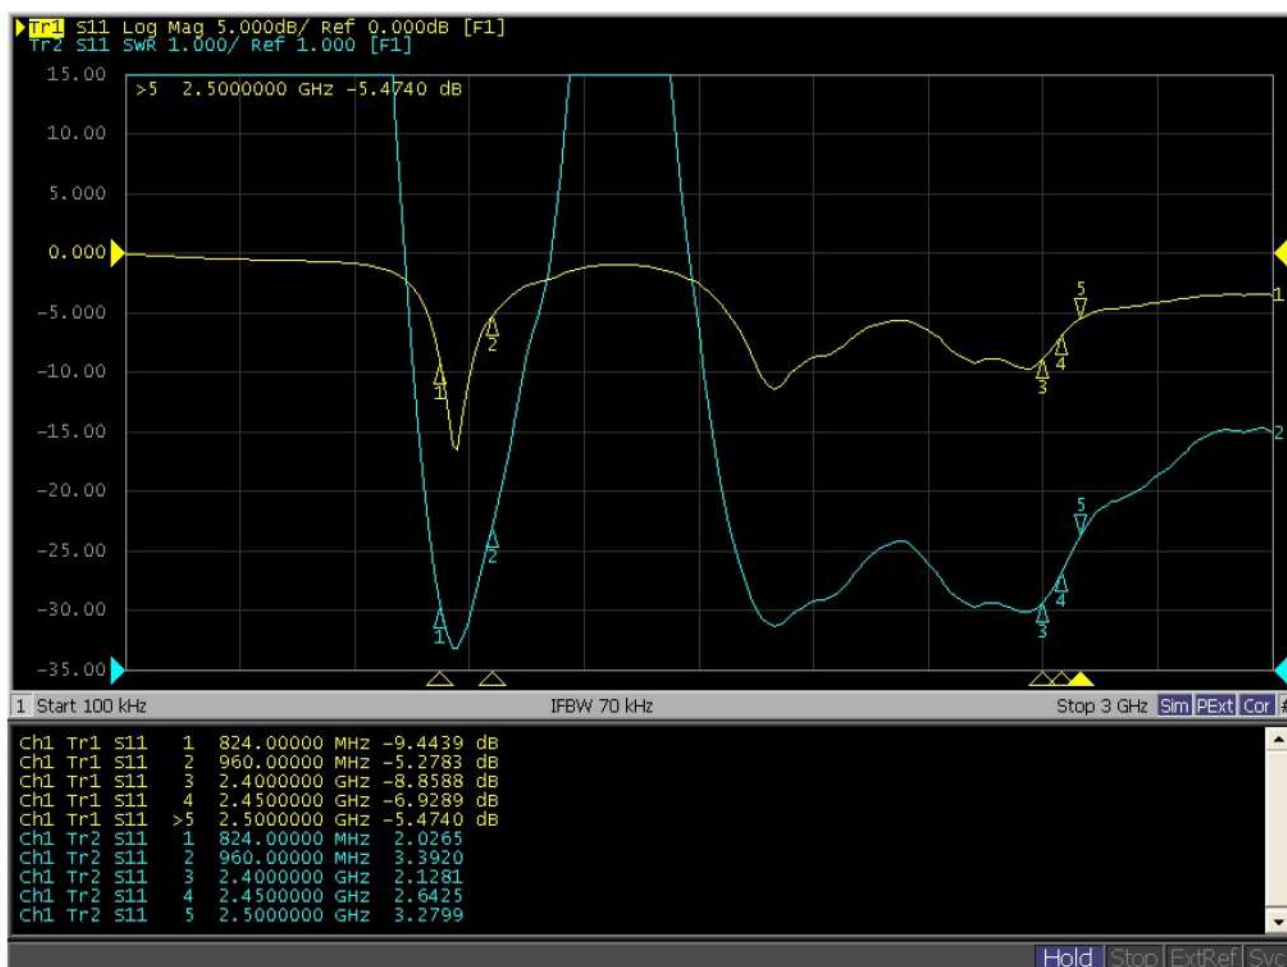

Antenna Return loss and VSWR


Frequency (MHz)	824MHz	960MHz	2400MHz	2450MHz	2500MHz
Return Loss (dB)	-9.44	-5.27	-8.85	-6.92	-5.47
VSWR	2.02	3.39	2.12	2.64	3.27

Gain and Efficiency


(Ground length: 107mm)

Antenna peak gain parameter summary


Frequency	824	960	2400	2450	2500
Peak Gain(dBi)	0.84	0.08	2.61	2.20	1.18
Efficiency(%)	55.26	47.92	48.05	42.62	35.36

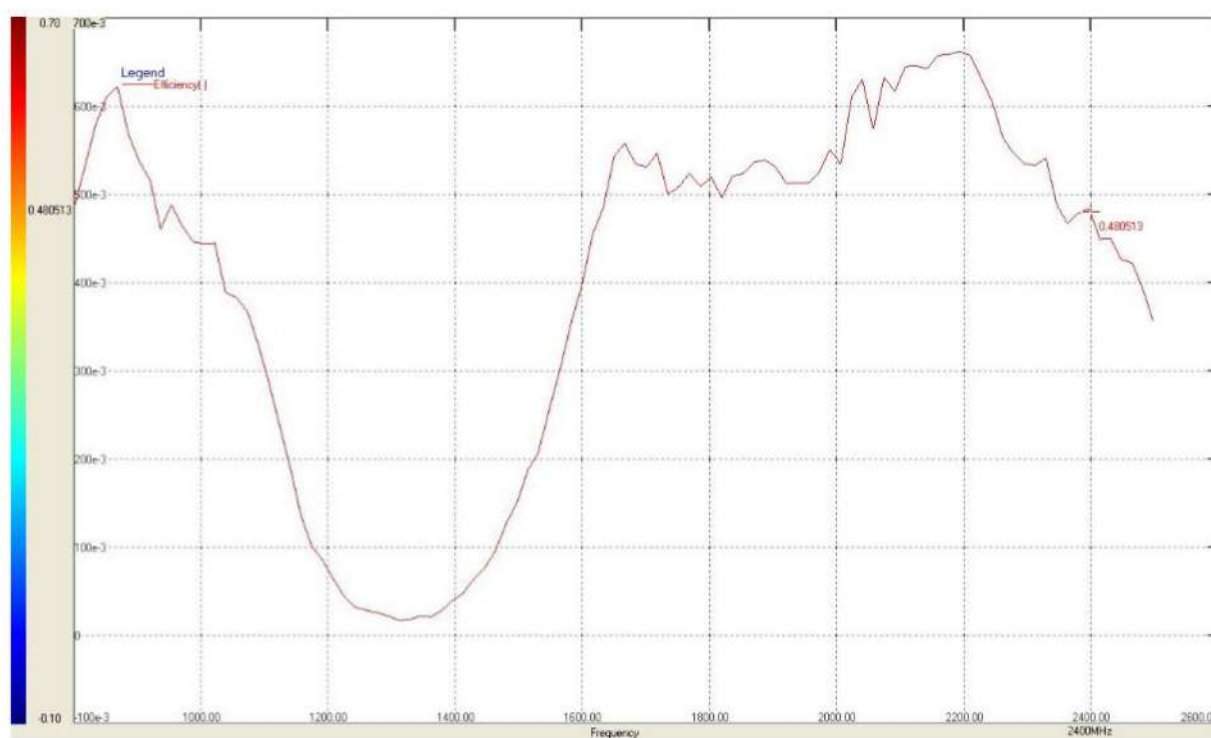


3D Radiation Pattern

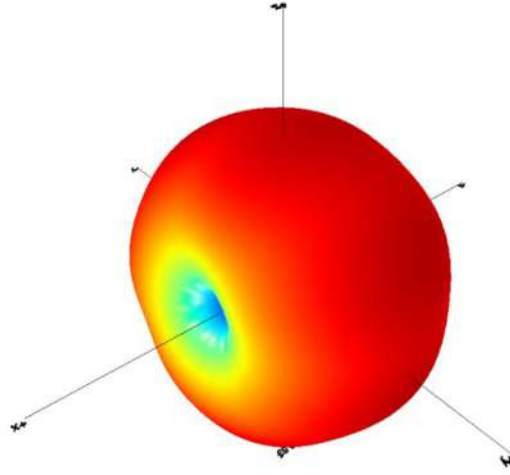

824MHz

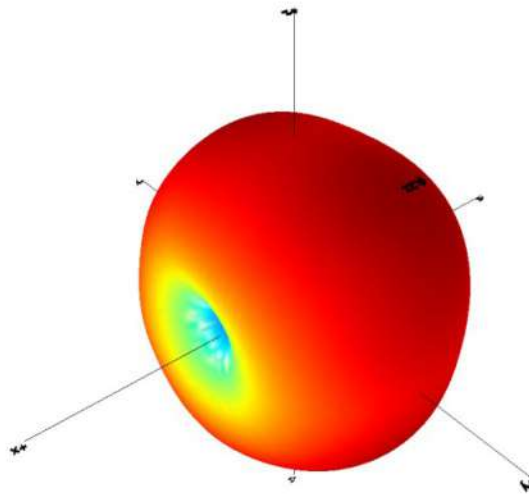

960MHz

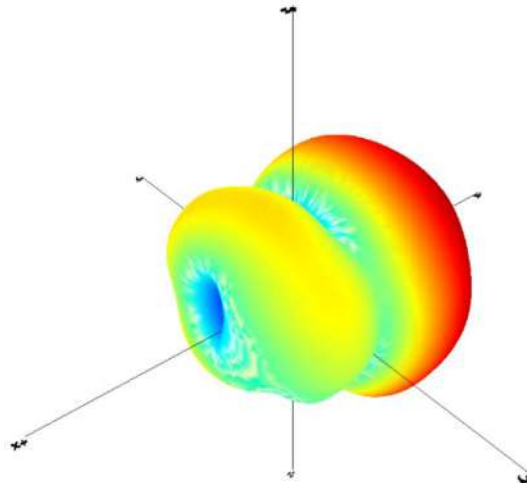

2450MHz

Environmental Conditions

Operating conditions

The antenna has the electrical characteristics given in Tables 1 in the temperature range of -40°C to $+85^{\circ}\text{C}$ and under the environmental conditions of $+40^{\circ}\text{C}$ and 0-95 % r.h..

Storage temperature range

The storage temperature range of product is -40°C to $+85^{\circ}\text{C}$

Reliability Tests

Low-temperature test

Expose the specimen to -40 for 16 hours and then to normal temperature/ humidity for 24 hours or more. After this test, examine its appearance and functions.

High-temperature test

Expose the specimen to $+85^{\circ}\text{C}$ for 16 hours and then to normal temperature/ humidity for 24 hours or more. After this test, examine its appearance and functions.

High-temperature/high-humidity test

Subject the object to the environmental conditions of $+85^{\circ}\text{C}$ and 90-95% r.h. for 96 hours, then expose to normal temperature/humidity for 24 hours or more. After this test, examine its appearance and functions.

Thermal shock test

Subject the object to cyclic temperature change (-30°C , 30 minutes \leftrightarrow $+85^{\circ}\text{C}$, 30 minutes) for 5 cycles, the expose to normal temperature/humidity for 24 hours or more.

Vibration test

Sinusoidal vibration test

Subject the object to vibrations of 5 to 200 to 5Hz swept in 10 minutes, 4.5G at maximum (2mm amplitude), in X and Y directions for two hours each and in Z direction for four hours. After this test, examine its appearance functions.

Vibration test in packaged condition

Subject the object, which is packaged as illustrated, to vibrations of 15 to 60 to 15Hz swept in 6 minutes, 4G at maximum (2mm amplitude at maximum), applied in X, Y and Z directions for two hours each, i.e. six hours in total. After this test, examine its appearance and functions.

Free fall test in packaged condition

Drop the object, which is packaged as illustrated, to a concrete surface from the height of 90 cm, on one comer, three edges and six faces once each, i.e. 10 times in total. After this, check the appearance and functions.

Soldering Heat Resistance Test:

After the lead pins of the unit are soaked in solder bath at $270 \pm 5^{\circ}\text{C}$ for 10 ± 0.5

seconds and then be left for more than 1 hour at $25\pm 5^{\circ}\text{C}$ in less than 65% relative humidity.

Adhesion Test:

The device is subjected to be soldered on test PCB. Then apply 0.5Kg (5N) of force for 10 ± 1 seconds in the direction of parallel to the substrate. (the soldering should be done by reflow and be conducted with care so that the soldering is uniform and free of defect by stress such as heat shock) .

Inspection

As for the examination in the mass production, the receiving character of the ratio wave sent in a shield box from the standard antenna and VSWR are confirmed in the picking out examination.

Warranty

If any defect occurs from the product during proper use within a year after delivery, it will be repaired or replaced free of charge.

Other


Any question arising from this specification manual shall be solved by arrangement made by both parties.

Precautions for Use

- Antenna pattern use a Ag electrode.
- Please don't use the corrosion gas (sulfur gas, chlorine gas) in the atmosphere.
- Please don't direct solder onto the gold electrode of Antenna pattern.


Drawings

Shape and Dimension

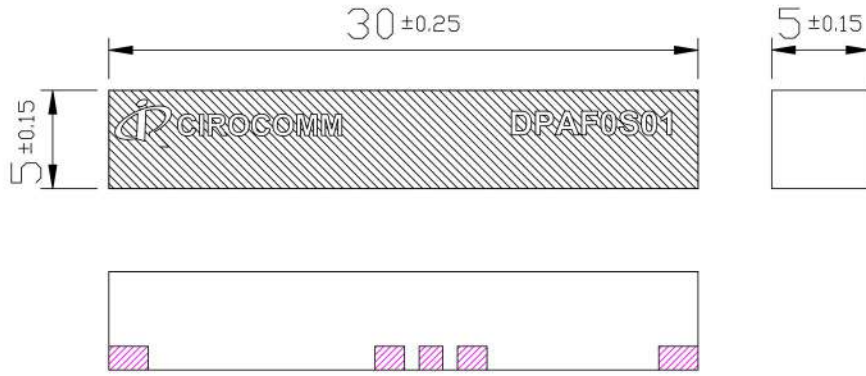



Unit:mm

Customers Requirement Layout Dimension

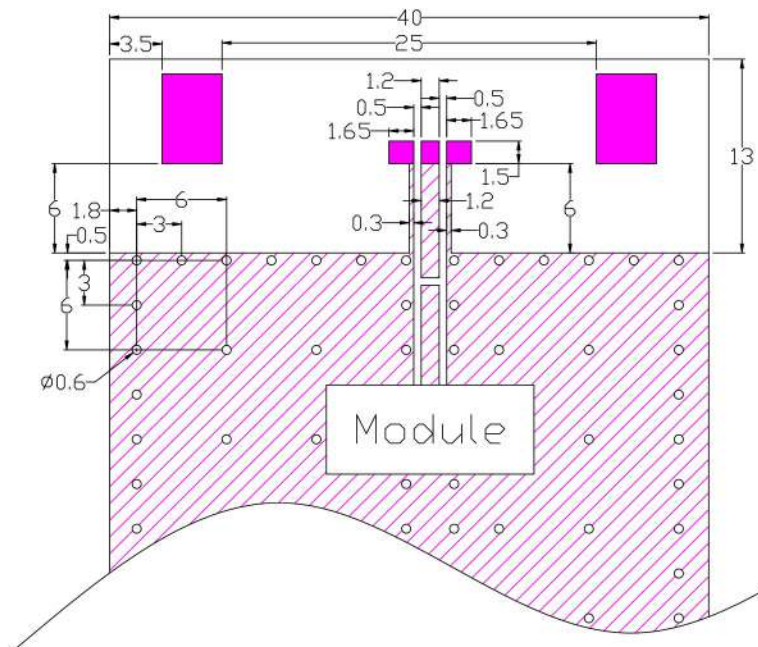


Antenna Environment on Demo Board

Matching Circuit

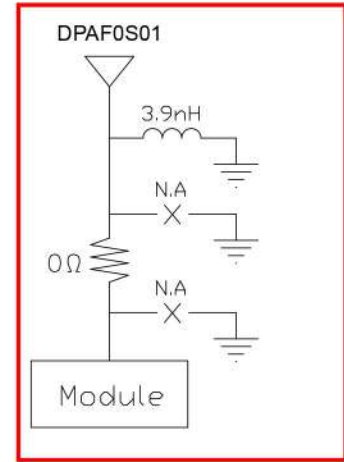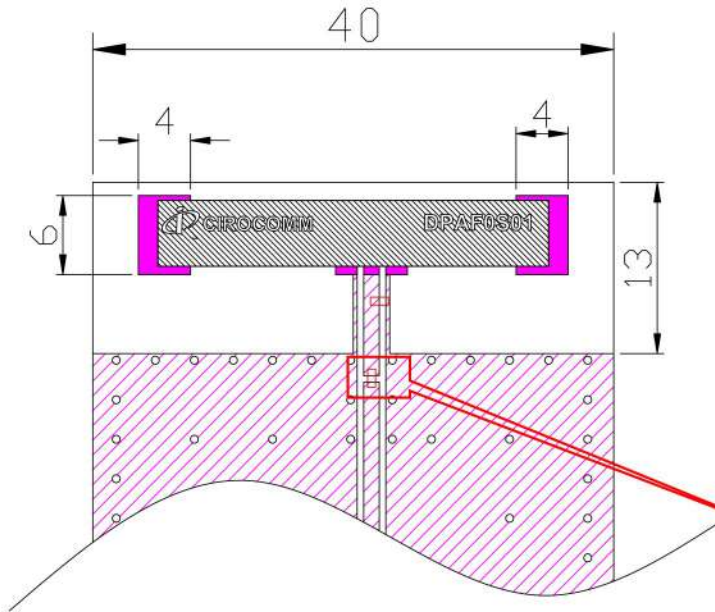


Pi type matching.

Between antenna and module need a pi type matching circuit.

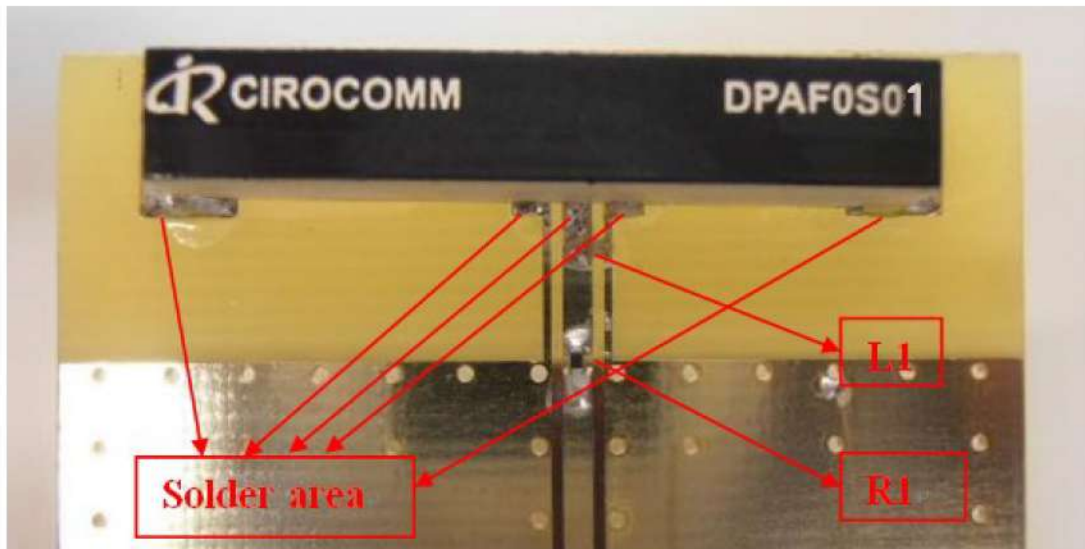

Circuit Symbol	Size	Description
L1	0402	3.9nH Inductor(MLK1005S3N9S)
R1	0402	0Ω (RM04JTNO)

Test Board Dimensions

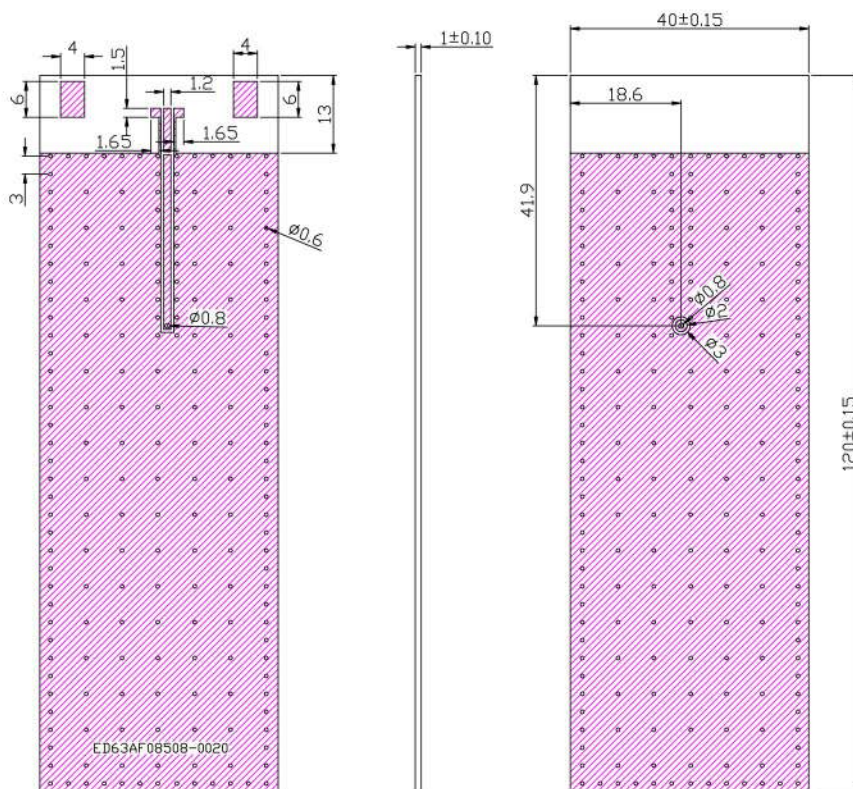


The test board is designed for evaluation purposes


Delivery Mode

1 Blister tape to IEC 286-3 , polyester ◦

2 Pieces/tape : 450

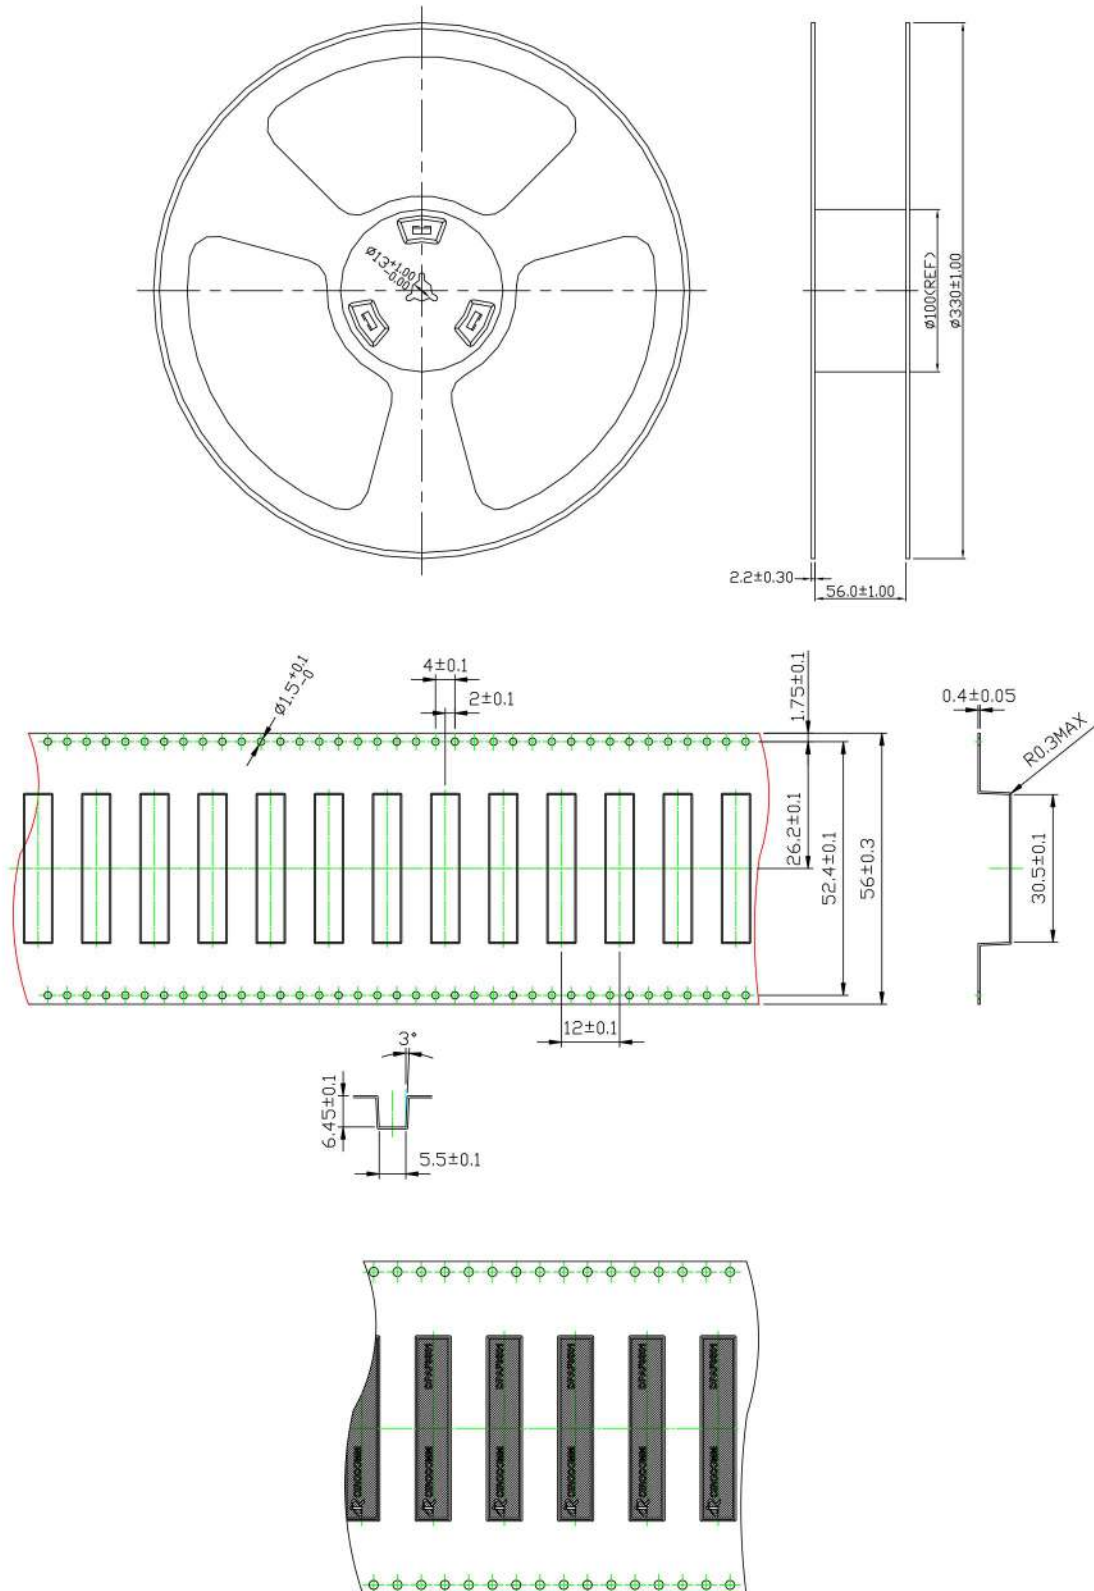

Transmission Line and Matching

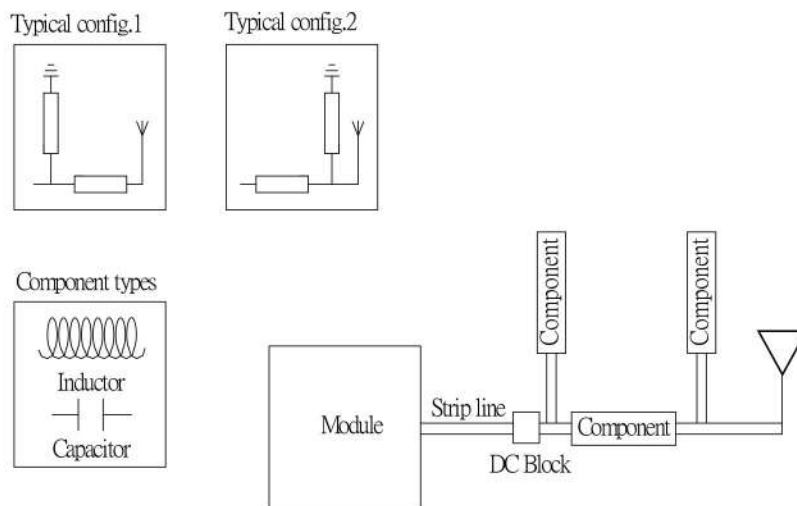

The matching network has to be individually designed using one, two or three components.


Recommended Reflow Soldering Profile

Cirocomm products can be assembled following Pb-free assembly. According to the Standard **IPC/JEDEC J-STD-020C**, the temperature profile suggested is as follow:

Phase	Profile features	Pb-Free Assembly (SnAgCu)
PREHEAT	-Temperature Min(Tsmin) -Temperature Max(Tsmax) -Time(ts) form (Tsmin to Tsmax)	150°C 200°C 60-120 seconds
RAMP-UP	Avg. Ramp-up Rate (Tsmax to TP)	3°C/second(max)
REFLOW	-Temperature(TL) -Total Time above TL (t L)	217°C 30-100 seconds
PEAK	-Temperature(TP) -Time(tp)	260°C 20-30 second
RAMP-DOWN	Rate	6°C / second max.
Time from 25°C to Peak Temperature		8 minutes max.
Composition of solder paste		96.5Sn/3Ag/0.5Cu
Solder Paste Model		SHENMAO PF606-P26

Note : All the temperature measure point is on top surface of the component, if temperature over recommend, it will make component surface peeling or damage.

The graphic shows temperature profile for component assembly process in reflow ovens

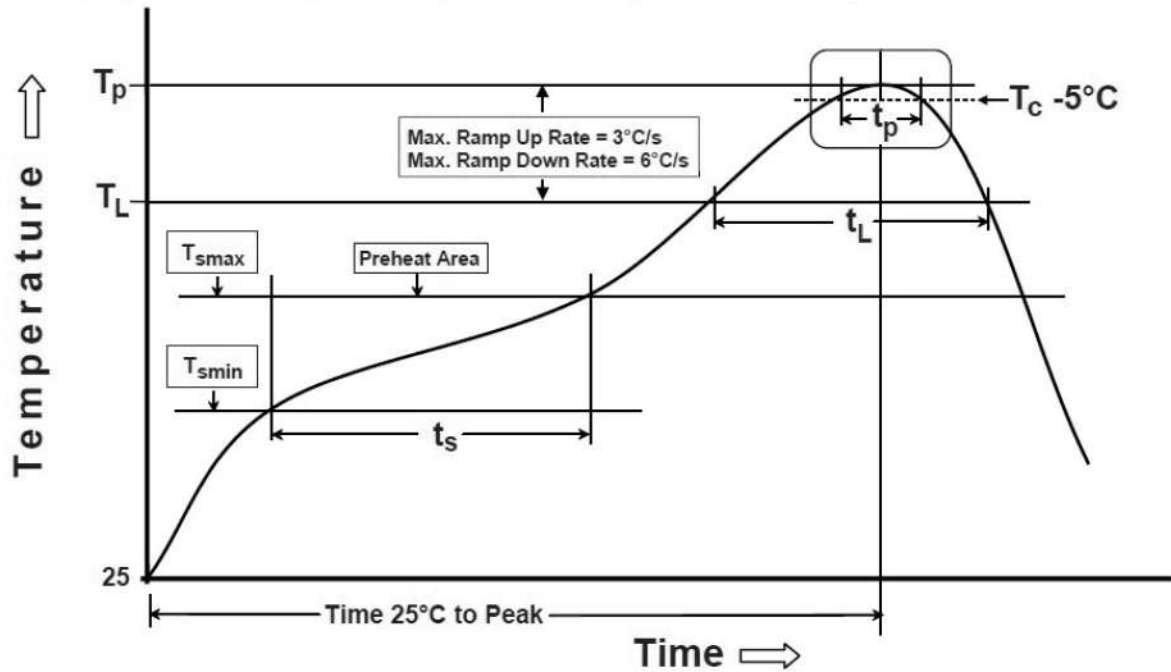

Soldering With Iron:

Soldering condition : Soldering iron temperature $270 \pm 10^\circ\text{C}$.

Apply preheating at 120°C for 2-3 minutes. Finish soldering for each terminal within 3 seconds, if soldering iron over temperature $270 \pm 10^\circ\text{C}$ or 3 seconds, it will make component surface peeling or damage. Soldering iron can not leakage of electricity.