




wireless@otto.co.za • +27 11 791 1033
OFFICIAL SOUTH AFRICAN DISTRIBUTOR

TERMINALS

Cinterion® 4G LTE Terminals

LTE Cat 1 with 2G/3G fallback optimized for M2M IoT Solutions

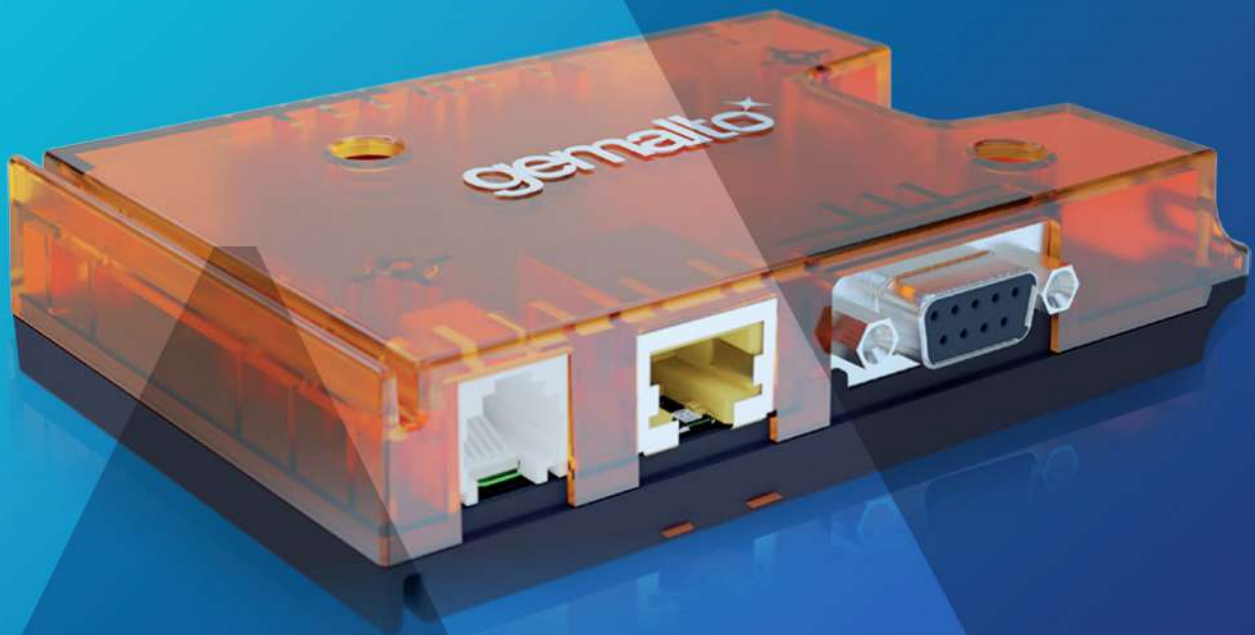

Cinterion® 4G LTE Terminal

LTE Cat 1 IoT Gateway powered
by Java



4G LTE Terminals



Multi Band LTE Cat 1



Ethernet Interface (ELS61T only)



Embedded TCP / IP Stack



FOTA configurable & royalty-free



USB 2.0 (PLS62T-W only)



3G HSPA 2G GSM



Java embedded



Advanced Temperature Management



RLS Monitoring (Jamming Detection)



Flexible Mounting

Thales's new suite of Cinterion LTE Cat1 Smart Terminals brings new simplicity to M2M. Leveraging Thales's next-generation Java embedded technology, the plug-and-play solutions powered by the multi-band LTE Cat-1 basebands with seamless fallback to 3G and/or 2G enable secure wireless TCP/IP connectivity anywhere in the world for a variety of industrial applications such as metering, remote monitoring, transportation, security and many more. The Cinterion ELS61T gateways come in regional versions providing universal industrial interfaces e.g. Ethernet or serial RS232 are encased in a compact, unprecedented

mounting options. They provide first time IoT developers and small-scale implementers with a flexible, cost effective solution to quickly launch enterprise optimization solutions that expand the Internet of Things. Optional features include embedded component SIM (MIM) and a cloud based SensorLogic application enablement platform that enable out-of-the-box M2M communication reducing integration complexity and Total Cost of Ownership. Like all Cinterion products, the SMART 3G terminals come with full type approval (FTA) and are certified by the largest carriers worldwide.

Plug-and-Play with Most Flexible Mounting



Plug & Play

ELS61 Terminal is a simple and reliable plug-and-play communication device that allows new M2M implementers to quickly connect their industrial applications using wireless technology. With very little integration and approval efforts, it provides a cost effective, swift solution for enterprise

optimization technology. Alternative Power over Ethernet (PoE) for the ELS61T offers two additional benefits: further cost savings and flexibility of device placement. Because PoE runs data and power together over the same cable to each device attached to the local area network (LAN), devices can be installed without additional power supply and without concern for the proximity to individual AC outlets.

Embedded Java™

Java offers easy and fast application development, a broad choice of tools, high code reusability, easy maintenance, a proven security concept, on-device debugging as well as multi-threading programming and program execution.

Highly Flexible Mounting Concept

Encased in robust plastic housing, the miniaturized terminal works in virtually any application providing secure 24/7 connectivity. For quick and easy implementation, the terminal is compatible with a variety of mounting schemes including: IN rail mounting, C-rail mounting, Screw fixing or use of cable ties.

Terminal Variants

| Productname | Region | Ethernet | USB | Java™ | Frequency Bands |
|----------------|---------------|----------|-----|-------|---|
| ELS61T-E LAN | EMEA | • | | • | LTE (1,3,8,20,28), 2G Dual Band |
| ELS61T-US LAN | USA (AT&T) | • | | • | LTE (2,4,5,12), 3G (2,4,5) |
| ELS31T-V LAN | USA (Verizon) | • | | | LTE (4,13) |
| ELS61T-AUS LAN | Australia | • | | • | LTE (3,5,8,28), 3G (1,5,8) |
| ELS31T-J LAN | Japan | • | | | LTE (1,18,19) |
| PLS62T-W USB | Global | | • | • | LTE (1,2,3,4,5,7,8,12(17),18,19,20,28), 3G (1,2,4,5,8,9,19), 2G Quad Band |

Common to all are multiple GPIO's, RS-232, I²C and SPI via Weidmüller connector.

Cinterion® 4G LTE Terminals Features

General Features

- 3GPP Rel.7 Compliant Protocol Stack
- Multiband LTE Cat1 3G, 2G depending on variant
- SIM Application Toolkit, letter class "b", "c", "e"
- Control via standardized and extended AT commands (Hayes, TS 27.007 and 27.005)
- TCP/IP stack access via AT command and transparent TCP services
- Secure Connection for client IP services
- Internet Services TCP/UDP server/client, DNS, Ping, FTP client, HTTP client
- PoE - Power over Ethernet, optional

- Supply voltage range 8 – 30 V
- Dimension: 115 x 86 x 26 mm (incl. connectors)
- Weight: approx 130g
- Operating Temperature: -30 °C to +65 °C

Specifications

- LTE Cat.1 data rates
DL: max 10.3Mbps UL: max. 5.2 Mbps
- HSPA+ Cat.8 (ELS61-US) data rates
DL: max. 7.2 Mbps, UL: max. 5.76 Mbps
- GPRS Class 12 data rates
DL: max. 85.6 kbps, UL: max. 85.6 kbps
- SMS text and PDU mode support