

## GSM28

900/1800/1900/2100 MHz OMNI 4dBi FOR N FEMALE + L TYPE MOUNT



## Electrical Specifications

Model No: GSM-28

Frequency: 900MHz ; 1800MHz ; 1900MHz ; 2100MHz

Antenna Type: OMNI

Gain: 4dBi

VSWR: <1.7

Polarization: Linear Vertical

Impedance: 50Ω

Power Handling: 50W

## Mechanical Specifications

Antenna Mount: L TYPE

Connector: N FEMALE

Operating Temperature -40°C ~ +65°C

Humidity: 100%@25°C


Lightning Protection: Direct Ground

Radome color: White


Radome material: Fiberglass

Dimensions: 400mm × 19mm × 19mm

GSM-28 900/1800/1900/2100 MHZ OMNI 4dBi FOR N JACK+L TYPE MOUNT

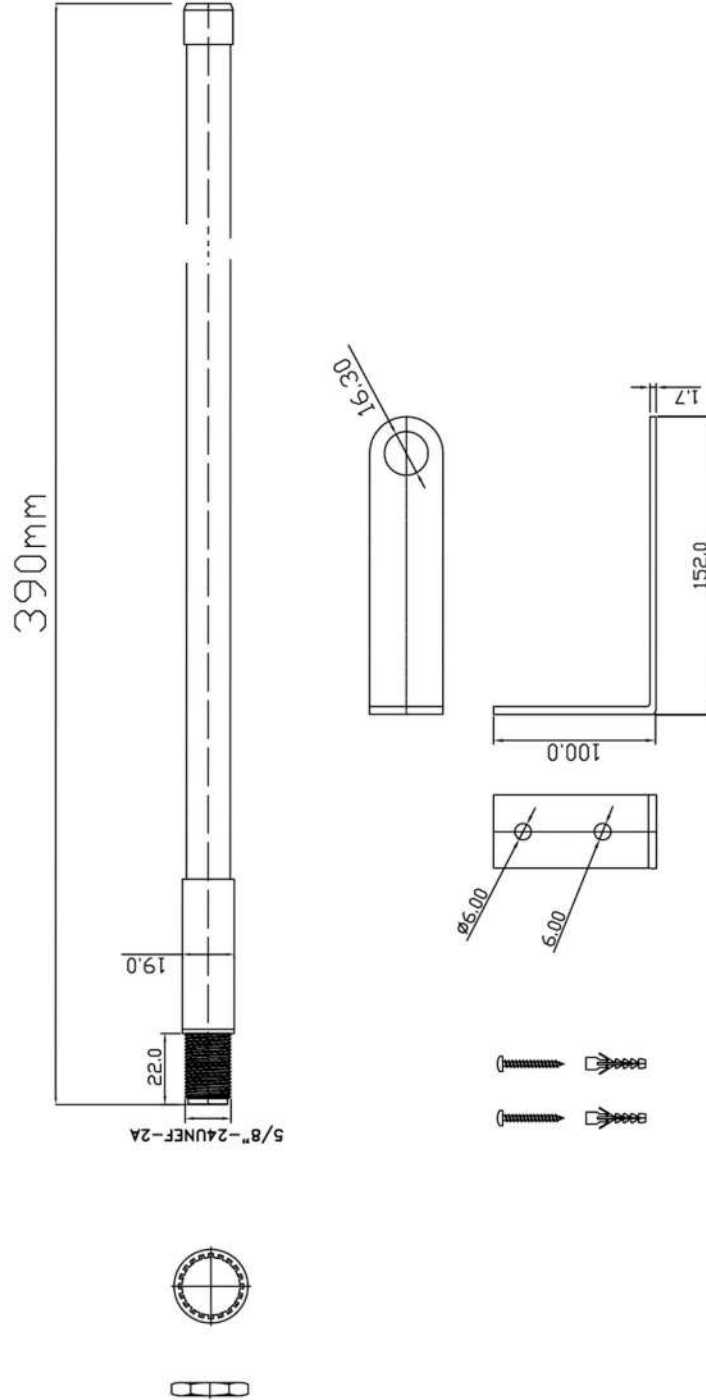


1	FREQUENCY RANGE : 900/1800/1900/2100 MHZ	8	Antenna Connector : N FEMALE
2	GAIN : 4 dBi	9	
3	VSWR : < 1.7 : 1	10	
4	IMPEDANCE : 50 Ω	11	
5	POLARIZATION : Vertical	12	
6	Dimensions : L400xW19xH19 mm	13	
7	Antenna Type : OMNI		

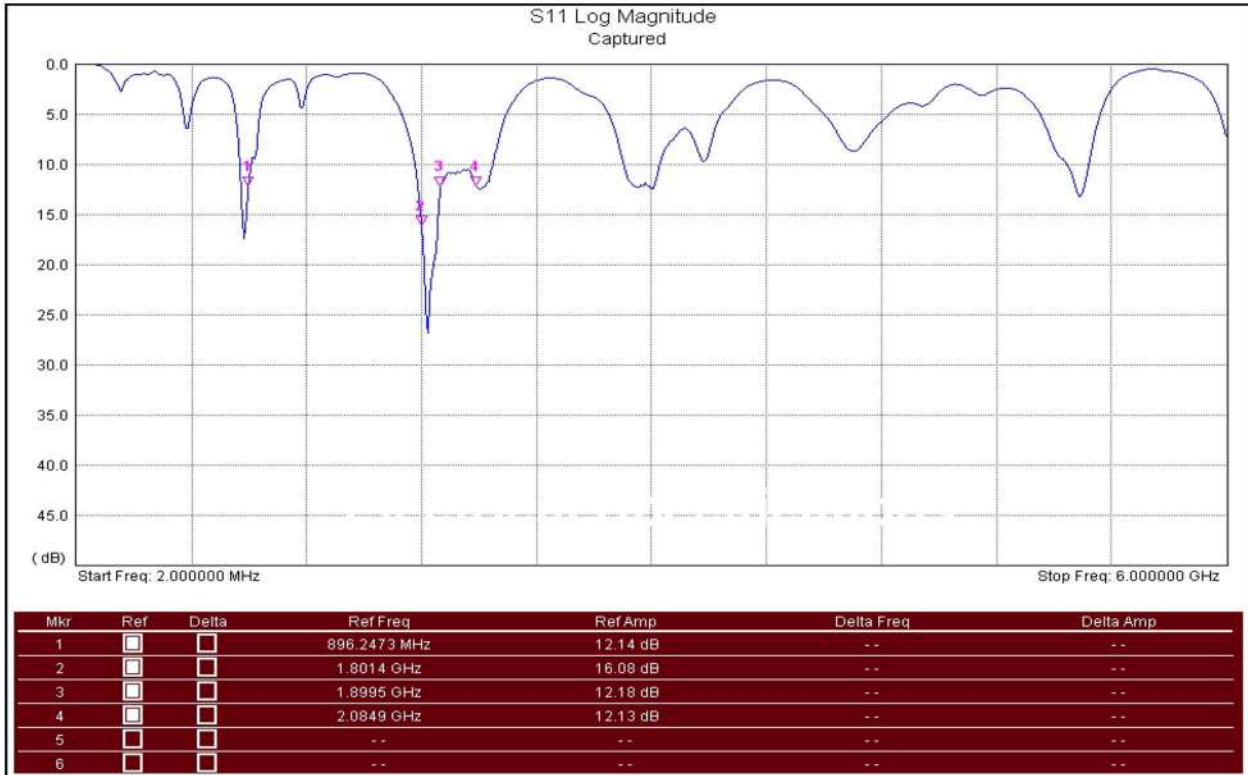

**Measurement Parameters**


Calibration Status	On	Ref. Plane Leng	0
Cal Mode	Standard		
Data Points	551	Serial Number	651009
Output Power	High	Base Ver.	V1.48
Start Frequency	2.000000 MHz	App Ver.	V1.48
Stop Frequency	6.000000 GHz	Date	8/27/2009 2:04:40 PM
Smoothing %	0	Device Name	

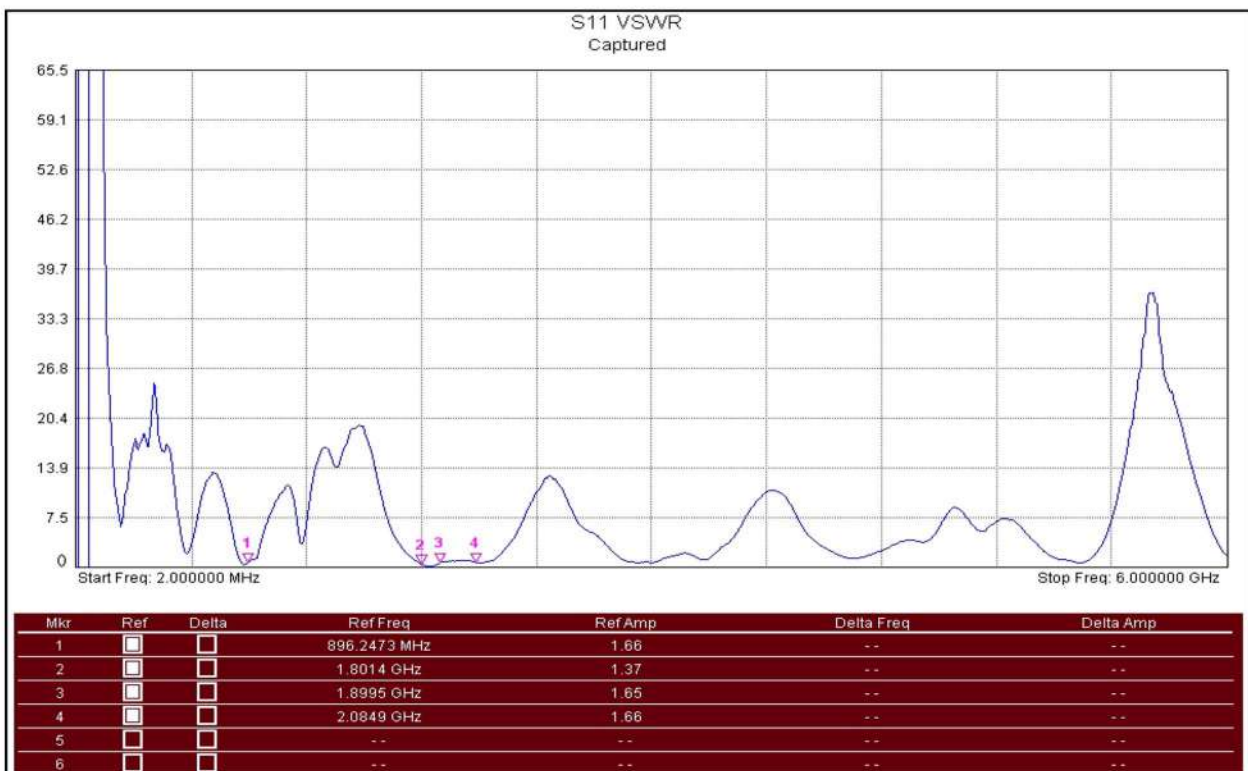

**Measurement Parameters**

Calibration Status	On	Ref. Plane Leng	0
Cal Mode	Standard		
Data Points	551	Serial Number	651009
Output Power	High	Base Ver.	V1.48
Start Frequency	2.000000 MHz	App Ver.	V1.48
Stop Frequency	6.000000 GHz	Date	8/27/2009 2:04:40 PM
Smoothing %	0	Device Name	

H-PLANE

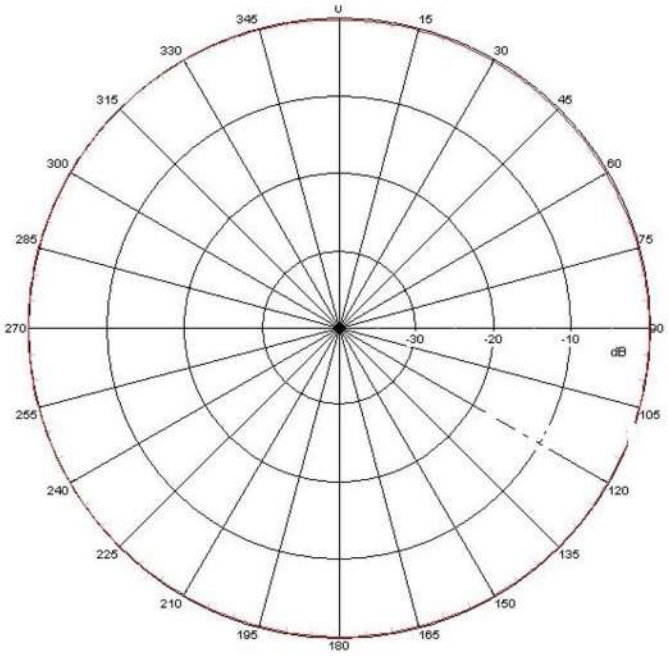

E-PLANE

