

GSM 03

850/900/1800/1900MHz 3dBi Patch Type + RG174



Product Specifications

Frequency: 850 / 900 / 1800 / 1900 MHz

VSWR: <1.8 : 1

Gain: Unity (3dBi)

Power: 10W

Connector: SMA

Bandwidth: Broad band

Impedance: 50Ω




E-Plane Beam Width: 100 degree


Polarization: Vertical

Dimensions: 132 x 22 x 7mm

Mounting: Double tape


Cable: 3m

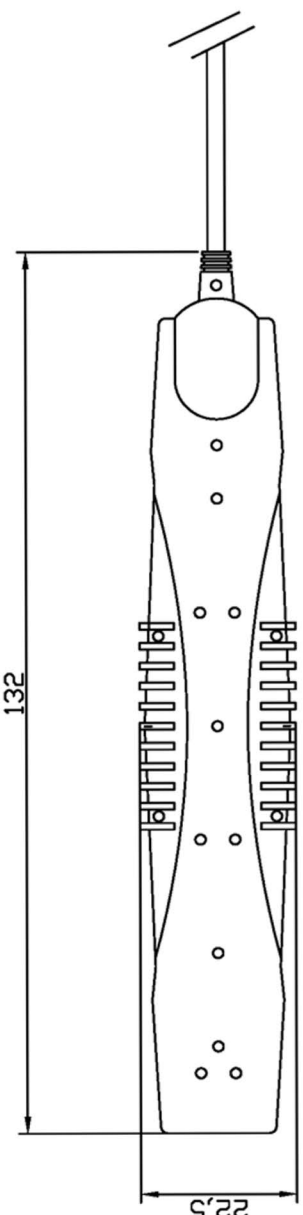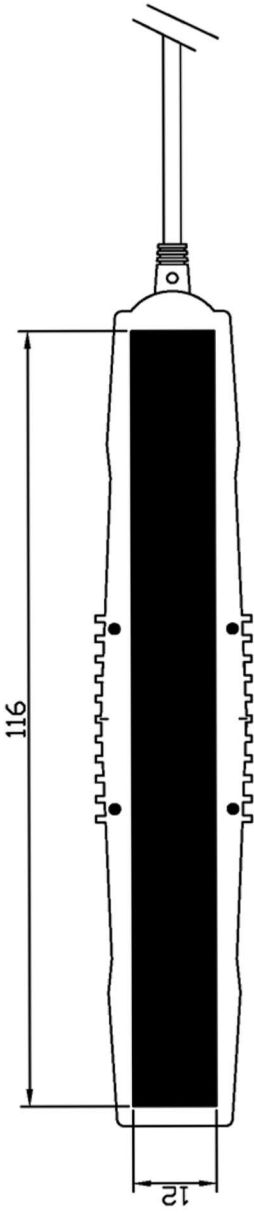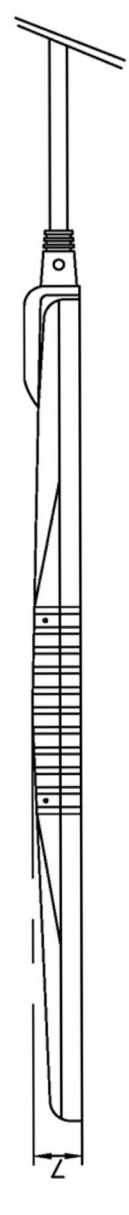GSM - 03 900 - 1800MHz 3dBi			
			
			
1	FREQUENCY : 900 - 1800MHz	6	IMPEDANCE : 50 Ω
2	GAIN : 3dBi	7	
3	V.S.W.R : < 1.8 : 1	8	
4	LENGTH : 132x22x7 mm	9	
5	CONNECTOR : FME SMA ...	10	

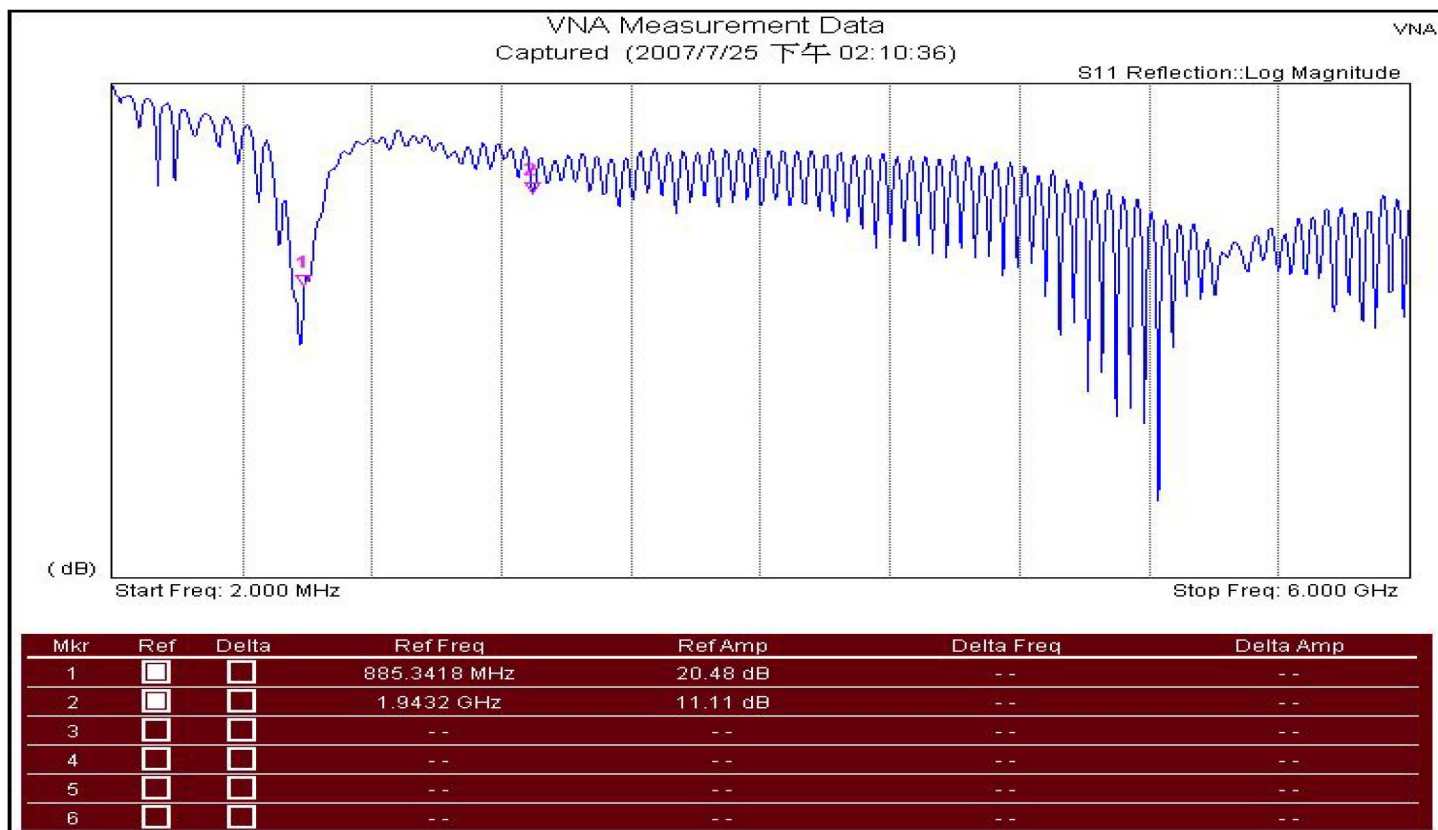

Measurement Parameters


Calibration Status	On	Serial Number	651009
Data Points	551	Base Ver.	V1.48
Output Power	High	App Ver.	V1.48
Start Frequency	2.000 MHz	Date	2007/7/25 下午 02:10:36
Stop Frequency	6.000 GHz	Device Name	

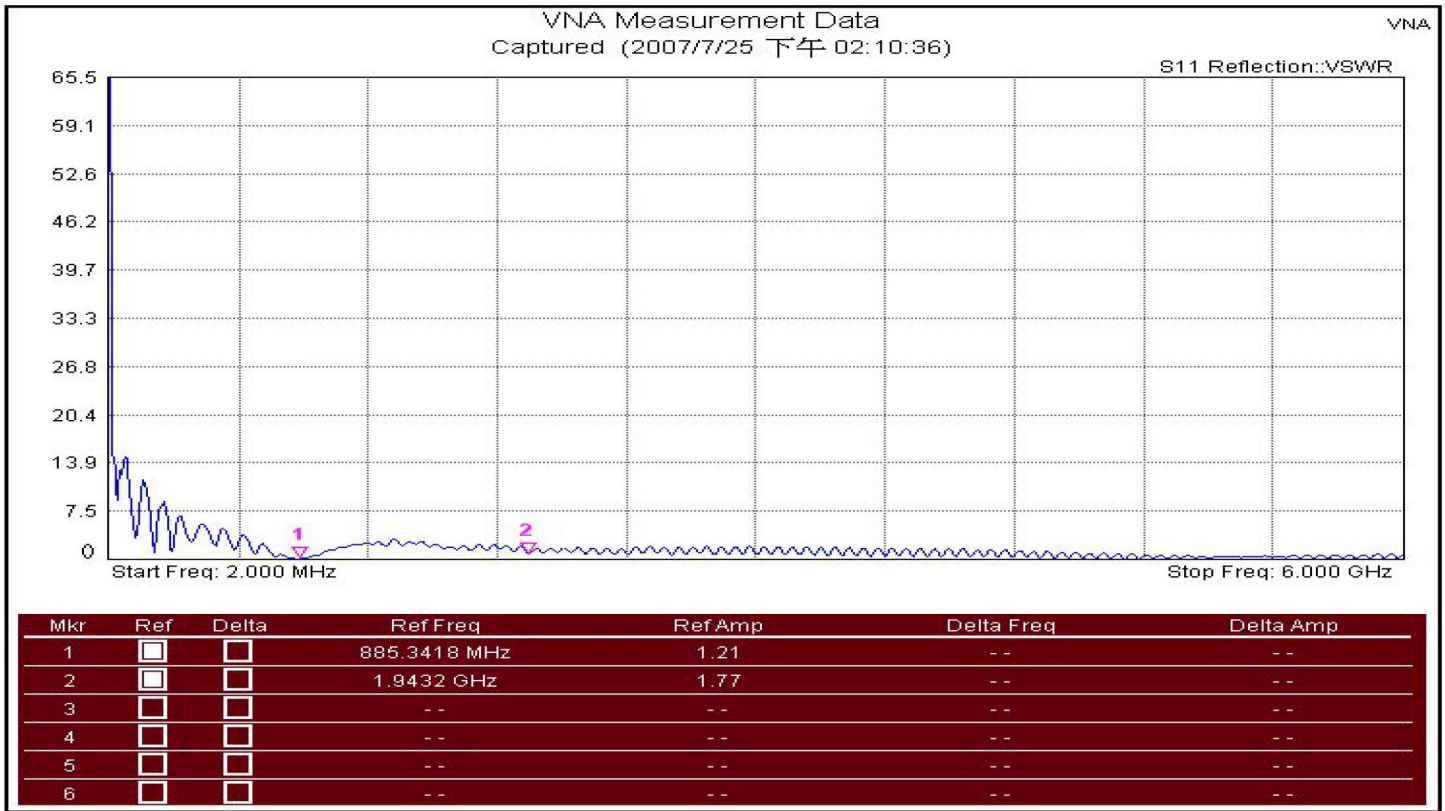

Measurement Parameters

Calibration Status	On	Serial Number	651009
Data Points	551	Base Ver.	V1.48
Output Power	High	App Ver.	V1.48
Start Frequency	2.000 MHz	Date	2007/7/25 下午 02:10:36
Stop Frequency	6.000 GHz	Device Name	

H-Plane

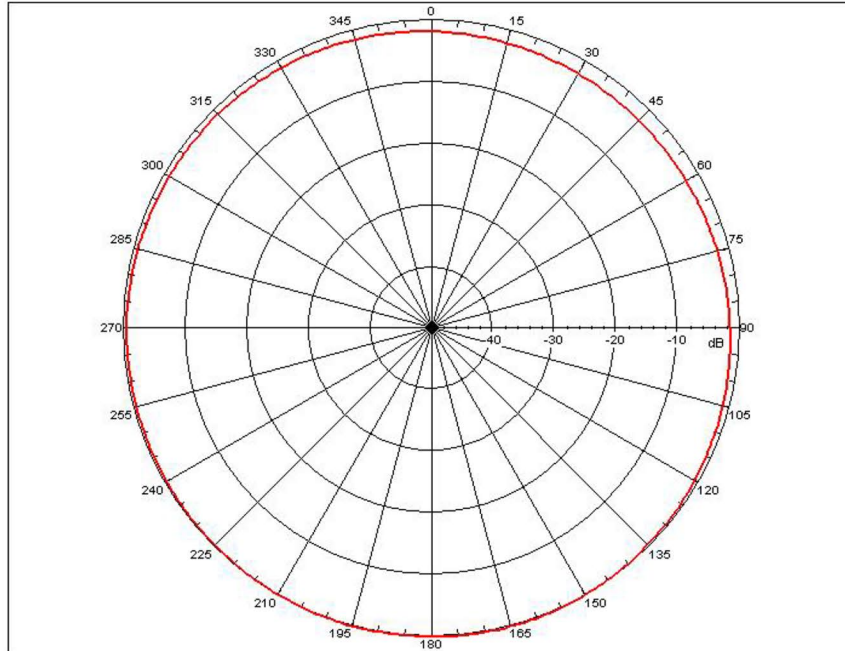

E-Plane

