

GSM 07

GSM T type + RF174 (3M) + FME Jack



Product Specifications

Frequency Range: 824 ~ 960MHz / DCS - 1800MHz /
PCS - 1900 MHz

Gain: 3dBi

Power : 10W


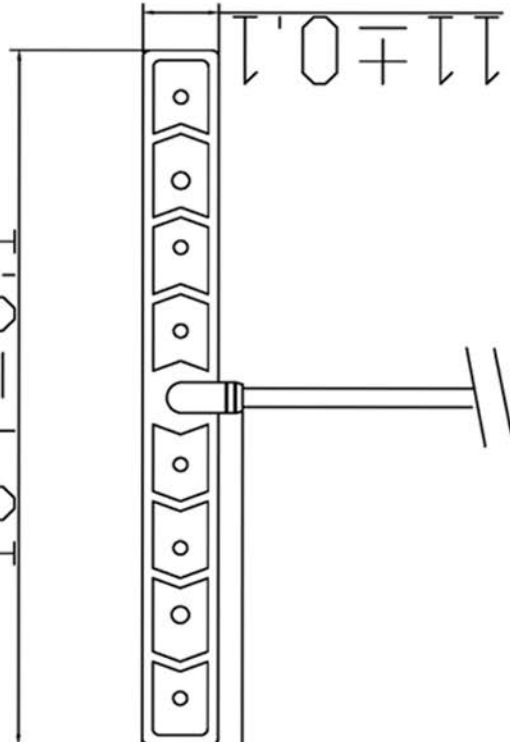
VSWR: ,1.8:1


Polarization: Vertical

Impedance 50Ω

Dimesions: 103 x 11 x 3.5mm

Mounting: Double-sided tape

GSM - 07 900 - 1800MHz 3dBi		104 ± 0,1		104 ± 0,1		14,5 ± 0,1		11 ± 0,1	
									
1	FREQUENCY :	900 - 1800 MHz	6	IMPEDANCE :	50 Ω				
2	GAIN :	3 dBi	7						
3	V.S.W.R :	< 1.5 : 1	8						
4	LENGTH :	103 × 11 × 3.5 mm	9						
5	CONNECTOR :	SMA , FME , SMB ...	10						

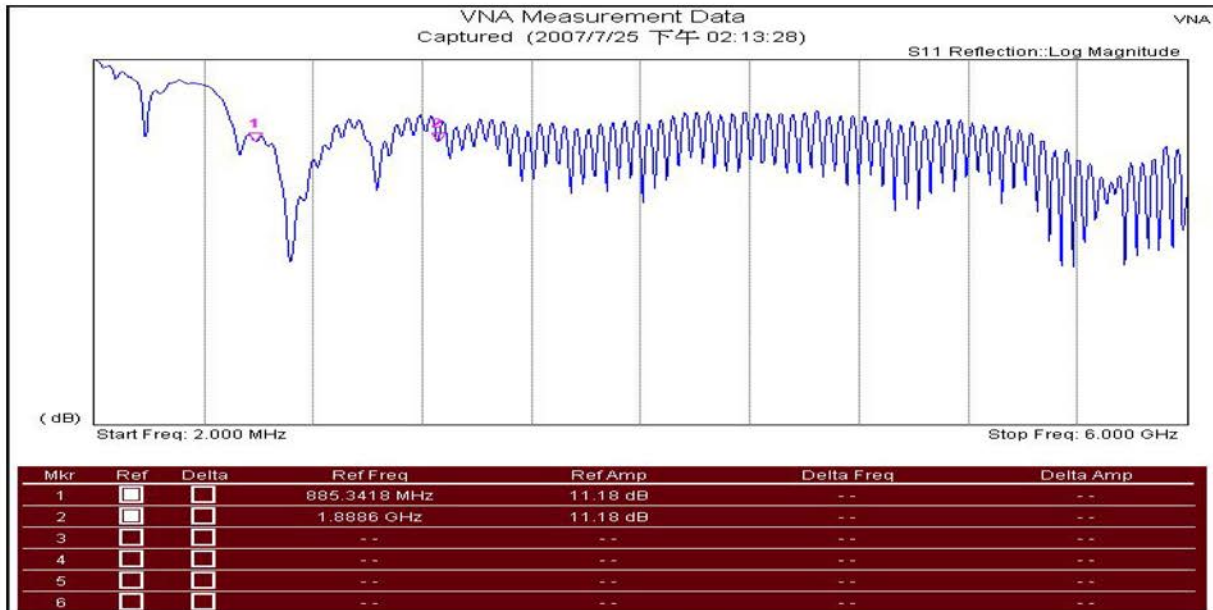


Measurement Parameters			
Calibration Status	On	Serial Number	651009
Data Points	551	Base Ver.	V1.48
Output Power	High	App Ver.	V1.48
Start Frequency	2.000 MHz	Date	2007/7/25 下午 02:13:28
Stop Frequency	6.000 GHz	Device Name	



Measurement Parameters			
Calibration Status	On	Serial Number	651009
Data Points	551	Base Ver.	V1.48
Output Power	High	App Ver.	V1.48
Start Frequency	2.000 MHz	Date	2007/7/25 下午 02:13:28
Stop Frequency	6.000 GHz	Device Name	

H-PLANE

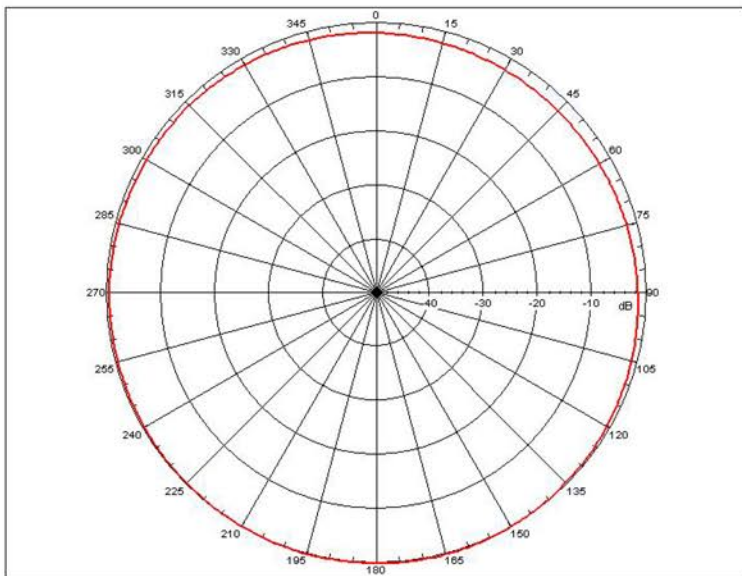

E-PLANE

