


GSM24

GSM 900/1800 MHz YAGI 24dBi+RG58(20m)+FME JACK

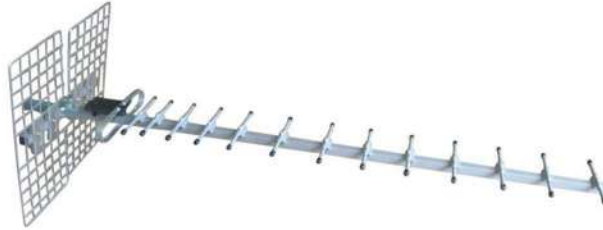

Electrical Specifications

Model No: GSM-24

Frequency: 900MHz ; 1800MHz

Antenna Type: YAGI

Gain: 24dBi

VSWR: <1.5

Polarization: Linear Vertical

Impedance: 50Ω

Power Handling: 50W

Mechanical Specifications

Antenna Mount: L TYPE

Antenna Connector: FME FEMALE


Cable Assembly: FME FEMALE+RG58+FME FEMALE(Option)

L=20M (Option)


Power Handling: 100 W


Size: 1000mm x 300mm x 300mm

H-PLANE

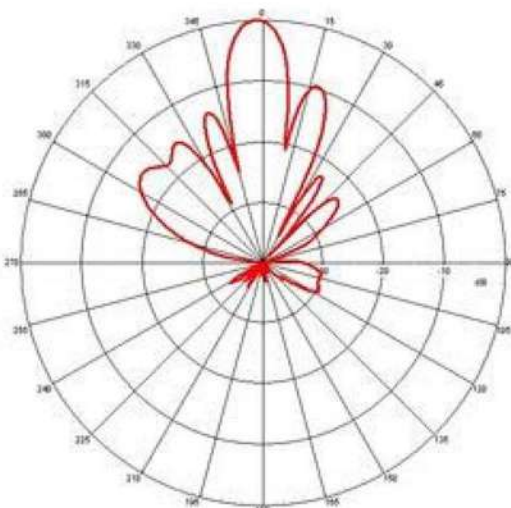

E-PLANE

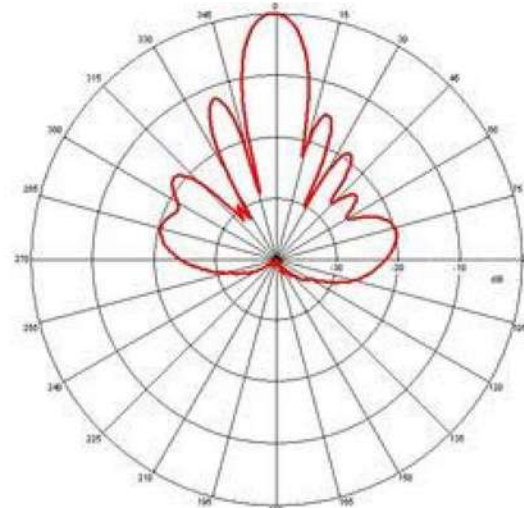


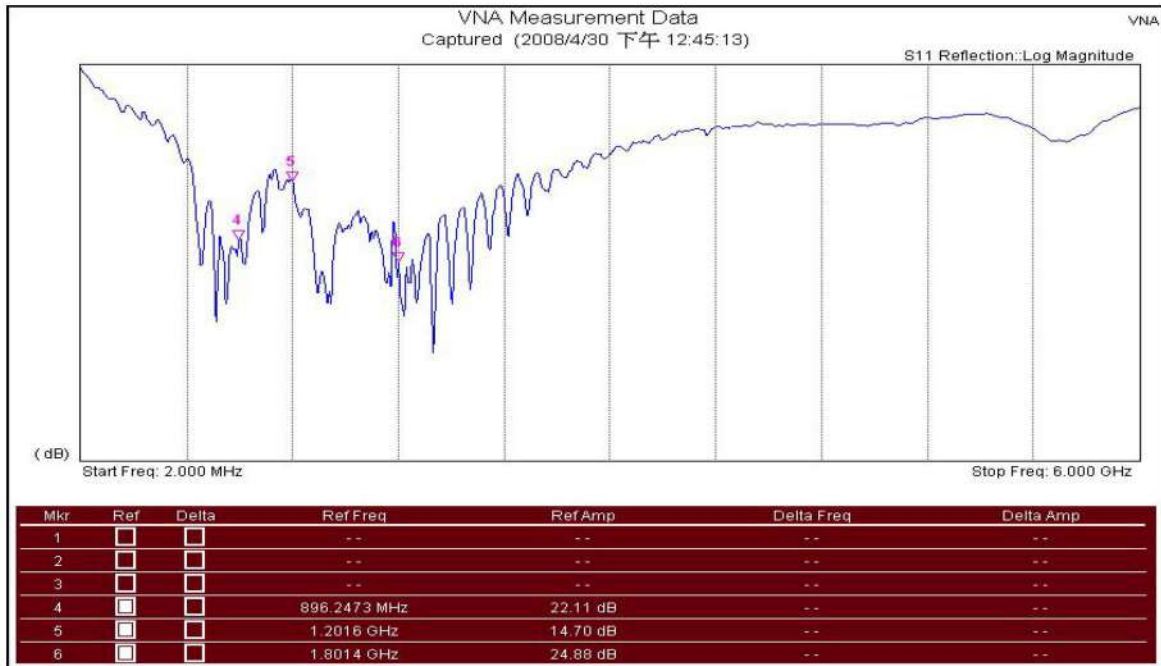

Measurement Parameters			
Calibration Status	On	Serial Number	651009
Data Points	551	Base Ver.	V1.48
Output Power	High	App Ver.	V1.48
Start Frequency	2.000 MHz	Date	2008/4/30 下午 12:45:13
Stop Frequency	6.000 GHz	Device Name	



Measurement Parameters			
Calibration Status	On	Serial Number	651009
Data Points	551	Base Ver.	V1.48
Output Power	High	App Ver.	V1.48
Start Frequency	2.000 MHz	Date	2008/4/30 下午 12:45:13
Stop Frequency	6.000 GHz	Device Name	

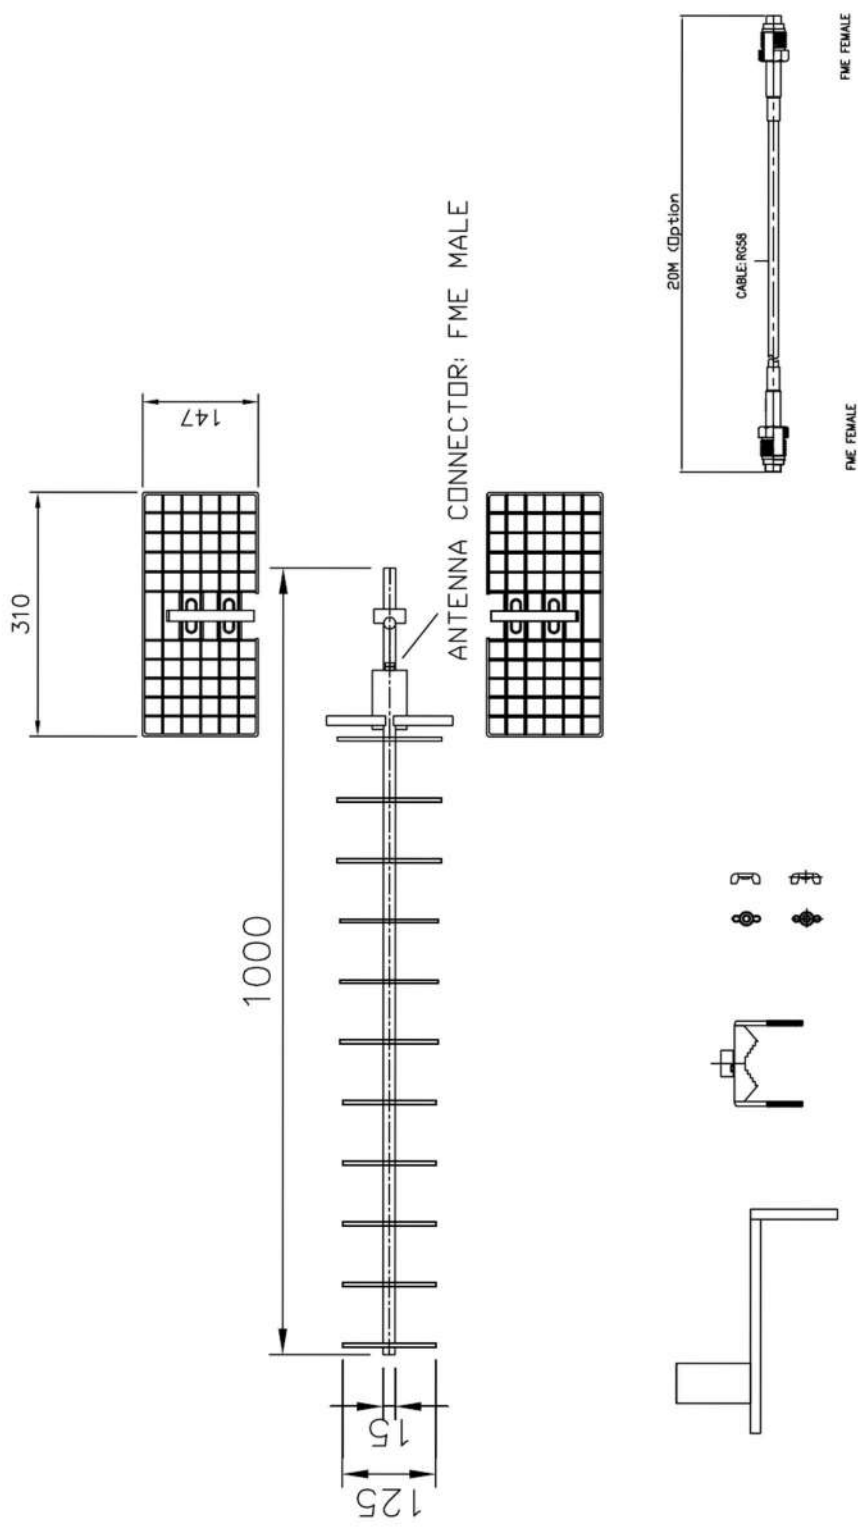GSM-24	<p data-bbox="167 1086 199 1892">GSM 900/1800 MHz YAGI 24dBi+RG58(20M)+FME JACK</p> 		
1	FREQUENCY RANGE : 900/1800 MHz	7	LENGTH : L1000xW300xH300 mm
2	GAIN : 24 dBi	8	CABLE ASSEMBLY : FME FEMALE+RG58+FME FEMALE(Option) L=20M(Option)
3	TYPE : YAGI	9	
4	POWER HANDLING : 100W	10	
5	POLARIZATION : LINEAR VERTICAL	11	
6	VSWR : < 1.5	12	